

WILKINS® Model P1000AXL, TP1100A, TP220, TP3000

Temperature & Pressure and Pressure Relief Valves

Application

Designed for installation on water heating storage vessels to protect against over-temperature or excessive pressure. (Not for steam service)

Standards Compliance

(See below for applicable models and pressure settings)

- CSA Compliance to ANSI Z21.22/CSA 4.4
- Certified to ASME Section IV by National Board
- Meets the requirements of NSF/ANSI/CAN 372 (P1000AXL only)

Materials

Main valve body Cast Brass or Bronze, ASTM B 584
Internals Stainless Steel, 300 Series
Brass, ASTM B 36 and B 16
EP, Silicone
Springs Stainless Steel, ASTM A 313
Probes Epoxy Coated copper tube, FDA approved

Features (T&P valve)

Probe sizes: 2", 3", 4", 5", 8"



P1000AXL

TP1100A

TP220


TP3000

Options


- ☐ E - Model TP1100AE extended body (2.1 in shank)
- ☐ EE - Model TP1100AEE extended body (3.3 in shank)

Accessories


- ☐ Expansion tank (Model XT)
- ☐ Water pressure reducing valve (Model NR3XL)
- ☐ Vacuum Relief Valve (Model VR10XL)
- ☐ Expansion control ball valve (Model BVECXL)




P1000AXL



TP1100A



TP220



TP3000

Dimensions & Weights (do not include pkg.)

MODEL NUMBER	DISCHARGE RATES			RELIEF TEMP	DIMENSIONS											
	PRESS. RELIEF SETTING	ANSI Z21.22/ CSA 4.4	ASME SECTION IV		INLET	OUTLET	A		B		C		D		E (shank)	
	PSI	BTU/HR	BTU/HR		F			in.	mm	in.	mm	in.	mm	in.	mm	in.
P1000AXL-30C	30	-	423,600	N/A	3/4 MNPT	3/4 FNPT	1-5/32	29	1-9/16	40	1-1/4	32	n/a	-	1-3/16	30
P1000AXL-75C	75	-	629,000	N/A	3/4 MNPT	3/4 FNPT	1-5/32	29	1-9/16	40	1-1/4	32	n/a	-	1-3/16	30
P1000AXL-125C	125	200,000	985,000	N/A	3/4 MNPT	3/4 FNPT	1-5/32	29	1-9/16	40	1-1/4	32	n/a	-	1-3/16	30
P1000AXL-150C	150	200,000	1,163,000	N/A	3/4 MNPT	3/4 FNPT	1-5/32	29	1-9/16	40	1-1/4	32	n/a	-	1-3/16	30
TP1100A-2C-150C	150	95,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	3-3/16	81	1-5/16	33	1-3/16	30
TP1100A-4C-75C	75	105,000	300,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30
TP1100A-4C-125C	125	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30
TP1100A-4C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30
TP1100A-4C-175C	175	95,000	-	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	3-3/32	79	1-3/16	30
TP1100A-8C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	9-3/4	248	7-7/8	200	1-3/16	30
TP1100AE-3C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	2-1/8	54	2-3/32	53
TP1100AEE-3C-150C	150	105,000	500,000	210	3/4 MNPT	3/4 FNPT	1-1/4	32	1-5/8	41	4-7/8	124	1-3/32	28	3-5/16	84
TP220-5C-125C	125	205,000	1,619,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	6-7/8	175	4-7/16	113	1-3/4	45
TP220-5C-150C	150	205,000	1,912,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	6-7/8	175	4-7/16	113	1-3/4	45
TP220-8C-150C	150	205,000	1,912,000	210	3/4 MNPT	3/4 FNPT	1-1/2	38	3-15/32	88	10-1/8	257	7-11/16	196	1-3/4	45
TP3000-5C-75C	75	500,000	1,165,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34
TP3000-5C-100C	100	500,000	1,495,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34
TP3000-5C-125C	125	500,000	1,825,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34
TP3000-5C-150C	150	500,000	2,155,000	210	1 FNPT	1 FNPT	1-9/16	40	3-1/2	89	6-7/8	175	4-3/4	121	1-5/16	34
TP3000-8C-150C	150	750,000	3,625,000	210	1 FNPT	1 FNPT	1-3/4	44	4-3/8	111	9-1/4	235	8-5/32	207	5/16	8

Zurn Water, LLC | Wilkins

1747 Commerce Way, Paso Robles, CA U.S.A. 93446 Ph. 855-663-9876, Fax 805-238-5766

In Canada | Zurn Industries Limited

7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, 877-892-5216

www.zurn.com

Rev. G


Date: 3/26

Document No. TP-TP&P-C

Product No. Model P1000AXL, TP1100A, TP220 & TP3000

Typical Installation

Local codes shall govern installation requirements. Unless otherwise specified, the relief valve shall be installed in accordance with manufacturer's instructions and the latest edition of the Uniform Plumbing Code ®.

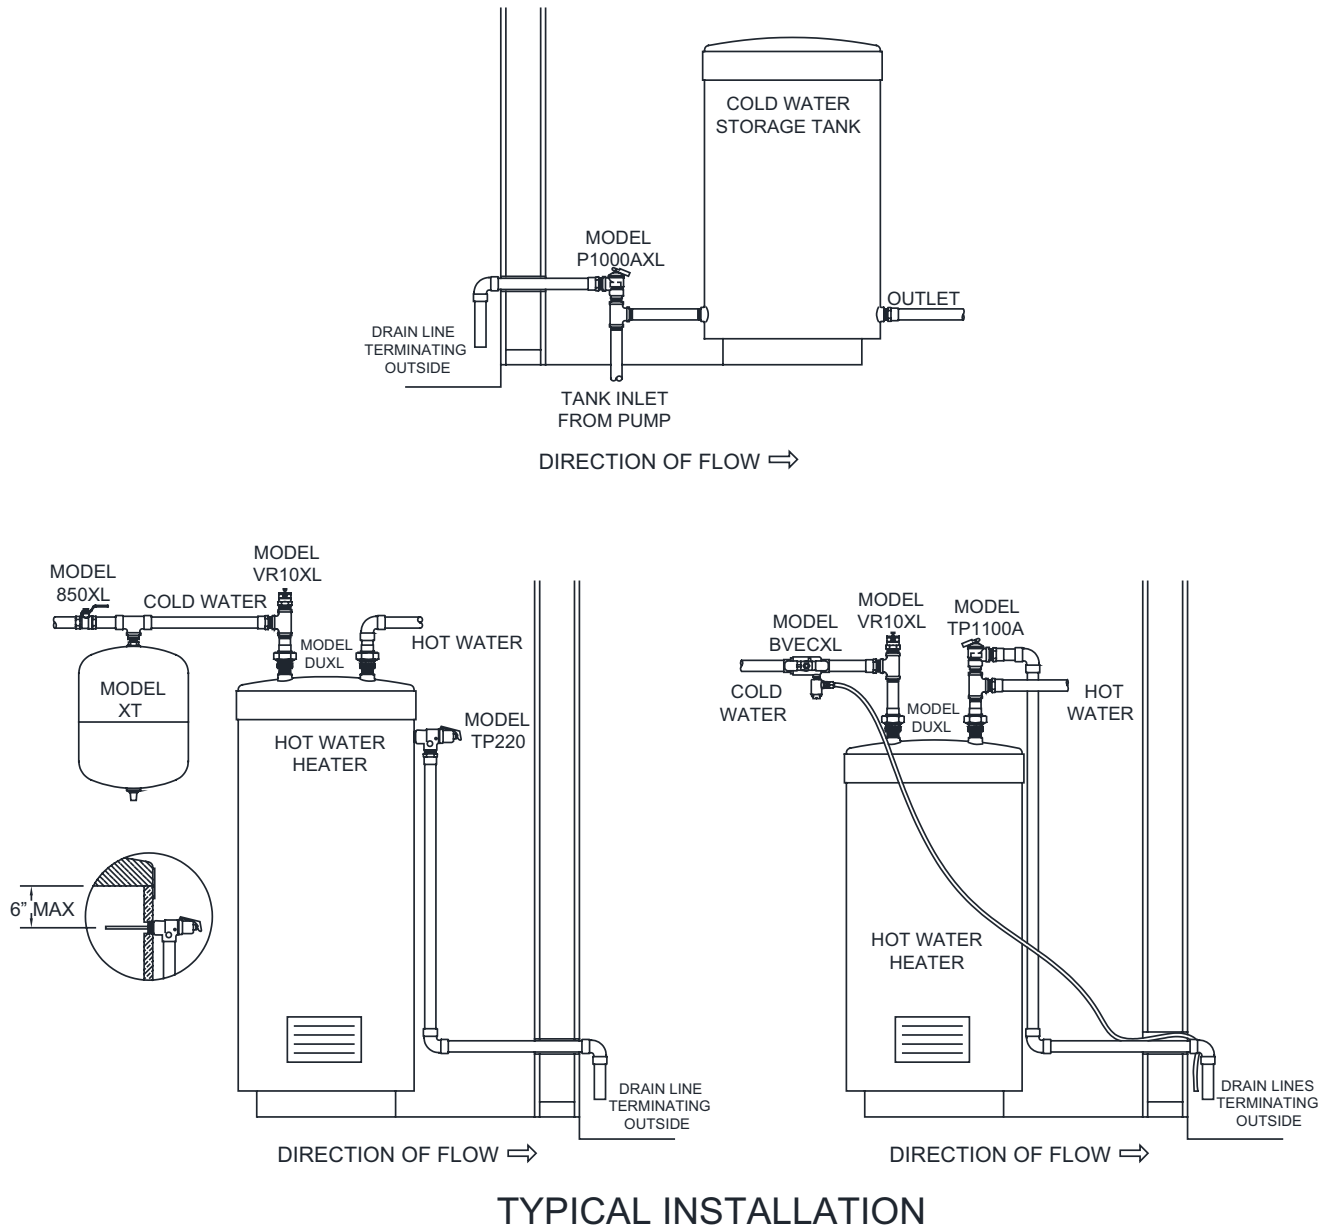

Specifications

The Relief Valve shall meet the requirements of the ASME Boiler and Pressure Vessel Code (Section IV) and shall be CSA Design Certified (ANSI Z21.22/CSA 4.4). Where pressure only relief is required, the assembly shall be a ZURN WILKINS Model P1000AXL. Where temperature and pressure relief is required, the assembly shall be a ZURN WILKINS Model TP1100A, TP220 or TP3000.