
TAG:	

Single Lever Faucet

Architect/Engineering Specifications:

Deck mount single lever faucet with polished chrome plated brass body with integral spout, polished chrome plated deck plate, 0.5 GPM vandal resistant non-aerated spray device, ceramic cartridge with adjustable temperature limit stop, single lever handle and 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements

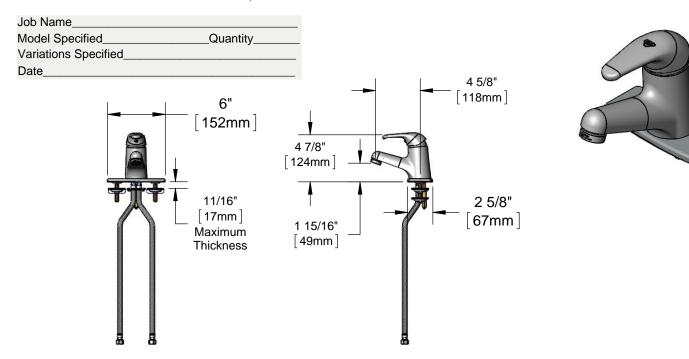


Features & Benefits:

- Deck mount single lever faucet w/ polished chrome plated brass body w/ integral spout
- Polished chrome plated brass 6" deck plate (fits 4" hole centers)
- 0.5 GPM vandal resistant non-aerated spray device, Series 9 (B-0199-09-N05)
- Single lever handle w/ color coded index
- Ceramic cartridge w/ adjustable temperature limit stop
- 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections
- Material: Polished chrome plated brass body & deck plate, chrome plated metal handle and stainless steel hoses

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



Ceramic Cartridge: Two Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40°F - 140°F
Flow Rate: 0.50 GPM @ 60 psi

ADA Compliant

Optional Outlets (Series 4 / VR Series 9)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035
0.5	N/A	□ B-0199-04-N05	N/A	Standard
1.0	N/A	N/A	N/A	□ B-0199-09-LF-10
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF-15
22	□ B-0199-04	□ B-0199-25	□ B-0199-09	□ B-0199-27









