




6540.177 Shown

MODEL NUMBER:

- 6540.177 Widespread Lavatory**
 0.5 gpm Pressure compensating multi-laminar spray. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-resistant wrist blade handles. LESS drain and pop-up hole.
- 6540.178 Widespread Lavatory**
 1.5 gpm Pressure compensating aerator. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-resistant wrist blade handles. LESS drain and pop-up hole.

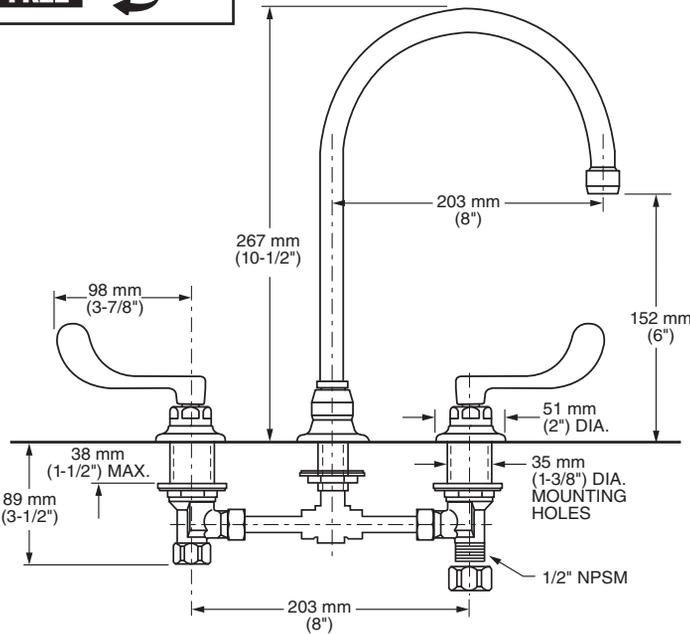

GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-Resistant Wrist Blade handles with blue & red color indexes.

PRODUCT FEATURES:

- Pressure Compensating Outlets:** Provides a constant water flow throughout the pressure range.
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.
- Field-Convertible Rigid/Swivel Spout:** Easily converted in the field.
- Lead Free:** Faucet contains $\leq 0.25\%$ total lead content by weighted average.


SUGGESTED SPECIFICATION

Two-handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving pressure compensating flow outlets. Vandal-Resistant wrist blade handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature convertible rigid/swivel spout with 8" reach. Fitting shall be American Standard Model # 6540.17_.002.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF 61/Section 9 and Annex G**

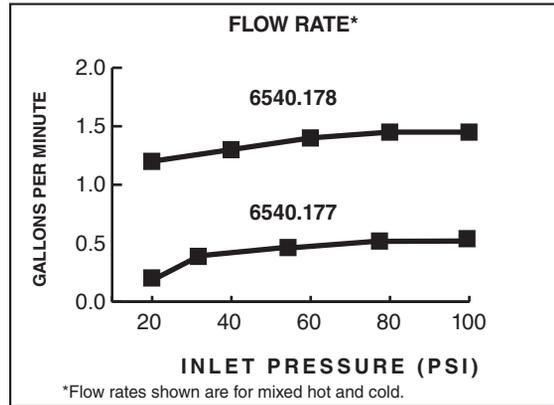

Product Number	Description	Finish
		Polished Chrome
		002
6540.177	Widespread lavatory faucet with field-convertible gooseneck spout with 8" reach. 0.5 gpm/1.9 L/min pressure compensating multi-laminar spray. Vandal-resistant wrist blade handles. LESS drain & pop-up hole.	
6540.178	Widespread lavatory faucet with field-convertible gooseneck spout with 8" reach. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-resistant wrist blade handles. LESS drain and pop-up hole.	

ADA Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for accessible and usable building facilities - check local codes

Other Aerators Available:

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
V035*	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Non-Aerated Spray

PCA - Pressure Compensating
 *Meets Cal Green Code