


TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET
RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH



6540.170 Shown

MODEL NUMBER:*

- ❑ **6540.170 Widespread Lavatory**
1.5 gpm Pressure Compensating Aerator. Convertible rigid/swivel gooseneck spout. Vandal-Resistant Wrist Blade Handles. LESS drain and pop-up hole.
- ❑ **6540.140 Widespread Lavatory**
1.5 gpm Pressure Compensating Aerator. Convertible rigid/swivel gooseneck spout. Vandal-Resistant Lever Handles. LESS drain and pop-up hole.

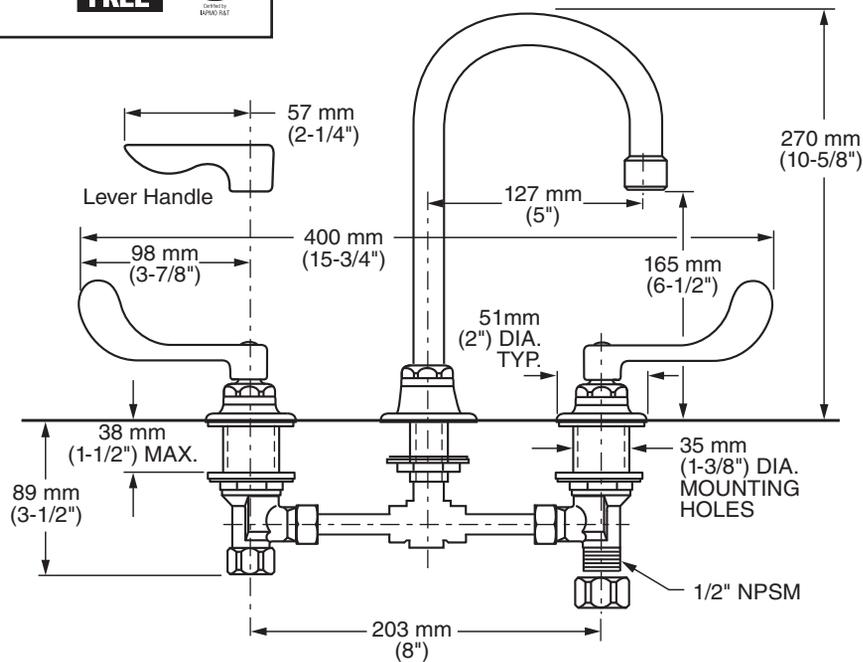

GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout. Choice of Vandal-Resistant Lever or Wrist Blade handles with blue & red color indexes. 1.5 gpm/5.7 L/min. maximum flow rate.

PRODUCT FEATURES:

- Pressure Compensating Multi-Laminar Spray:** Provides a constant water flow of 1.5 gpm throughout the pressure range.
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.
- Field-Convertible Rigid/Swivel Spout:** Easily converted in the field.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION

Two-handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving 1.5 gpm/5.7 L/min. pressure compensating aerator. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature convertible rigid/swivel spout. Fitting shall be American Standard Model # 654_...002.




MONTERREY®
TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET
RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF 372**

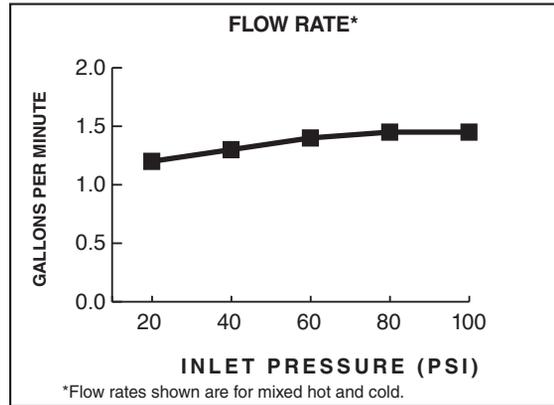

Product Number	Description	Finish
		Polished Chrome
		002
6540.170	Widespread Lavatory with convertible rigid/swivel gooseneck spout. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. LESS drain and pop-up hole.	
6540.140	Widespread Lavatory with convertible rigid/swivel gooseneck spout. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-Resistant Lever Handles. LESS drain and pop-up hole.	

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for accessible and usable building facilities - check local codes

Other Aerators Available:	
Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
V05*	0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Multi-Laminar Spray
V035*	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Non-Aerated Spray

PCA - Pressure Compensating
 *Meets Cal Green Code

PART OF LIXIL