




MODEL NUMBER:

- 4285.051 Kitchen Faucet with Side Spray
- 4285.051.F15 Kitchen Faucet with Side Spray

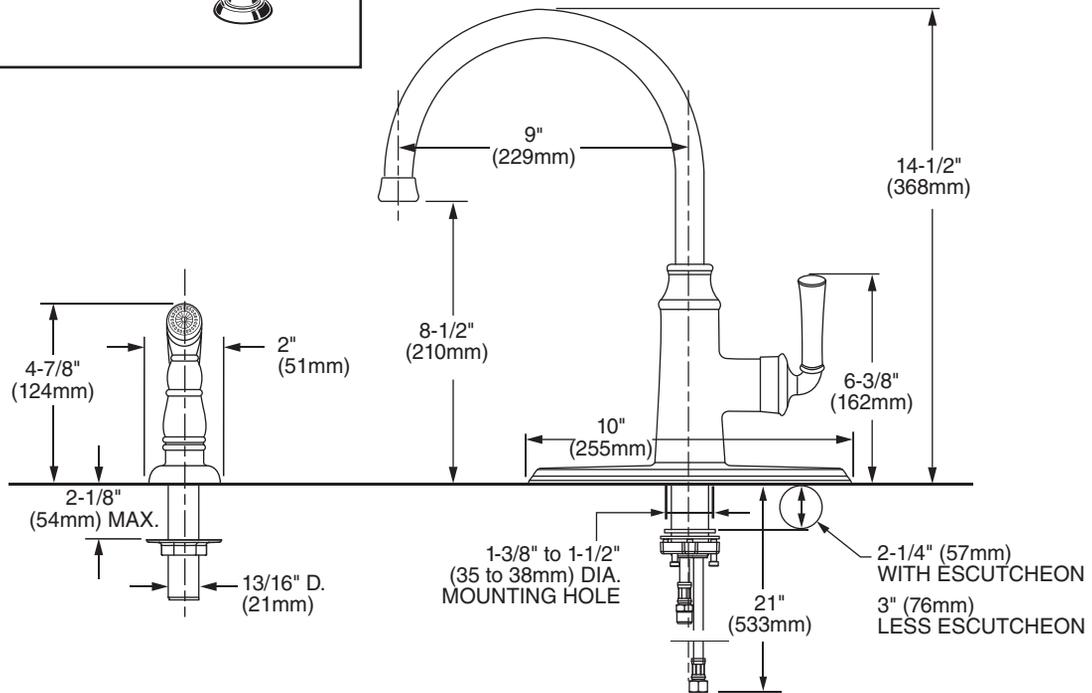

GENERAL DESCRIPTION:

Brass swivel spout and metal body, with metal lever handle. Washerless 35mm ceramic disc valve cartridge. Brass mounting shank with brass fixation ring. Braided flexible supply hoses with 3/8" compression connectors. 2.2 gpm/8.3 L/min. maximum flow rate, 1.5 gpm/5.7 L/min, maximum flow rate for F15 models.

PRODUCT FEATURES:

- Ceramic Disc Valve Cartridge:** Assures smooth, precise valve control and a lifetime of drip-free, maintenance free performance.
- Brass Construction:** Highest quality faucet materials for durability & long life.
- Memory Position Valving:** Allows user to turn valve on and off at preferred temperature setting without readjusting handle position each time.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average
- Choice of Finishes:** Lifetime finishes won't tarnish or scratch.


SUGGESTED SPECIFICATION:

Single control kitchen faucet shall feature a metal body, brass swivel spout and metal lever handle. Shall also feature washerless ceramic disc valve cartridge, flexible supply hoses. Fitting shall be American Standard Model # 4285.051.____.____.


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- NSF 61/Section 9 & Annex G**
- CSA B125**

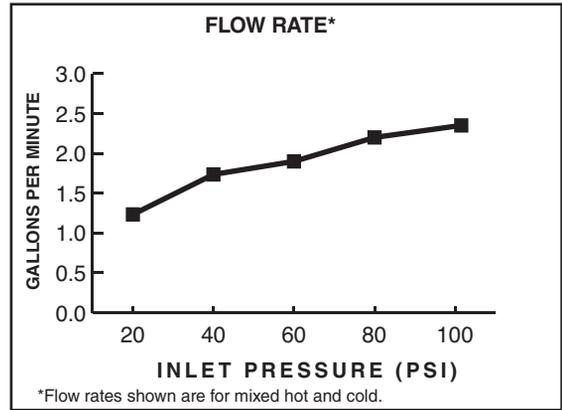

2.2 gpm/8.3 L/min. FLOW RATE

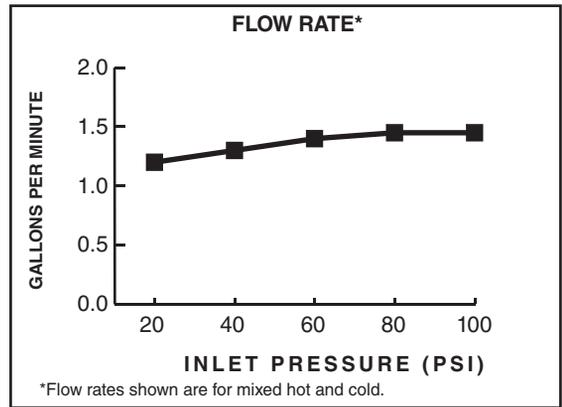

1.5 gpm/5.7 L/min. FLOW RATE

Product Number	Description	Finish Options		
		Polished Chrome	PVD Stainless Steel	Oil Rubbed Bronze
		002	075	224
4285.051	Single Control Kitchen Faucet with Side Spray - 2.2 gpm/8.3 L/min. maximum flow rate			
4285.051.F15	Single Control Kitchen Faucet with Side Spray - 1.5 gpm/5.7 L/min. maximum flow rate			

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.