

**ACCESSPRO™ RIGHT HEIGHT®
ELONGATED TOILET WITH SEAT**

- 215AG.107RS**
 - Combination bowl and tank with seat
 - **Allows up to 3-1/2" (89mm) of lateral adjustment of toilet to the right**
 - Vitreous china
 - High Efficiency Toilet (HET), ultra-low consumption (4.8 Lpf/1.28 gpf), utilizes 20% less water
 - 1,000g MaP Score** at 1.28gpf
 - Meets EPA WaterSense® criteria
 - PowerWash® rim scrubs bowl with each flush
 - Robust metal trip lever & metal shank fill valve
 - Includes adjustable trapway kit
 - EverClean® surface included
 - 3" flush valve
 - 2-1/8" trapway
 - 16-1/2" rim height for accessible applications
 - 12" (305mm) rough-in
 - Generous 9" x 8" water surface area
 - Chrome finish trip lever is supplied
 - Slow Close seat included
 - 5 year warranty



215AG.107RS SHOWN

- 215AG.107LS** Same as above except with **lateral adjustment to the left**
- 215AG.108RS** Same as 215AG.107RS except with 4188A.108 Tank
- 215AG.108LS** Same as 215AG.107LS except with 4188A.108 Tank

- 3517AG.100RS** Move Right Elongated Bowl
- 3517AG.100LS** Move Left Elongated Bowl
- 4188A.107** Tank
- 4188A.108** Tank with trip lever located on right side

SEE FOLLOWING PAGES FOR ROUGHING-IN DIMENSIONS

Nominal Dimensions:

768 x 441 x 771mm (30-1/4" x 17-3/8" x 30-3/8")

Fixture with seat, supply sold separately

To Be Specified:

- Color: White
- Supply with stop:

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs





MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

** Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Veritec Consulting, Inc. and Koeller and Company.



215AG.107RS

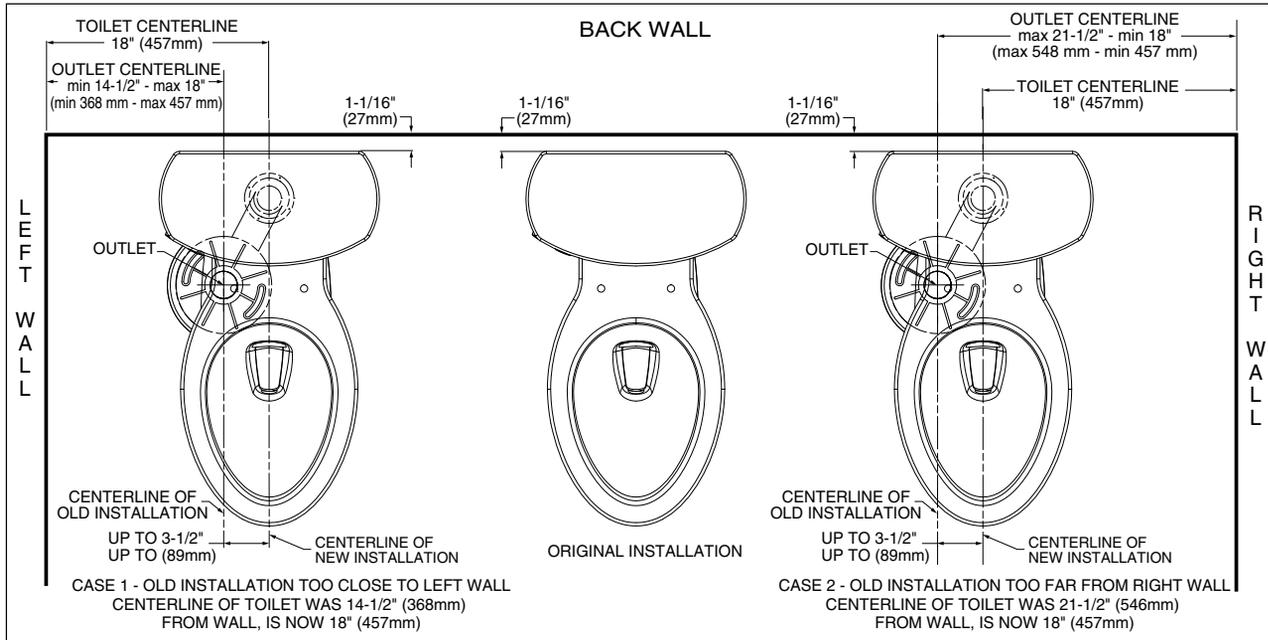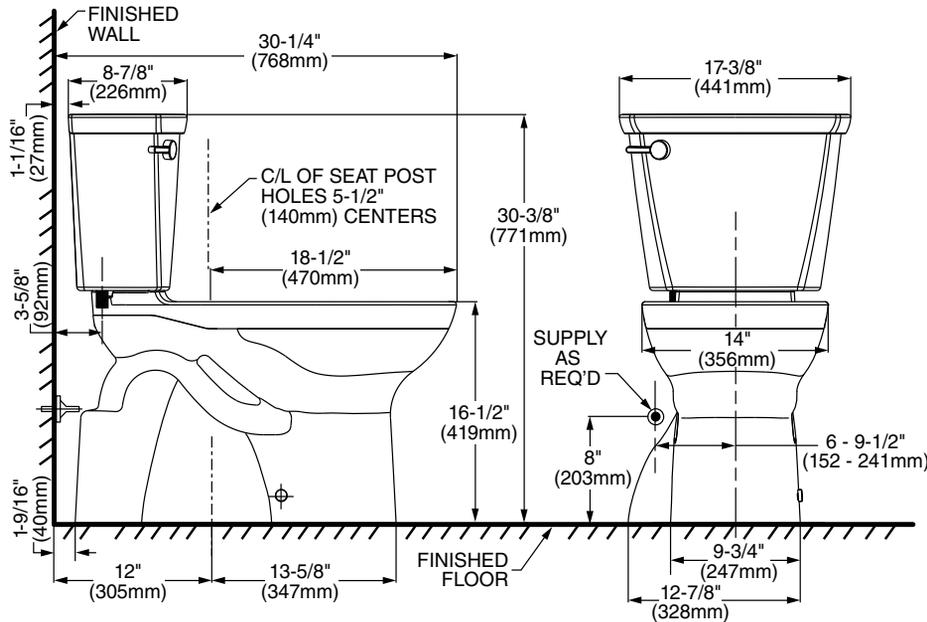



215AG.107RS MOVES TOILET LOCATION TO RIGHT

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305mm (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

215AG.107LS

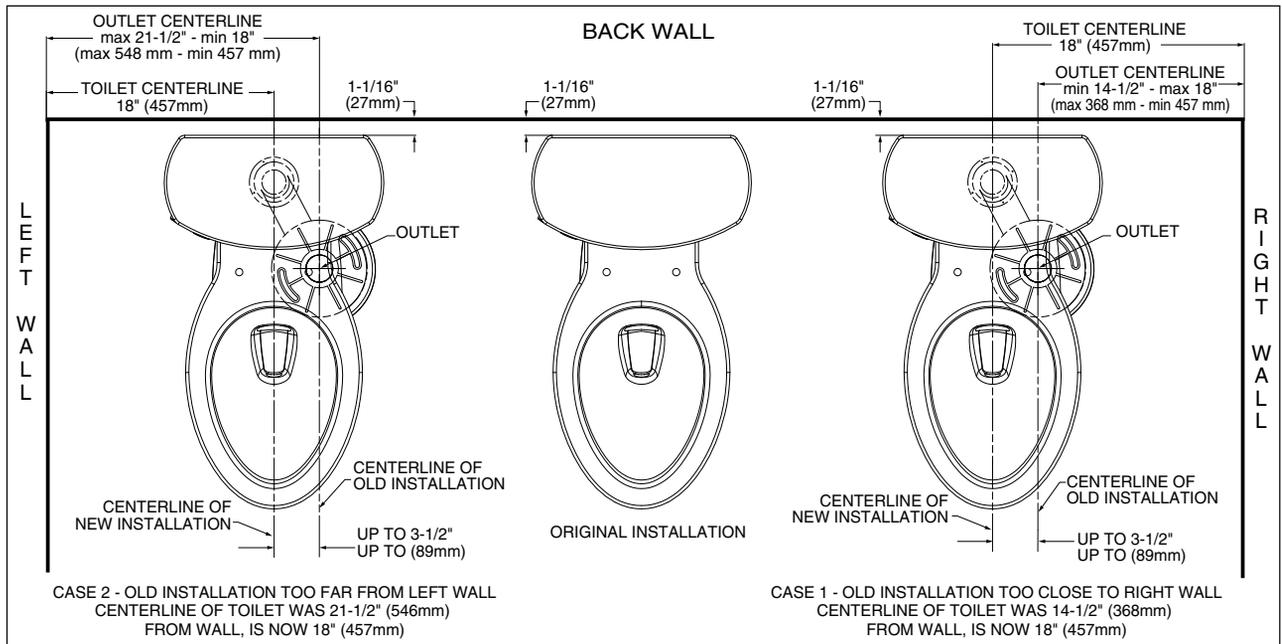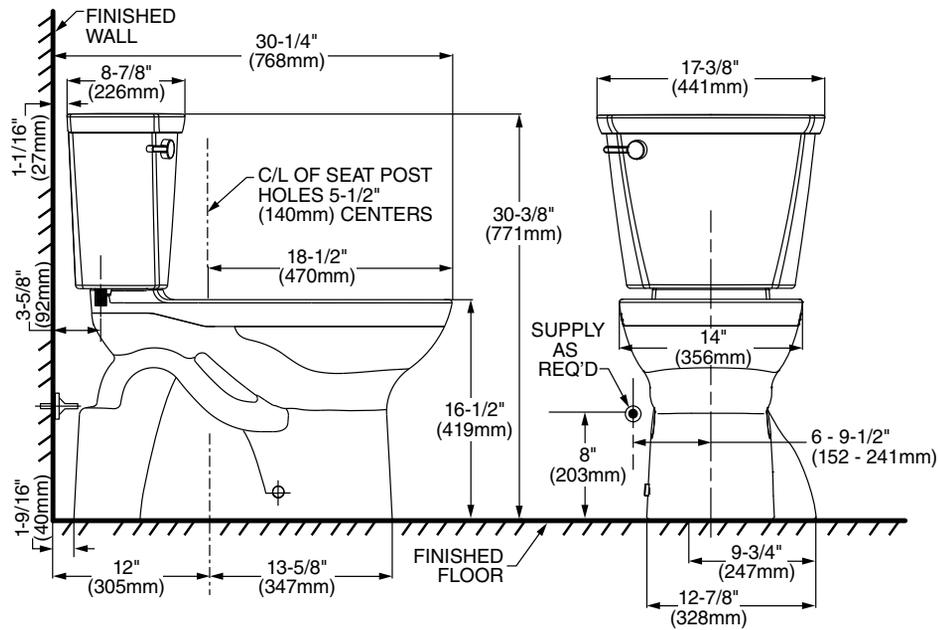

215AG.107LS MOVES TOILET LOCATION TO LEFT

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305mm (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.