




7500.178 Shown



MODEL NUMBER:

- 7500.177 Centerset Lavatory**
 0.5 gpm Pressure compensating vandal-resistant multi-laminar spray. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-resistant wrist blade handles. Less drain and pop-up hole.
- 7500.178 Centerset Lavatory**
 1.5 gpm Pressure compensating aerator. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-resistant wrist blade handles. Less drain and pop-up hole.

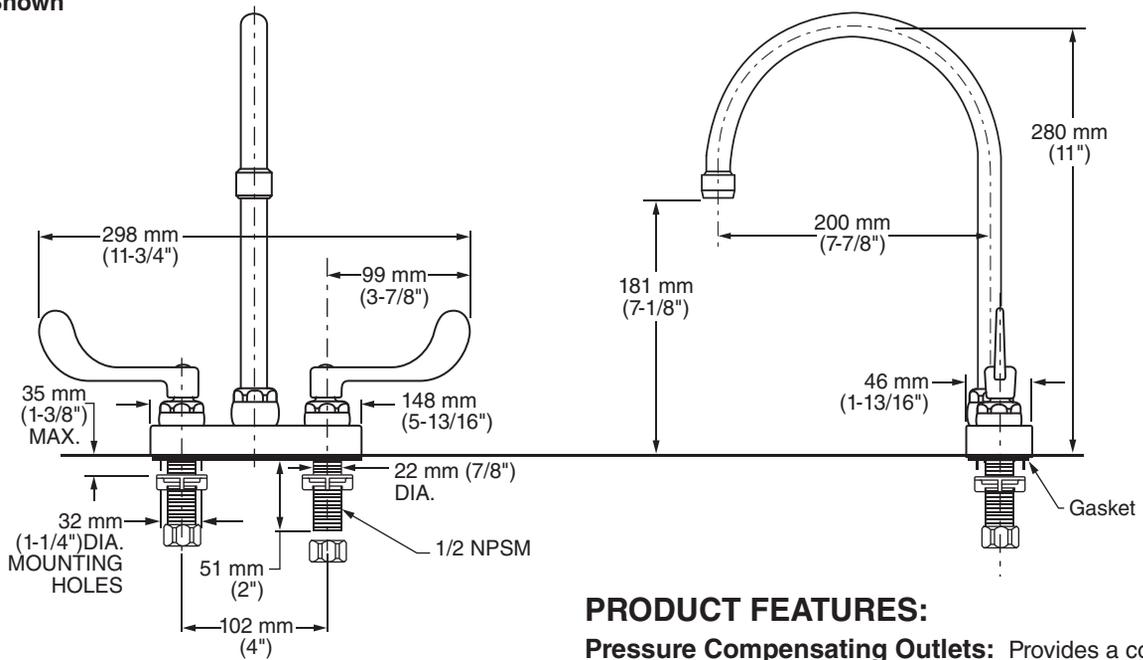

GENERAL DESCRIPTION:

Durable cast brass construction. 1/2" male threaded inlet shanks with shank nuts brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-Resistant Wrist Blade handles with blue & red color indexes.

PRODUCT FEATURES:

- Pressure Compensating Outlets:** Provides a constant water flow throughout the pressure range.
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.
- Field-Convertible Rigid/Swivel Spout with 8" Reach:** Easily converted in the field.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION:

Two handle center-set lavatory faucet shall feature cast brass construction with shank nuts and brass coupling nuts. Shall feature water-conserving pressure compensating flow outlets. Vandal-Resistant wrist blade handles. 1/4 turn washerless ceramic disc valve cartridges. Shall also feature field-convertible rigid/swivel spout with 8" reach. Fitting shall be American Standard Model # 7500.17_.002.




MONTERREY®
TWO-HANDLE CENTERSET LAVATORY FAUCET
RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1
- CSA B 125
- NSF 372

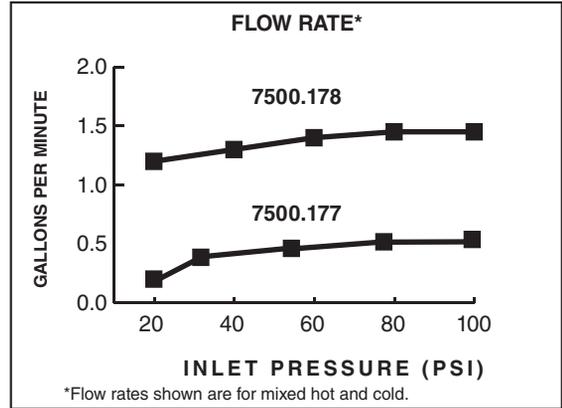

Product Number	Description	Finish
		Polished Chrome
		002
7500.177	Centerset lavatory faucet with field-convertible gooseneck spout with 8" reach. 0.5 gpm/1.9 L/min pressure compensating multi-laminar spray. Vandal-resistant wrist blade handles. Less drain & pop-up hole.	
7500.178	Centerset lavatory faucet with field-convertible gooseneck spout with 8" reach. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-resistant wrist blade handles. Grid strainer drain.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V15	.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator
LV10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator
V035**	0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Multi-Laminar Spray

*PCA - Pressure Compensating

**Meets Cal Green Code