

# TEMPEST II wall

Designed with professional-grade performance and seamless contours, the wall-mount Tempest II gives you serious cooking power, with 650-CFM or 1200-CFM blower options. Equipped with dishwasher-safe, high-airflow baffle filters, an optional wireless remote control, 6-speeds, and dual-level halogen lighting, it's everything the demanding cook could ask for.


|  | INTERNAL BLOWER STANDARD | ACT™ INTERNAL BLOWER with AIRFLOW CONTROL TECHNOLOGY™ |                          |
|--|--------------------------|---|--------------------------|
| Single Blower (Included),<br>Min.-Max. CFM   | 200 - 650                | Min.-Max. CFM   | 200 - 390      200 - 290 |
| Single Blower (Included),<br>Min.-Max. Sones | 1 - 6                    | Min.-Max. Sones                                       | 1 - 4      1 - 3         |
| Dual Blower (Optional),<br>Min.-Max. CFM     | 400 - 1,200              |   |                          |
| Dual Blower (Optional),<br>Min.-Max. Sones   | 2 - 9                    |   |                          |

*ACT™ is a feature built into Tempest II hoods with single internal blowers allowing you to limit the maximum blower CFM to meet local code requirements.*




Optional Remote Control


|                                       |                             |
|---------------------------------------|-----------------------------|
| <b>SIZE</b>                           |                             |
| AK7500BS                              | 30"                         |
| AK7536BS                              | 36"                         |
| AK7548BS                              | 48"                         |
| <b>PERFORMANCE</b>                    |                             |
| (INCLUDED) SINGLE INTERNAL BLOWER CFM | 200 - 650                   |
| MIN.-MAX. SONES                       | 1 - 6                       |
| (OPTIONAL) DUAL INTERNAL BLOWER CFM   | 400 - 1,200                 |
| MIN.-MAX. SONES                       | 2 - 9                       |
| <b>COLOR</b>                          |                             |
| STAINLESS STEEL                       | SS                          |
| <b>FEATURES</b>                       |                             |
| CONTROLS                              | Electronic Touch            |
| SPEED LEVELS                          | 6*                          |
| AUTO DELAY-OFF                        | Yes                         |
| CLEAN AIR MODE                        | Yes                         |
| LIGHTING                              |                             |
| AK7500BS/AK7536BS                     | Halogen, 35W x 2            |
| AK7548BS                              | Halogen, 35W x 4            |
| DUAL LEVEL LIGHTING                   | Yes                         |
| FILTERS                               |                             |
| AK7500BS                              | SS Pro-Baffle x 2           |
| AK7536BS                              | SS Pro-Baffle x 3           |
| AK7548BS                              | SS Pro-Baffle x 4           |
| WIRELESS REMOTE CONTROL OPTION        | Yes                         |
| DUAL INTERNAL BLOWER OPTION           | Yes                         |
| RECIRCULATING OPTION**                |                             |
| AK7500BS/AK7536BS                     | Yes, Single Blower Only     |
| AK7548BS                              | NA                          |
| <b>DUCT SPECIFICATIONS</b>            |                             |
| SINGLE INTERNAL BLOWER - VERTICAL     | 8" Round                    |
| SINGLE INTERNAL BLOWER - HORIZONTAL†  | 3-1/4" x 10" or 8" Round    |
| DUAL INTERNAL BLOWER - VERTICAL       | 10" Round                   |
| DUAL INTERNAL BLOWER - HORIZONTAL     | 10" Round                   |
| <b>AC POWER</b>                       |                             |
| SINGLE INTERNAL BLOWER                |                             |
| AK7500BS/AK7536BS                     | 120V, 60Hz at Max. 4A       |
| AK7548BS                              | 120V, 60Hz at Max. 4.6A     |
| DUAL INTERNAL BLOWER                  |                             |
| AK7500BS/AK7536BS                     | 120V, 60Hz at Max. 7.4A     |
| AK7548BS                              | 120V, 60Hz at Max. 8A       |
| <b>OPTIONAL ACCESSORIES</b>           |                             |
| 12" DUCT COVER                        |                             |
| AK7500BS                              | AK0720                      |
| AK7536BS                              | AK0726                      |
| AK7548BS                              | AK0728                      |
| WIRELESS REMOTE CONTROL               | 14000005                    |
| DUAL INTERNAL BLOWER KIT              | PBD-1200A                   |
| RECIRCULATING KIT**                   |                             |
| AK7500BS                              | ZRC-7000B                   |
| AK7536BS                              | ZRC-7036B                   |
| AK7548BS                              | NA                          |
| BACKSPLASH WITH SHELVES               |                             |
| AK7500BS                              | AK0710                      |
| AK7536BS                              | AK0716                      |
| AK7548BS                              | AK0712                      |
| MAKE-UP AIR KIT, SINGLE BLOWER        | MUA008A                     |
| MAKE-UP AIR KIT, DUAL BLOWER          | MUA010A                     |
| <b>MOUNTING HEIGHT**</b>              |                             |
|                                       | 26" - 36"                   |
| <b>WARRANTY</b>                       |                             |
|                                       | 3 Years Parts, 1 Year Labor |

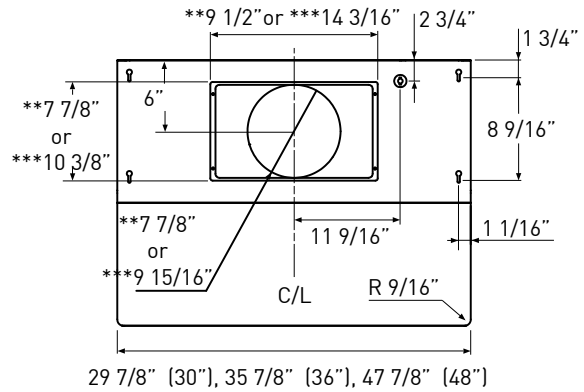

TOP

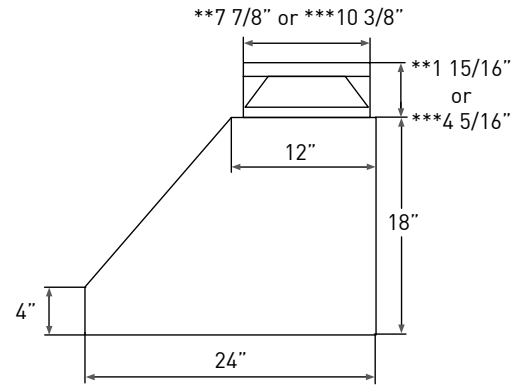

SIDE

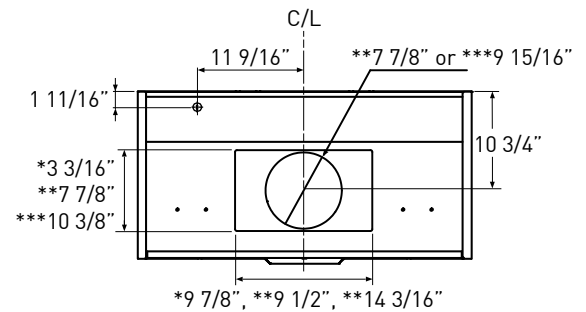

BACK

\* Single Blower Rect. Ducting Dimension  
\*\* Single Blower Round Ducting Dimension  
\*\*\* Dual Blower Dimension

Specifications subject to change, check zephyronline.com for up-to-date information.

\*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

\*\*Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

†If horizontally ducting via 3-1/4" x 10", the maximum airflow of 650 CFM will be reduced to 550 CFM.

\*\*Mounting height refers to distance between top of cooking surface and bottom of hood.