

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE — Replaces up to 50W quartz halogen. Provides general illumination for outdoorspaces in residential and light commercial applications. Ideal for landscape or accent lighting.

CONSTRUCTION — Rugged cast-aluminum, corrosion-resistant rear housing and lamp heads thermally isolate the LEDs and driver promoting long life.

The adjustable head allows for tool-free directional aiming. Includes a 3' cord and plug.

OPTICS — High-performance LEDs produce 674 lumens and maintain 70% of light output at 50,000 hours of service. (LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.)

The tempered glass lens seals out the elements and protects the LEDs.

4000 K CCT

See Lighting Facts Label for specific fixture performance.

ELECTRICAL — Dusk-to-dawn photocell automatically turns light on at dusk and off at dawn for convenience and energy savings.

120V driver operates at 60Hz, 9.0 watts.

Operating temperature -30°C to 40°C.

INSTALLATION — Designed for ground-mounting with stake installed and wall-mounting with stake removed.

All mounting hardware included.

LISTINGS — UL/C-UL certified to US and Canadian safety standards. Wet location listed.

Tested in accordance with IESNA LM-79 and LM-80 standards.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.

Outdoor General Purpose

Portable Spotlight



ORDERING INFORMATION


For shortest lead times, configure product using **bolded options**.

Example: OSTLLED 120 P BL

Series	Color temperature (CCT) ¹	Voltage	Controls	Finish
OSTLLED	(blank) 4000 K	120 120V	P Dusk-to-dawn photocell	BL Black

Notes

¹ Nominal correlated color temperature (CCT) per ANSI C78.377-2008.

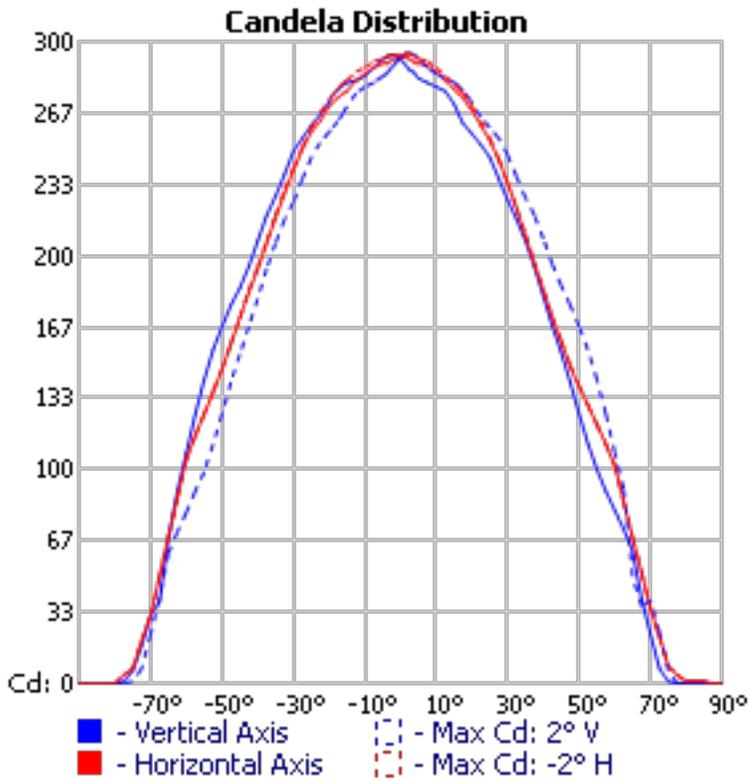

lighting facts[®]

A Program of the U.S. DOE

Lithonia Lighting

Light Output (Lumens)	674
Watts	9.01
Lumens per Watt (Efficacy)	74

Color Accuracy	83
Color Rendering Index (CRI)	

Light Color
Correlated Color Temperature (CCT) **4071 (Bright White)**

2700K
3000K
4500K
6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-VK2UN2 (2/5/2014)
Model Number: OSTLLED 120 P BL
Type: Luminaire - Path/Step/Rail