

Portrait Comfort Height 1.28 gpf Toilet with AquaPiston[®] flush technology K-3826

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Concealed trapway facilitates easy cleaning and enhances design.
- Comfort Height[®] feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- Glenbury[™] Quiet-Close[™] seat with Quick-Release[™] functionality allows seat to close quietly and quickly unlatch from the toilet for easy removal and convenient cleaning.
- 2-1/8-inch glazed trapway.
- 1.28 gallons per flush (gpf).
- Includes Polished Chrome lift knob.
- Supply line not included.
- Coordinates with other products in the Portrait collection.

Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- AquaPiston canister allows water to flow into the bowl from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3: 2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3-inch flapper, for leak-free performance.
- Light-touch canister flush requires a lower actuation force than a flapper.

Installation

• Standard 12-inch rough-in.

Optional Accessories

K-7677

Components

Additional included component/s: Tank valves, Aqua Piston® valves, Low profile bolt caps, Top-mount lift trip lever, and Seat.





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color Code Description

-) 0 White
- 96 Biscuit
- 47 Almond
- NY Dune
- 95 Ice™ Grey
- G9 Sandbar
- - K4 Cashmere
 - 58 Thunder™ Grey
 - 7 Black Black™





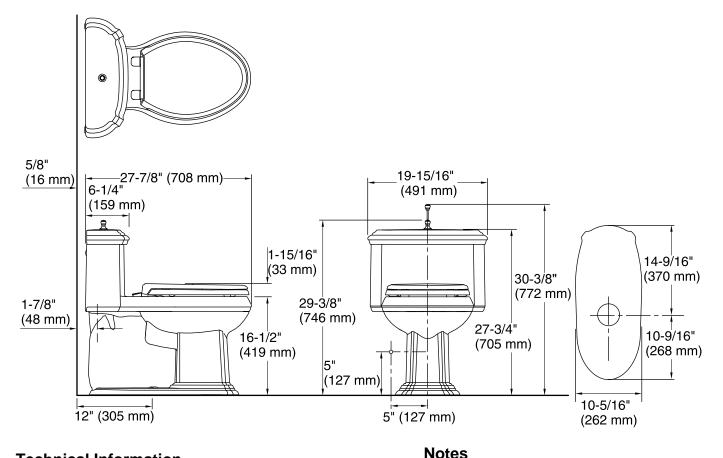

Technical Information

s are nominal.
One-piece
Elongated front
AquaPiston
Quick-Release [™]
2-1/8" (54 mm)
1.28 gpf (4.8 lpf)
10-3/4" x 6-3/4" (273 mm x 171 mm)
6" (152 mm)
12" (305 mm)
5-1/2" (140 mm)

Install this product according to the installation guide.

Fixture Supply Requirements

Min static pressure:	20 psi (137.9 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flow rate:	0.5 gpm (1.9 lpm)

