


Copper-Flex™ Water Heater Connectors
Patented Resistance Against Galvanic Corrosion



- Patented Internal Dielectric Sleeve**
Effectively separates dissimilar metals within the waterway to prevent galvanic corrosion.
- No Dielectric Union Needed**
Dielectric sleeve eliminates the need for a dielectric union (plastic lined nipple).
- Less Torque to Seal**
Rubber washer is more resilient than PEX and easier to install on rough nipple surfaces.
- Longer Connector Nuts**
A greater number of thread-to-thread contact provides a better seal to lined nipples.
- Available for PEX connections**

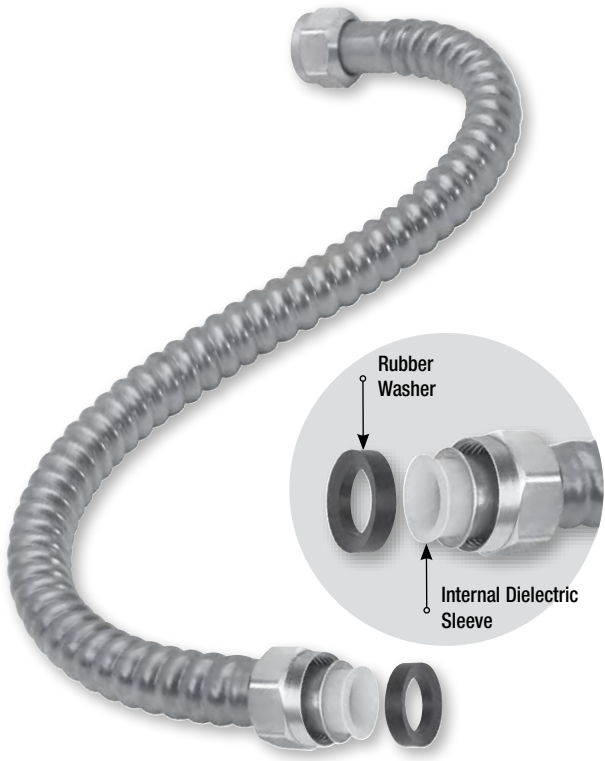

	PART NO.	UPC	DESCRIPTION	LENGTH	QTY	LBS
	7/8" OD Tube - FIP X FIP					
	WB00-12N	026613089287	3/4" FIP x 3/4" FIP	12"	25	9.7
	WB00-15N	026613089300	3/4" FIP x 3/4" FIP	15"	25	11.9
	WB00-18N	026613089331	3/4" FIP x 3/4" FIP	18"	25	13.1
	WB00-24N	026613089348	3/4" FIP x 3/4" FIP	24"	25	16.5
	WB10-18N	026613131504	1" FIP x 3/4" FIP	18"	25	17.1
	7/8" OD Tube - FIP x Male Sweat					
	WB03-12N	026613089362	3/4" FIP x 3/4" Nom Male Sweat (7/8" OD)	12"	25	8.1
	WB03-15N	026613089379	3/4" FIP x 3/4" Nom Male Sweat (7/8" OD)	15"	25	10.3
	WB03-18N	026613089386	3/4" FIP x 3/4" Nom Male Sweat (7/8" OD)	18"	25	11.5
	WB03-24N	026613089393	3/4" FIP x 3/4" Nom Male Sweat (7/8" OD)	24"	25	14.9
	7/8" OD Tube - FIP x Male/Female Sweat					
	WB034-12N	026613089409	3/4" FIP x 3/4" Nom Male/Female Sweat (7/8" ID)	12"	25	8.1
	WB034-15N	026613089416	3/4" FIP x 3/4" Nom Male/Female Sweat (7/8" ID)	15"	25	10.3
	WB034-18N	026613089423	3/4" FIP x 3/4" Nom Male/Female Sweat (7/8" ID)	18"	25	11.5
	WB034-24N	026613093710	3/4" FIP x 3/4" Nom Male/Female Sweat (7/8" ID)	24"	25	14.9
	WB134-18N	026613110608	1" FIP x 3/4" Nom Male/Female Sweat (7/8" ID)	18"	25	15.5
	WB134-24N	026613110615	1" FIP x 3/4" Nom Male/Female Sweat (7/8" ID)	24"	25	19.2

WARNING: For use with water in accessible locations only. DO NOT use with gas – gas will cause corrosion and leakage.