

SL, BR, GR & EV SERIES
SINGLE/MULTI-FAMILY ERV CATALOG

JANUARY 2019
RENEWAIRE.COM | 800.627.4499

BECAUSE INDOOR AIR QUALITY MATTERS

As buildings become more airtight due to better construction methodologies, the need for increased and balanced ventilation is critical. Without it, internally generated contaminants accumulate and cause **deficient indoor air quality (IAQ)**, which leads to significant health and cognitive problems for occupants. Industry standards are changing to combat deficient IAQ, and codes that adopt these new standards are driving the

application of ERV technologies. Deficient IAQ is a serious problem, especially considering:

- ◆ On average, Americans spend 90% of their time indoors
- ◆ The EPA found that indoor air may be 2-5 times—and occasionally greater than 100 times—more polluted than outdoor air
- ◆ The EPA ranks indoor air pollutants as a top-five environmental health risk to occupants



ADVERSE EFFECTS OF **DEFICIENT IAQ**

Deficient IAQ has numerous adverse effects on the health and cognitive function of building occupants.



Health problems: Acute allergies, headaches, coughs, asthma, skin irritations and breathing difficulties, as well as chronic illnesses such as cancer, liver disease, kidney damage and nervous-system failure.



Cognitive impairment: Studies by the Harvard School of Public Health and the Lawrence Berkeley National Laboratory found that carbon dioxide (CO₂)—an indoor air contaminant—negatively impacted thinking and decision-making at levels commonly found inside homes and buildings.

ABOUT RENEWAIRE

For over 30 years, **RenewAire has been a pioneer in enhancing IAQ** in commercial and residential buildings of every size. This is achieved while maximizing sustainability through our fifth-generation, enthalpic-core, static-plate Energy Recovery Ventilators (ERVs) that **optimize energy efficiency**, lower capital costs via **HVAC load reduction** and **decrease operational expenses** by minimizing equipment needs, resulting in significant energy savings. Our ERVs are competitively priced, simple to install, easy to use and maintain, have a quick payback and enjoy the industry's best warranty with the lowest claims due to long-term reliability. In 2010, RenewAire joined the Soler & Palau (S&P) Ventilation Group, providing direct access to the latest in energy-efficient air-moving technologies. For more information, visit: renewaire.com.

TABLE OF CONTENTS

ABOUT RENEWAIRE	2-3
SPECIFICATIONS & DIMENSIONS	4-17
OPTIONS & ACCESSORIES	18-23
CERTIFICATIONS & PERFORMANCE	24-25
ORDERING & SUPPORT	26-28

SL SERIES - Unitary ERV

MODEL	TYPE	CFM RANGE	PAGE
SL70H - STANDARD	Consumer-Grade, Four-Duct Connection	51-76 CFM*	4-5
SL70L - STANDARD	Consumer-Grade, Four-Duct Connection	51-76 CFM*	6-7

*Continuous mode range

BR SERIES - Unitary (Two Duct) ERV

MODEL	TYPE	CFM RANGE	PAGE
BR70 - STANDARD	Two-Duct Connection	40-70 CFM	8
BR130 - STANDARD	Two-Duct Connection	50-140 CFM	9

GR SERIES - Unitary ERV

MODEL	TYPE	CFM RANGE	PAGE
GR90 - STANDARD	Contractor-Grade, Four-Duct Connection	40-110 CFM	10

EV SERIES - Unitary ERV

MODEL	TYPE	CFM RANGE	PAGE
EV90 - STANDARD	Consumer-Grade, Four-Duct Connection	40-110 CFM	11
EV90P - STANDARD	Consumer-Grade, Four-Duct Connection	40-110 CFM	12
EV130 - STANDARD	Consumer-Grade, Four-Duct Connection	50-140 CFM	13
EV200 - STANDARD	Consumer-Grade, Four-Duct Connection	100-200 CFM	14
EV240 - STANDARD	Consumer-Grade, Four-Duct Connection	100-240 CFM	15
EV300 - STANDARD	Consumer-Grade, Four-Duct Connection	150-300 CFM	16




RENEWAIRE ERVs ACHIEVE SUSTAINABLE IAQ

RenewAire is a **pioneer in enhancing IAQ** while maximizing sustainability through enthalpic-core, static-plate Energy Recovery Ventilators (ERVs) that **optimize energy efficiency, lower costs by reducing HVAC loads and therefore reduce environmental footprints**. Our ERV technology preconditions incoming air with the otherwise-wasted energy (heat and humidity) of the exhaust air going out—all while the airstreams are kept physically separate as certified by the Air Conditioning, Heating and Refrigeration Institute (AHRI) for zero exhaust air transfer at normal balanced operating conditions. As the pioneer of static-plate core technology in North America, RenewAire is the largest ERV producer in the USA.


OPTIMIZING ENERGY EFFICIENCY

Energy efficiency is optimized by preconditioning the outside air coming in with the **otherwise-wasted heat and humidity** of the exhaust air going out. This exchange of energy moderates temperatures and moisture, decreases HVAC equipment needs, drives operational efficiencies and conserves energy.

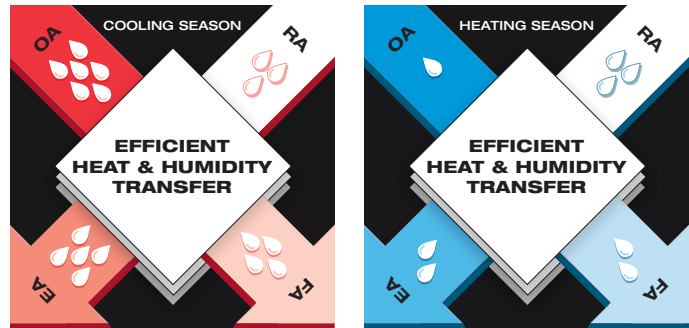

REDUCING HVAC LOADS

RenewAire technology reduces **HVAC loads** during both winter and summer. In turn, HVAC equipment size and needs can be decreased and furnaces and air conditioners can be smaller. This process ensures efficient operations and keeps both energy use and costs low, while at the same time maintaining high-level IAQ.



MINIMIZING ENVIRONMENTAL IMPACT

The combination of less energy used and HVAC loads being reduced conserves resources. Further, our Madison, WI plant is 100% powered by renewable wind energy, and is one of the few buildings worldwide to be LEED and Green Globes certified, as well as having achieved ENERGY STAR Building status. This commitment to sustainable manufacturing minimizes our overall production and distribution environmental footprint.



WHY RENEWAIRE IS PREFERRED



BEST VALUE

- ♦ Priced competitively against other ERV models
- ♦ Due to competitive pricing and decreased costs, payback is short and ROI is maximized
- ♦ Contractors can pass these significant savings along to their customers



RELIABLE OPERATION

- ♦ Built-to-last ERVs have lifespans of 25+ years and operate consistently year-round in every extreme, including frost-free performance in all but the most severe winter climates
- ♦ High-efficiency core operates dry in all conditions, meaning no condensate pans
- ♦ An industry-leading ten-year warranty for the static-plate core, two-year warranty for commercial products and a five-year warranty for residential products
- ♦ Superior product quality results in paramount reliability and longevity



HIGHEST-QUALITY INDOOR AIR

- ♦ Stale indoor air is replaced with fresh, conditioned and filtered air from the outside, resulting in Enhanced IAQ by removing harmful contaminants
- ♦ Airstreams do not mix and pollutants are not transferred across partition plates
- ♦ No biocide used; material does not promote biological growth
- ♦ Moderated temperatures and humidity maintain a comfortable indoor environment



OPTIMIZED ENERGY EFFICIENCY

- ♦ Efficient heat and humidity transfer recaptures up to 70-80% of the energy exhausted in the airstream
- ♦ Energy that's otherwise wasted by conventional ventilation systems (such as bath fans) is reused, thus dramatically reducing monthly operation costs
- ♦ Energy-efficient operation decreases HVAC loads, which cuts down on energy use and costs
- ♦ The hotter or colder the climate, the more energy is recovered



HIGHLY CERTIFIED

- ♦ See individual catalog submittal for certification details:
 - ♦ UL
 - ♦ cUL
 - ♦ ETL
 - ♦ HVI
 - ♦ AHRI



SL 70H

INDOOR UNIT

NEW

Energy Recovery Ventilator EC Motor Standard



Download specification at:
renewaire.com/specifications

SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Continuous Operation Airflow: 51-76 CFM
Boost Mode Airflow: 76-94 CFM

Unit is HVI Tested/Certified per CSA C439 Protocol: Using one L-30 G5 Core

Standard Features:
Unit may be mounted in any orientation
Low-voltage circuit for controls
Hard wiring in electrical box
Dial-A-Flow - balance and airflow adjustment
Variable speed
Boost mode
Cross-core differential pressure ports
Gray painted cabinet

Controls:
Onboard digital controller with independent variable speeds

Filters:
Total qty. 2, MERV 8, spun-polyester media:
7 1/2" x 10 1/2" x 1"

Unit Dimensions & Weight:
27 1/4" L x 20 3/8" W x 9 1/2" H
32 lbs.

Max. Shipping Dimensions & Weight (in carton):
29 1/2" L x 22 1/2" W x 11 1/2" H
38 lbs.

Motor(s):
Qty. 2, 48V DC motorized impeller packages

Accessories:
Backdraft damper 6"
Wall cap 6" - white, brown
Digital time clock - wall mount (TC7D-W),
in exterior enclosure (TC7D-E)
Carbon dioxide sensor/control - wall mount (CO2-W)
IAQ sensor - wall mount (IAQ-W)
Motion occupancy sensor/control -
ceiling mount (MC-C), wall mount (MC-W)
Percentage timer control (PTL)
Percentage timer control with furnace interlock (FM)
Push-button point-of-use controls (PBL), PTL req'd.
MERV 13 filter - OA airstream
Wall bracket kit
Electric duct heater - RH series (1-4 kW);
designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the SL70H.

EC MOTOR OPERATING RANGE


Sample Points Depicted in Larger Dots			
Airflow (CFM)	External Static Pressure (Inches Water Column)	Unit Power Consumption (Watts)	
Continuous Mode	82	0.1	62
	77	0.2	60
	72	0.3	59
	67	0.4	58
	61	0.5	56
	54	0.6	54
	45	0.7	51
Boost Mode	34	0.8	47
	108	0.1	104
	102	0.2	102
	95	0.3	100
	91	0.4	99
	89	0.5	97
	85	0.6	96
	81	0.7	94
	76	0.8	92
	70	0.9	89
61	1.0	85	

Note: Watts is for the entire unit.
Note: Airflow performance includes effect of clean, standard filter supplied with unit.
Note: Refer to CORES for specific operating point electrical data.


ELECTRICAL DATA

Watts	Volts	HZ	Phase	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device
96	120	60	1	2	10	15

Specifications may be subject to change without notice.

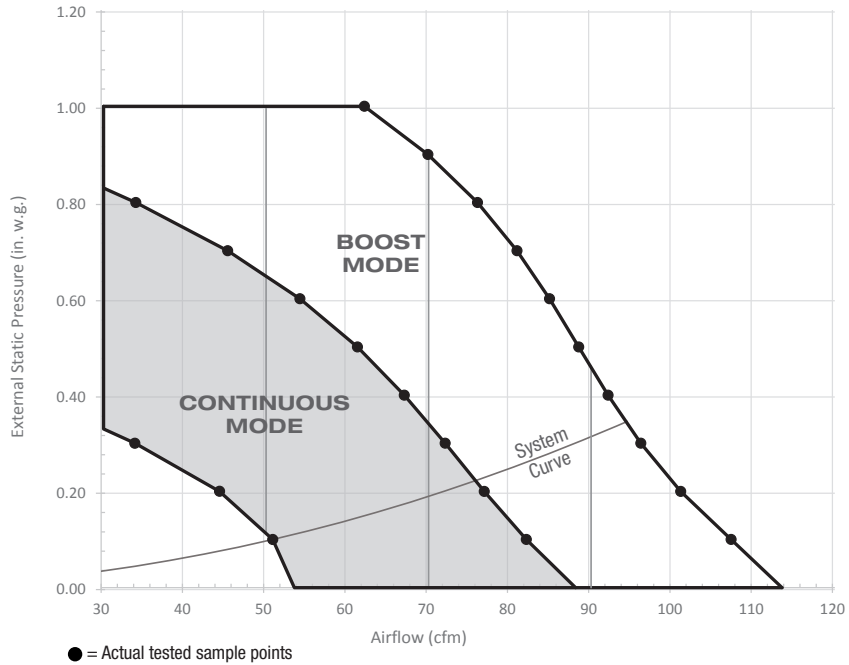


CORE PERFORMANCE

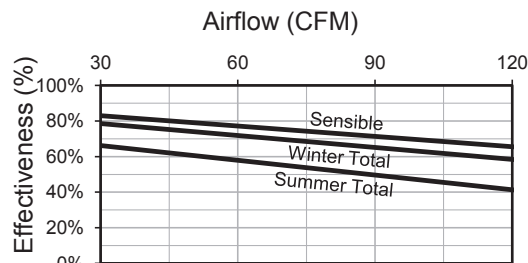


At AHRI 1060 standard conditions. See all AHRI certified ratings at www.ahrinet.org.

* See performance ratings per CSA C439 on page 25 of RenewAire's Single/Multi-Family Catalog.


SL70H Energy Recovery Ventilator EC Motor Standard

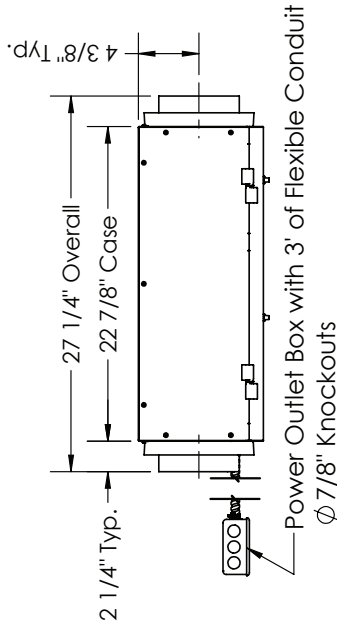

TOP VIEW

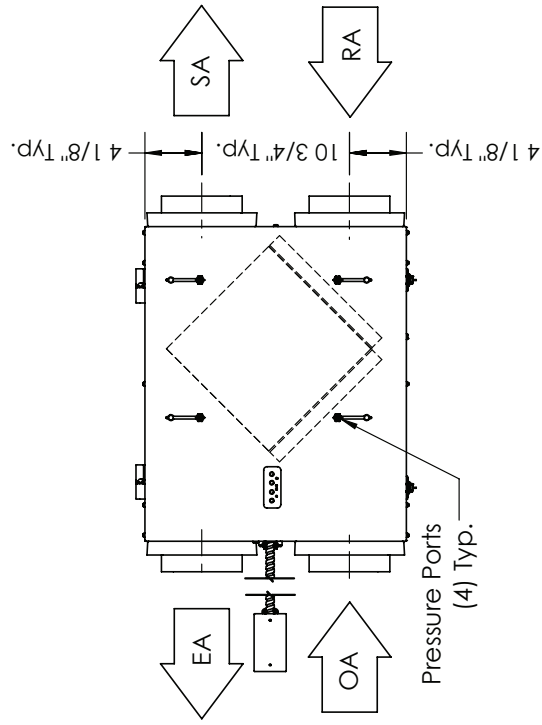

FRONT VIEW

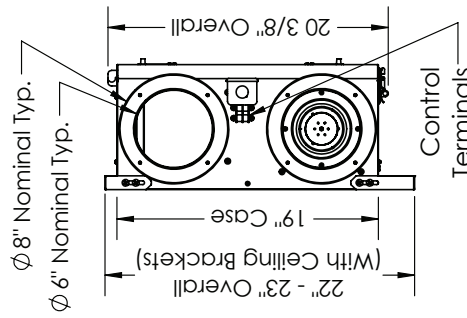


LEFT VIEW
(Hard Mount Depicted)

ABBREVIATIONS
EA: Exhaust Air to outside
OA: Outside Air intake
RA: Room Air to be exhausted
FA: Fresh Air to inside

INSTALLATION ORIENTATION
Unit may be installed in any orientation.

NOTE
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

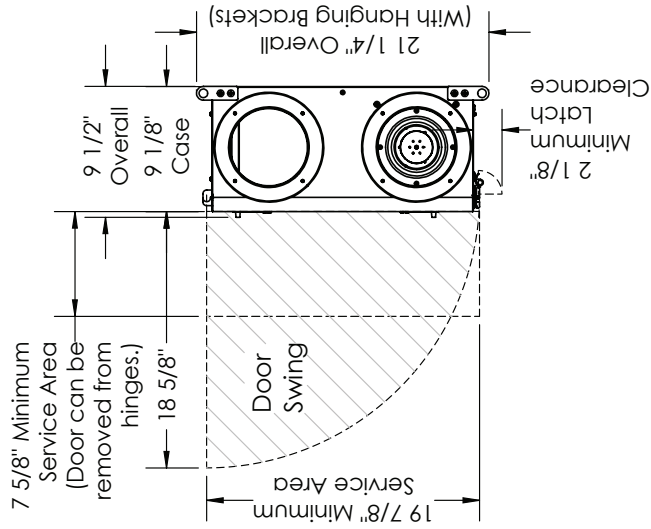

RIGHT VIEW
(Hanging Mount Depicted)



AIRFLOW CONFIGURATION
Available as shown in dimension drawing.



UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

SL 70L

INDOOR UNIT

NEW

Energy Recovery Ventilator EC Motor Standard



Download specification at:
renewaire.com/specifications

SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Continuous Operation Airflow: 51-76 CFM
Boost Mode Airflow: 76-94 CFM

Unit is HVI Tested/Certified per CSA C439
Protocol: Using one L-30 G5 Core

Standard Features:
Unit may be mounted in any orientation
Low-voltage circuit for controls
Line-cord power supply
Dial-A-Flow - balance and airflow adjustment
Variable speed
Boost mode
Cross-core differential pressure ports
Gray painted cabinet

Controls:
Onboard digital controller with independent variable speeds

Filters:
Total qty. 2, MERV 8, spun-polyester media:
7 1/2" x 10 1/2" x 1"

Unit Dimensions & Weight:
27 1/4" L x 20 3/8" W x 9 1/2" H
32 lbs.

Max. Shipping Dimensions & Weight (in carton):
29 1/2" L x 22 1/2" W x 11 1/2" H
38 lbs.

Motor(s):
Qty. 2, 48V DC motorized impeller packages

Accessories:
Backdraft damper 6"
Wall cap 6" - white, brown
Digital time clock - wall mount (TC7D-W),
in exterior enclosure (TC7D-E)
Carbon dioxide sensor/control - wall mount (CO2-W)
IAQ sensor - wall mount (IAQ-W)
Motion occupancy sensor/control -
ceiling mount (MC-C), wall mount (MC-W)
Percentage timer control (PTL)
Percentage timer control with furnace interlock (FM)
Push-button point-of-use controls (PBL), PTL req'd.
MERV 13 filter - OA airstream
Wall bracket kit
Electric duct heater - RH series (1-4 kW);
designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the SL70L.

EC MOTOR OPERATING RANGE

Sample Points Depicted in Larger Dots			
	Airflow (CFM)	External Static Pressure (Inches Water Column)	Unit Power Consumption (Watts)
Continuous Mode	82	0.1	62
	77	0.2	60
	72	0.3	59
	67	0.4	58
	61	0.5	56
	54	0.6	54
	45	0.7	51
	34	0.8	47
Boost Mode	108	0.1	104
	102	0.2	102
	95	0.3	100
	91	0.4	99
	89	0.5	97
	85	0.6	96
	81	0.7	94
	76	0.8	92
	70	0.9	89
	61	1.0	85

Note: Watts is for the entire unit.


Note: Airflow performance includes effect of clean, standard filter supplied with unit.

Note: Refer to CORES for specific operating point electrical data.


ELECTRICAL DATA

Watts	Volts	HZ	Phase	FLA per motor	Min. Cir. Amps	Max. Overcurrent Protection Device
96	120	60	1	2	10	15

Specifications may be subject to change without notice.

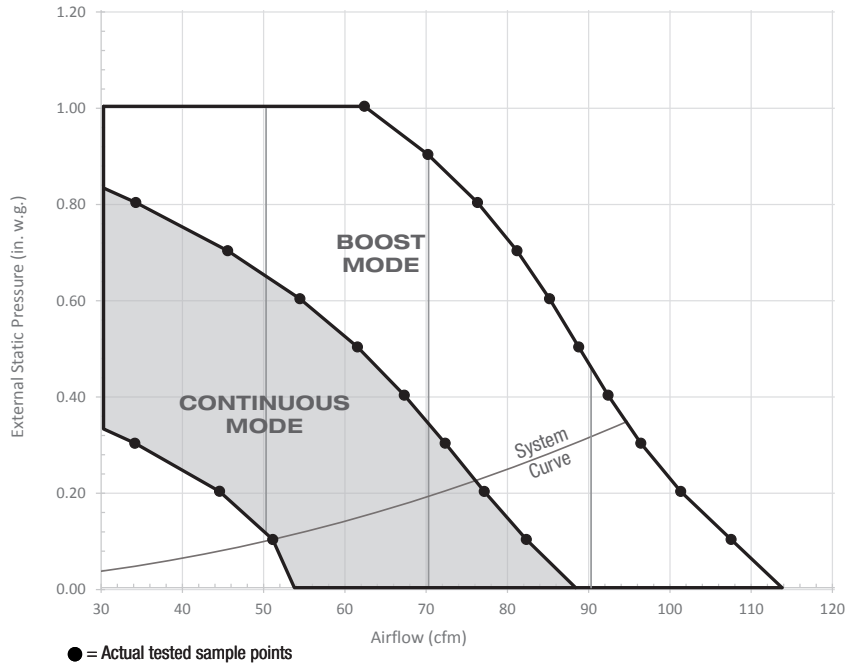


CORE PERFORMANCE

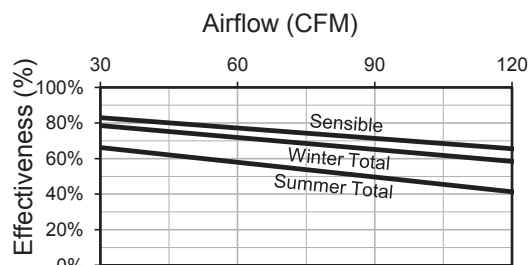

At AHRI 1060 standard conditions. See all AHRI certified ratings at www.ahrinet.org.

* See performance ratings per CSA C439 on page 25 of RenewAire's Single/Multi-Family Catalog.

SL70L Energy Recovery Ventilator EC Motor Standard

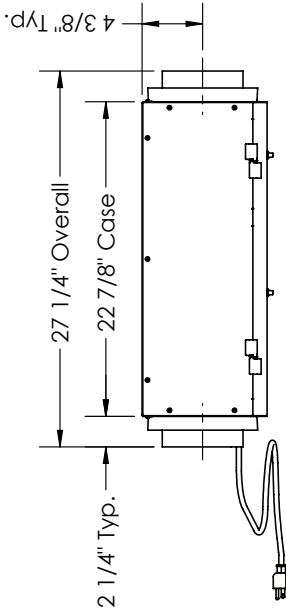


TOP VIEW



ABBREVIATIONS
 EA: Exhaust Air to outside
 OA: Outside Air intake
 RA: Room Air to be exhausted
 FA: Fresh Air to inside

INSTALLATION ORIENTATION
 Unit may be installed in any orientation.


NOTE
 1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
 2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

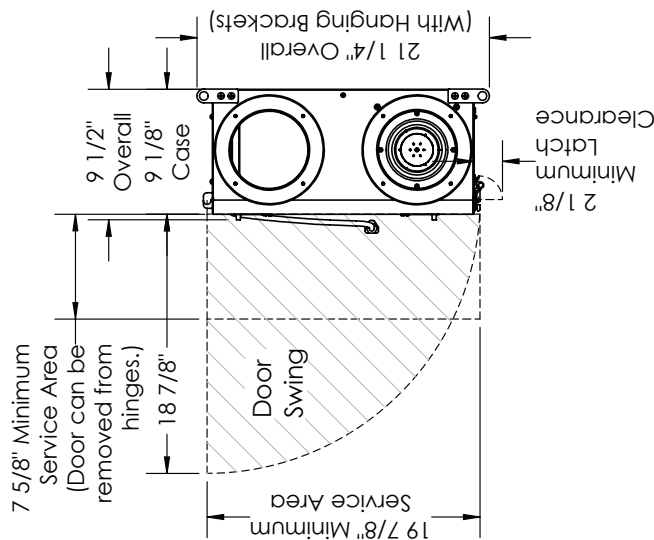

RIGHT VIEW
 (Hanging Mount Depicted)

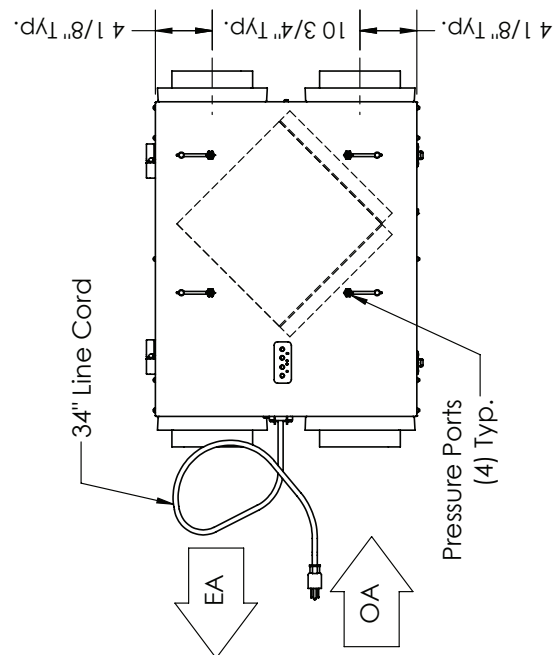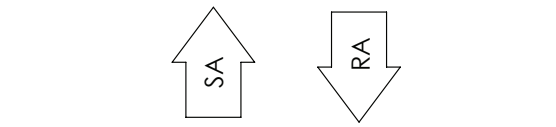

FRONT VIEW

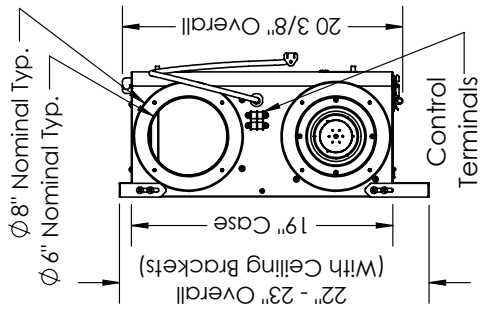

LEFT VIEW
 (Hard Mount Depicted)

AIRFLOW CONFIGURATION
 Available as shown in dimension drawing.

UNIT MOUNTING & APPLICATION
 Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

BR 70

INDOOR UNIT
Duct Mounted or Thru-the-Wall

Energy Recovery Ventilator Standard



Download specification at:
renewaire.com/specifications

SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 40-70 CFM

Unit is Tested to CSA C439 Protocol:
Using one L-30 G5 Core

Standard Features:
White painted cabinet
Line-cord power supply
Built-in control
Unit may be mounted in any orientation
Cross-core differential pressure ports

Control:
Built-in proportional runtime control and switched terminals for furnace/AC interconnect

Filters:
Total qty. 2, MERV 8, spun-polyester media:
7 1/2" x 10 1/2" x 1"

Unit Dimensions & Weight:
29 3/4" L x 19 1/4" W x 10 3/4" H
38 lbs.

Max. Shipping Dimensions & Weight (in carton):
30" L x 22" W x 15" H
50 lbs.

Motor(s):
Qty. 1, Double-shaft standard motor

Accessories:
Backdraft damper 6"
Wall cap 6" - white, brown
Exterior thru-the-wall installation kit
Duct collar kit (two collars)
Electric duct heater - RH series (1-11.5 kW);
designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the BR70.

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.08	120	60	Single	94 @ 69 CFM	1.0

UNIT PERFORMANCE

Airflow CFM	ESP in H ₂ O
46	0.40
59	0.30
73	0.20
86	0.10

CORE PERFORMANCE


Temp EFF%	Total EFF% Winter/Summer*
80	75/62
77	72/58
75	69/54
72	66/51

* See performance ratings per CSA C439 on page 25 of RenewAire's Single/Multi-Family Catalog.

UNIT DIMENSIONS

AIRFLOW CONFIGURATION
Available as shown in dimension drawing.


UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. If duct-mounted, airstreams cannot be switched. If mounted with exterior Thru-the-wall installation kit, the RA/EA airstreams are switched with the OA/FA airstreams. If four ducts are connected using duct collar kit, airstreams may be switched.

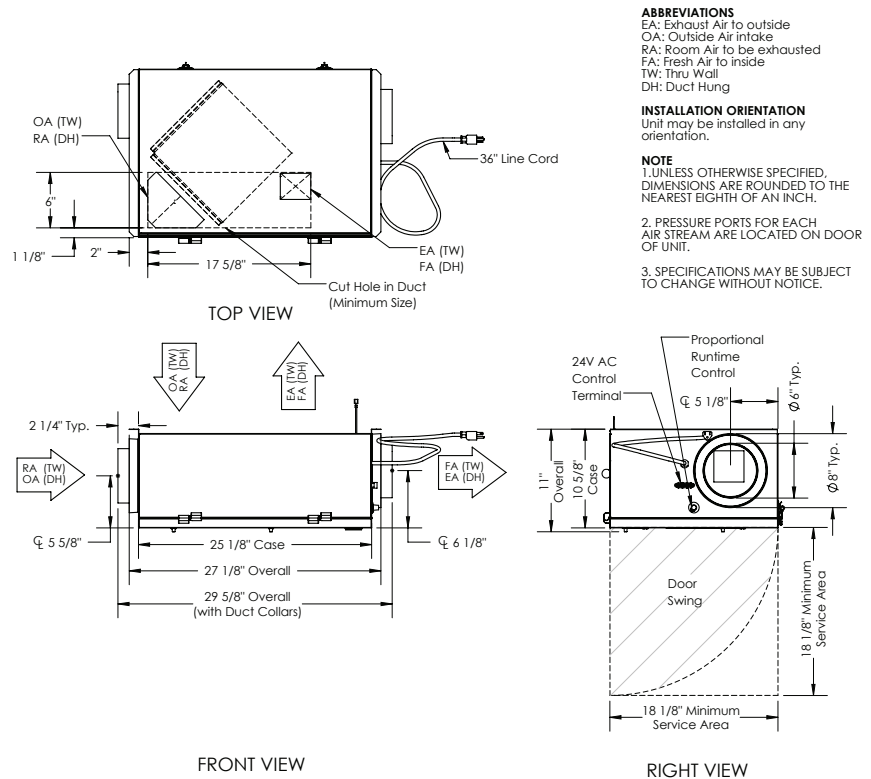

Specifications may be subject to change without notice.

BR 130

INDOOR UNIT
Duct Mounted or Thru-the-Wall

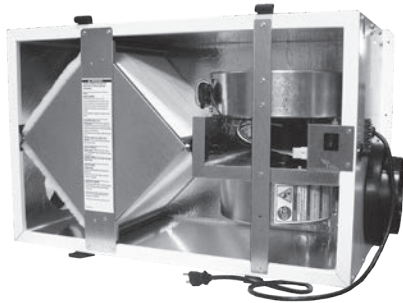

Download specification at:
renewaire.com/specifications

Energy Recovery Ventilator
Standard



SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 50-140 CFM

Unit is HVI Tested/Certified per CSA C439 Protocol: Using one L-50 G5 Core

Standard Features:
White painted cabinet
Line-cord power supply
Built-in control
Unit may be mounted in any orientation
Cross-core differential pressure ports

Control:
Built-in proportional runtime control and switched terminals for furnace/AC interconnect

Filters:
Total qty. 2, MERV 8, spun-polyester media:
10 1/2" x 10 1/2" x 1"

Unit Dimensions & Weight:
33 1/2" L x 19 1/4" W x 13 1/2" H
48 lbs.

Max. Shipping Dimensions & Weight (in carton):
32" L x 22" W x 18" H
60 lbs.

Motor(s):
Qty. 1, Double-shaft standard motor

Accessories:
Backdraft damper 6"
Wall cap 6" - white, brown
Exterior thru-the-wall installation kit
Duct collar kit (two collars)
Electric duct heater - RH series (1-11.5 kW);
designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the BR130.

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.1	120	60	Single	121 @ 124 CFM	1.3

UNIT PERFORMANCE

Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
52	0.70	82	78/65
69	0.60	80	75/62
94	0.50	76	71/57
113	0.40	74	68/53
132	0.30	71	65/49
141	0.20	70	63/47
148	0.10	69	62/46


CORE PERFORMANCE

* See HVI certification ratings on page 24 of RenewAire's Single/Multi-Family Catalog.

UNIT DIMENSIONS

AIRFLOW CONFIGURATION
Available as shown in dimension drawing.

UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. If duct-mounted, airstreams cannot be switched. If mounted with exterior Thru-the-wall installation kit, the RA/EA airstreams are switched with the OA/FA airstreams. If four ducts are connected using duct collar kit, airstreams may be switched.

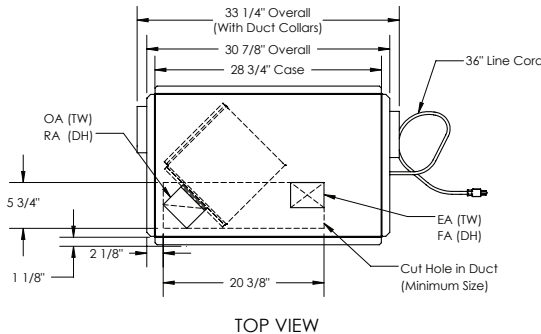

ABBREVIATIONS


EA: Exhaust Air to outside
OA: Outside Air intake
RA: Room Air to be exhausted
FA: Fresh Air to inside
TW: Thru Wall
DH: Duct Hung

INSTALLATION ORIENTATION


Unit may be installed in any orientation.

NOTE


- UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
- PRESSURE PORTS FOR EACH AIR STREAM ARE LOCATED ON DOOR OF UNIT.
- SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.



LEFT VIEW

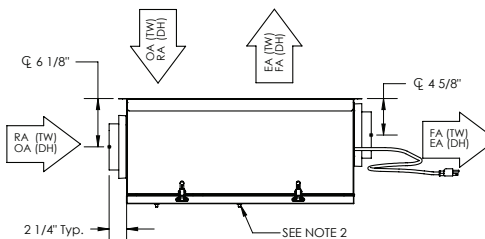

FRONT VIEW

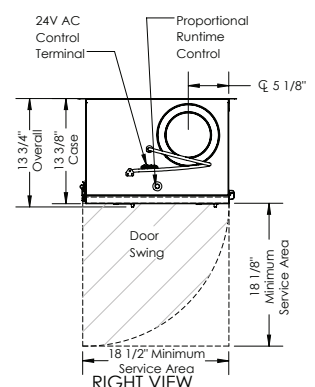


RIGHT VIEW

Specifications may be subject to change without notice.

GR 90

INDOOR UNIT



Download specification at:
renewaire.com/specifications

Energy Recovery Ventilator Standard



SPECIFICATIONS

Ventilation Type:

Static plate, heat and humidity transfer

Typical Airflow Range: 40-110 CFM

Unit is HVI Tested/Certified per CSA C439

Protocol: Using one L-35 G5 Core

Standard Features:

- Galvanized cabinet
- Terminal strip hard wiring in ebox (no line cord)
- Unit may be mounted in any orientation
- Cross-core differential pressure ports

Control:

Can use any switched line-voltage power supply (no low-voltage controls)

Filters:

Total qty. 2, MERV 8, spun-polyester media:
9 5/8" x 10 1/2" x 1"

Unit Dimensions: & Weight

22 1/2" L x 11 3/4" W x 23 3/4" H
36 lbs.

Max. Shipping Dimensions & Weight (in carton):

29" L x 22" W x 15" H
40 lbs.

Motor(s):

Qty. 2, Standard motorized impeller blowers

Accessories:

- Backdraft damper 6"
- Wall cap 6" - white, brown
- 120V line voltage Honeywell control
- Electric duct heater - RH series (1-11.5 kW);
designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the GR90.

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.03	120	60	Single	46 @ 90 CFM	0.35

UNIT PERFORMANCE

Airflow CFM	ESP in H ₂ O
40	0.60
58	0.50
73	0.40
85	0.30
98	0.20
113	0.10

CORE PERFORMANCE

Temp EFF%	Total EFF% Winter/Summer*
84	74/56
80	69/50
77	65/46
74	62/43
71	59/39
68	56/34

* See HVI certification ratings on page 24 of RenewAire's Single/Multi-Family Catalog.

UNIT DIMENSIONS



AIRFLOW CONFIGURATION
Available as shown in dimension drawing.



UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

ABBREVIATIONS


- EA: Exhaust Air to outside
- OA: Outside Air Intake
- RA: Room Air to be exhausted
- FA: Fresh Air to inside

INSTALLATION ORIENTATION

Unit may be installed in any orientation.

NOTE

- UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
- SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

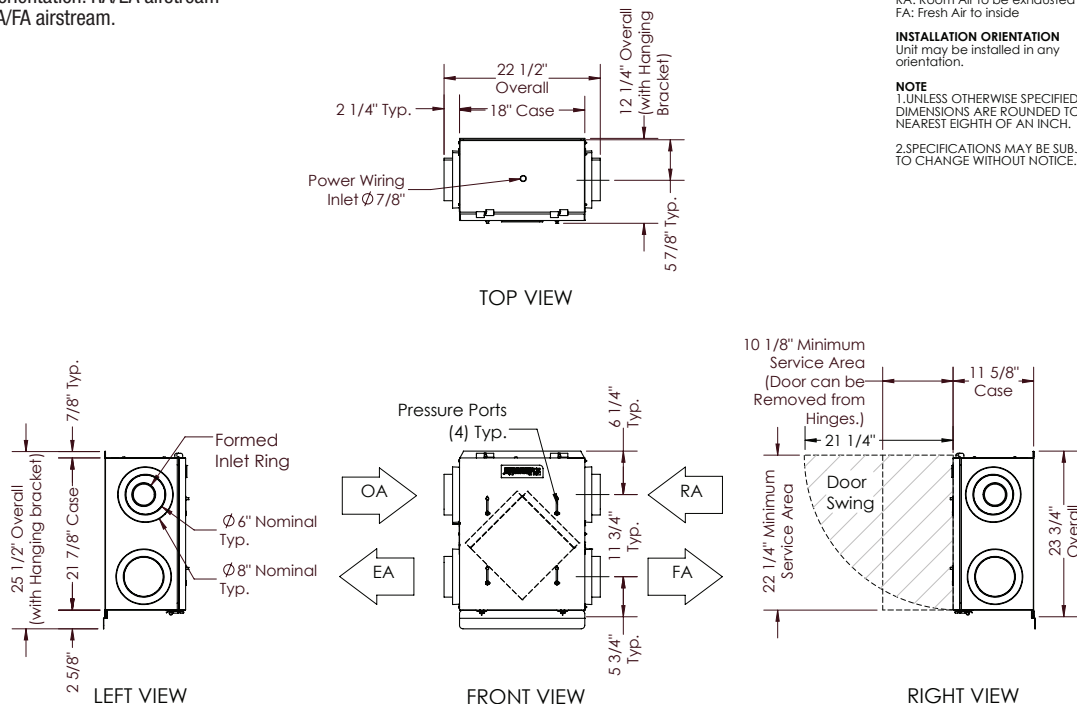

Specifications may be subject to change without notice.



EV 90

INDOOR UNIT

Energy Recovery Ventilator Standard



Download specification at:
renewaire.com/specifications

SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 40-110 CFM

Unit is HVI Tested/Certified per CSA C439 Protocol: Using one L-35 G5 Core

Standard Features:
White painted cabinet
Line-cord power supply
Low-voltage circuit for controls
Unit may be mounted in any orientation
Cross-core differential pressure ports

Control:
Onboard 24 VAC transformer/relay package with switched dry contacts

Filters:
Total qty. 2, MERV 8, spun-polyester media:
9 5/8" x 10 1/2" x 1"

Unit Dimensions & Weight:
22 1/2" L x 11 3/4" W x 23 3/4" H
36 lbs.

Max. Shipping Dimensions & Weight (in carton):
29" L x 22" W x 15" H
40 lbs.

Motor(s):
Qty. 2, Standard motorized impeller blowers

Accessories:
Backdraft damper 6"
Wall cap 6" - white, brown
Percentage timer control (PTL)
Push-button point-of-use controls (PBL), PTL req'd.
Percentage timer control with furnace interlock (FM)
Electric duct heater - RH series (1-11.5 kW);
designed for indoor ductwork installation only

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.03	120	60	Single	46 @ 90 CFM	0.35

Note: Indirect Gas-Fired Duct Furnace is not available on the EV90.

UNIT PERFORMANCE

Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
40	0.60	84	74/56
58	0.50	80	69/50
73	0.40	77	65/46
85	0.30	74	62/43
98	0.20	71	59/39
113	0.10	68	56/34


CORE PERFORMANCE

* See HVI certification ratings on page 24 of RenewAire's Single/Multi-Family Catalog.

UNIT DIMENSIONS

AIRFLOW CONFIGURATION
Available as shown in dimension drawing.

UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.



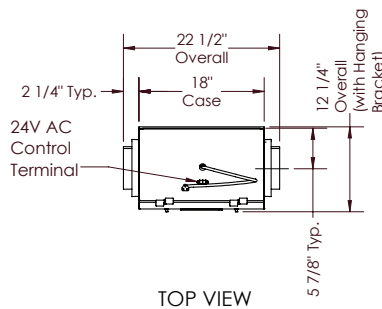


ABBREVIATIONS
EA: Exhaust Air to outside
OA: Outside Air intake
RA: Room Air to be exhausted
FA: Fresh Air to inside

INSTALLATION ORIENTATION
Unit may be installed in any orientation.

NOTE
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.


2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

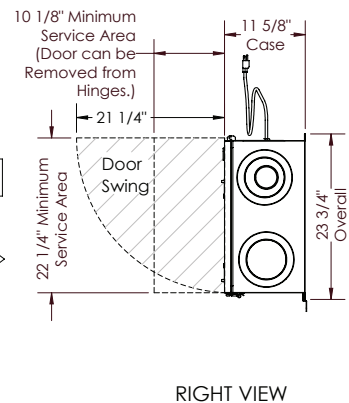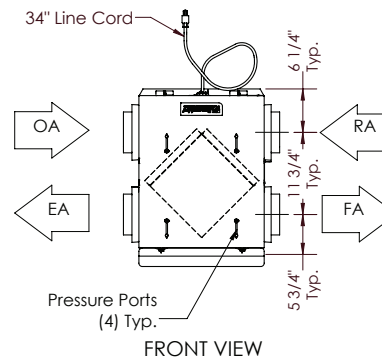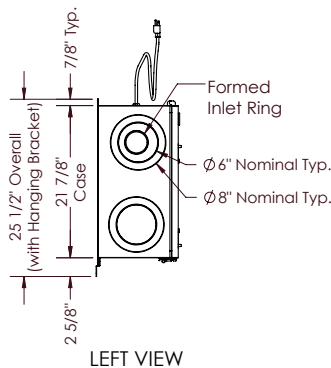

Specifications may be subject to change without notice.

EV 90P

INDOOR UNIT



Download specification at:
renewaire.com/specifications

Energy Recovery Ventilator Standard



SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 40-110 CFM

Unit is HVI Tested/Certified per CSA C439
Protocol: Using one L-100 G5 Core

Standard Features:
White painted cabinet
Line-cord power supply
Low-voltage circuit for controls
Unit may be mounted in any orientation
Cross-core differential pressure ports

Controls:
Onboard 24 VAC transformer/relay package
with switched dry contacts

Filters:
Total qty. 2, MERV 8, spun-polyester media:
21 3/4" x 10 1/2" x 1"

Unit Dimensions & Weight:
22 1/2" L x 24" W x 23 3/4" H
51 lbs.

Max. Shipping Dimensions & Weight (in carton):
33" L x 22" W x 29" H
65 lbs.

Motor(s):
Qty. 2, Standard motorized impeller blowers

Accessories:
Backdraft damper 6"
Wall cap 6" - white, brown
Percentage timer control (PTL)
Push-button point-of-use controls (PBL), PTL req'd.
Percentage timer control with furnace interlock (FM)
Electric duct heater - RH series (1-11.5 kW);
designed for indoor ductwork installation only

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.03	120	60	Single	44 @ 90 CFM	0.35

Note: Indirect Gas-Fired Duct Furnace is not available on the EV90P.

UNIT PERFORMANCE

Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
42	0.60	86	83/71
56	0.50	85	82/70
73	0.40	84	80/68
87	0.30	83	79/67
99	0.20	82	78/66
108	0.10	82	78/65


CORE PERFORMANCE

UNIT DIMENSIONS

* See HVI certification ratings on page 24 of RenewAire's Single/Multi-Family Catalog.

AIRFLOW CONFIGURATION
Available as shown in dimension drawing.

UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

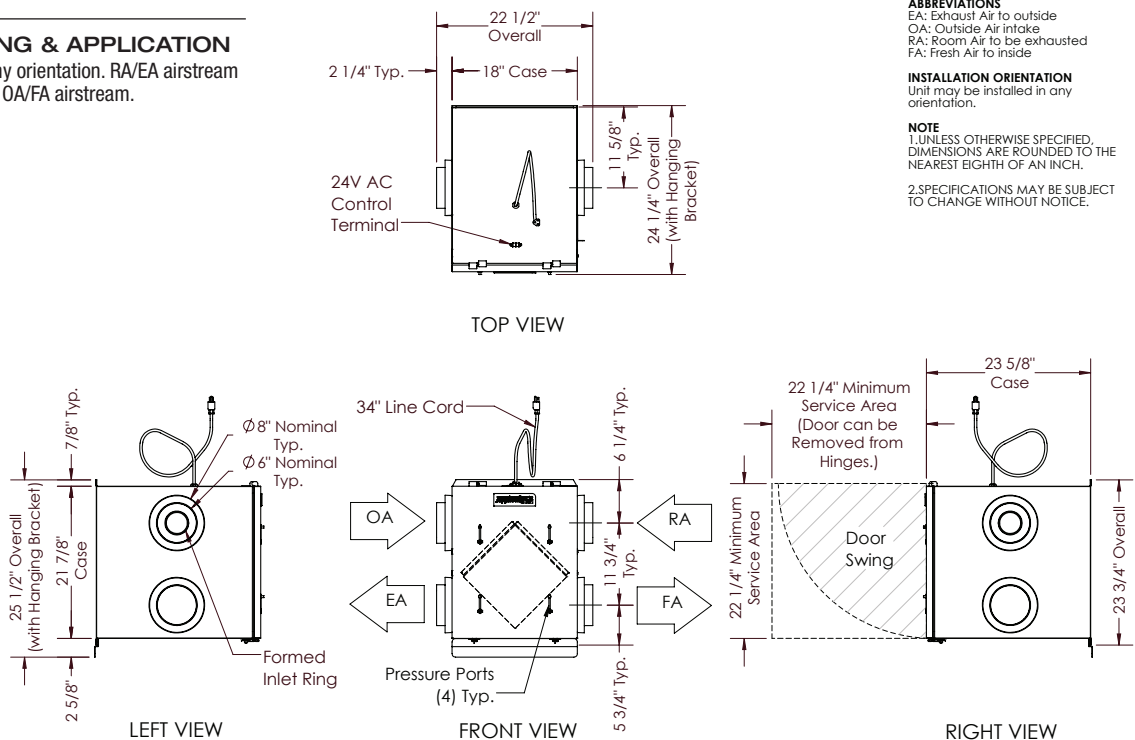

Specifications may be subject to change without notice.

EV 130

INDOOR UNIT

Energy Recovery Ventilator Standard



Download specification at:
renewaire.com/specifications

SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 50-140 CFM

Unit is HVI Tested/Certified per CSA C439 Protocol: Using one L-50 G5 Core

Standard Features:
White painted cabinet
Line-cord power supply
Low-voltage circuit for controls
Unit may be mounted in any orientation
Cross-core differential pressure ports

Controls:
Onboard 24 VAC transformer/relay package with switched dry contacts

Filters:
Total qty. 2, MERV 8, spun-polyester media:
10 1/2" x 10 1/2" x 1"

Unit Dimensions & Weight:
33 1/2" L x 13 1/4" W x 20" H
48 lbs.

Max. Shipping Dimensions & Weight (in carton):
32" L x 22" W x 18" H
60 lbs.

Motor(s):
Qty. 1, Double-shaft standard motor

Accessories:
Backdraft damper 6"
Wall cap 6" - white, brown
Percentage timer control (PTL)
Push-button point-of-use controls (PBL), PTL req'd.
Percentage timer control with furnace interlock (FM)
Electric duct heater - RH series (1-11.5 kW);
designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the EV130.

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.1	120	60	Single	102 @ 130 CFM	1.3

UNIT PERFORMANCE

Airflow CFM	ESP in H ₂ O
79	0.60
104	0.50
126	0.40
137	0.30
153	0.20
165	0.10

CORE PERFORMANCE


Temp EFF%	Total EFF% Winter/Summer*
78	73/60
75	69/55
72	66/50
71	64/48
68	61/45
67	59/43

* See HVI certification ratings on page 24 of RenewAire's Single/Multi-Family Catalog.


UNIT DIMENSIONS

AIRFLOW CONFIGURATION
Available as shown in dimension drawing.


UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

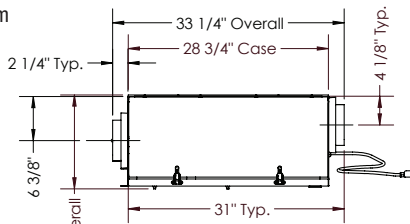


TOP VIEW



LEFT VIEW

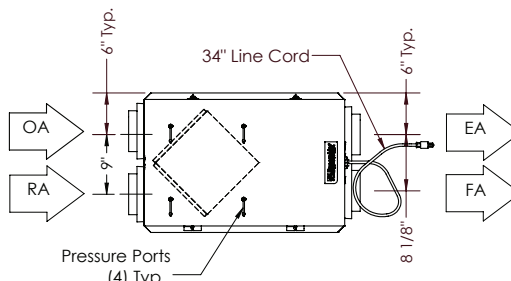

FRONT VIEW

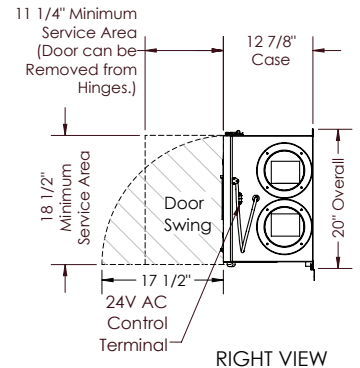

RIGHT VIEW

ABBREVIATIONS
EA: Exhaust Air to outside
OA: Outside Air Intake
RA: Room Air to be exhausted
FA: Fresh Air to inside

INSTALLATION ORIENTATION
Unit may be installed in any orientation.

NOTE
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

Specifications may be subject to change without notice.

EV 200

INDOOR UNIT



Download specification at:
renewaire.com/specifications

Energy Recovery Ventilator Standard



SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 100-200 CFM

Unit is HVI Tested/Certified per CSA C439
Protocol: Using one L-100 G5 Core

Standard Features:
White painted cabinet
Line-cord power supply
Low-voltage circuit for controls
Unit may be mounted in any orientation
Cross-core differential pressure ports

Controls:
Onboard 24 VAC transformer/relay package with switched dry contacts

Filters:
Total qty. 2, MERV 8, spun-polyester media:
10 1/2" x 21 3/4" x 1"

Unit Dimensions & Weight:
33 1/2" L x 24" W x 20" H
68 lbs.

Max. Shipping Dimensions & Weight (on pallet):
34" L x 44" W x 34" H
110 lbs.

Motor(s):
Qty. 1, Double-shaft standard motor

Accessories:
Backdraft damper 6", 8"
Wall cap 6" - white, brown
Wall cap 8" - taupe vinyl, galvanized, paintable galvanneal
Louver with 8" round duct connection - 12" (W) x 8" (H)
Percentage timer control (PTL)
Push-button point-of-use controls (PBL), PTL req'd.
Percentage timer control with furnace interlock (FM)
Electric duct heater - RH series (1-11.5 kW); designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the EV200.

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.1	120	60	Single	157 @ 181 CFM	1.5


UNIT PERFORMANCE		CORE PERFORMANCE	
Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
122	0.70	81	77/64
149	0.60	79	75/61
168	0.50	78	73/59
176	0.40	78	72/59
186	0.30	77	72/58
192	0.20	77	71/57
207	0.10	76	70/56

* See HVI certification ratings on page 24 of RenewAire's Single/Multi-Family Catalog.

UNIT DIMENSIONS

AIRFLOW CONFIGURATION
Available as shown in dimension drawing.




UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

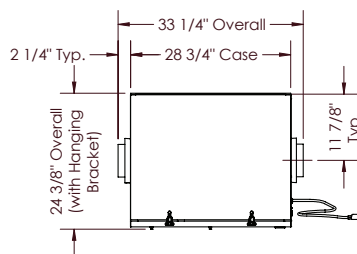

ABBREVIATIONS
EA: Exhaust Air to outside
OA: Outside Air intake
RA: Room Air to be exhausted
FA: Fresh Air to inside

INSTALLATION ORIENTATION
Unit may be installed in any orientation.

NOTE
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

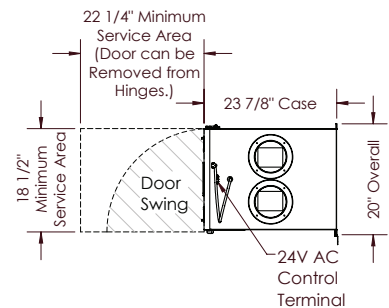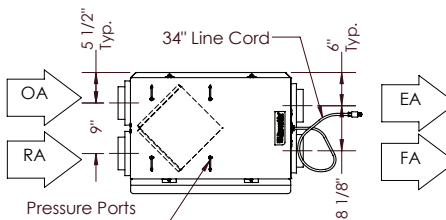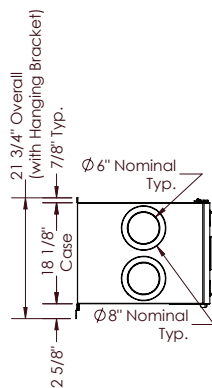

LEFT VIEW

FRONT VIEW

RIGHT VIEW

Specifications may be subject to change without notice.



EV 240

INDOOR UNIT

Energy Recovery Ventilator Standard



Download specification at:
renewaire.com/specifications

SPECIFICATIONS

Ventilation Type:

Static plate, heat and humidity transfer

Typical Airflow Range: 100-240 CFM

Unit is HVI Tested/Certified per CSA C439

Protocol: Using one L-100 G5 Core

Standard Features:

White painted cabinet
Line-cord power supply
Low-voltage circuit for controls
Unit may be mounted in any orientation
Cross-core differential pressure ports

Controls:

Onboard 24 VAC transformer/relay package with switched dry contacts

Filters:

Total qty. 2, MERV 8, spun-polyester media:
10 1/2" x 21 3/4" x 1"

Unit Dimensions & Weight:

33 1/2" L x 24" W x 20" H
70 lbs.

Max. Shipping Dimensions & Weight (on pallet):

34" L x 44" W x 34" H
112 lbs.

Motor(s):

Qty. 1, Double-shaft standard motor

Accessories:

Backdraft damper 6", 8"
Wall cap 6" - white, brown
Wall cap 8" - taupe vinyl, galvanized, paintable galvanneal
Louver with 8" round duct connection - 12" (W) x 8" (H)
Percentage timer control (PTL)
Push-button point-of-use controls (PBL), PTL req'd.
Percentage timer control with furnace interlock (FM)
Electric duct heater - RH series (1-11.5 kW); designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the EV240.

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.2	120	60	Single	216 @ 236 CFM	3.3

UNIT PERFORMANCE

Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
170	0.80	78	72/59
195	0.70	76	70/56
214	0.60	75	69/54
229	0.50	74	67/53
242	0.40	73	67/53
250	0.30	73	66/52
256	0.20	73	65/51
265	0.10	72	64/50


CORE PERFORMANCE

* See HVI certification ratings on page 24 of RenewAire's Single/Multi-Family Catalog.

UNIT DIMENSIONS

AIRFLOW CONFIGURATION
Available as shown in dimension drawing.

UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

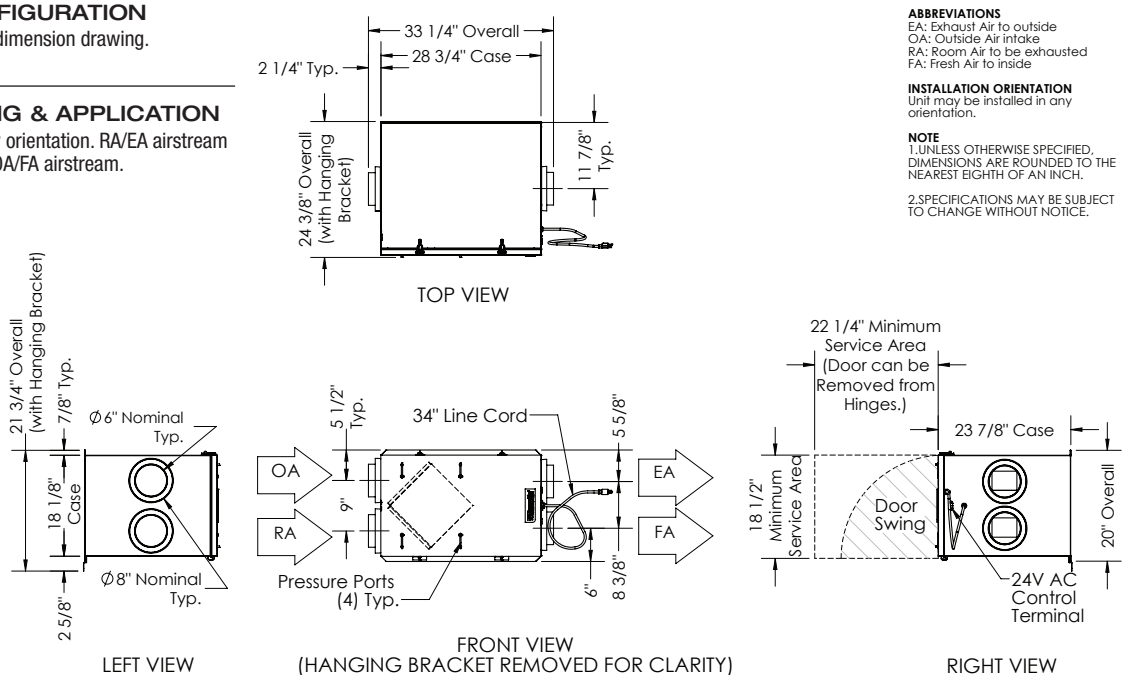

Specifications may be subject to change without notice.

EV 300

INDOOR UNIT



Download specification at:
renewaire.com/specifications

Energy Recovery Ventilator Standard



SPECIFICATIONS

Ventilation Type:
Static plate, heat and humidity transfer

Typical Airflow Range: 150-300 CFM

Unit is HVI Tested/Certified per CSA C439 Protocol: Using one L-100 G5 Core

Standard Features:
White painted cabinet
Line-cord power supply
Low-voltage circuit for controls
Unit may be mounted in any orientation
Cross-core differential pressure ports

Controls:
Onboard 24 VAC transformer/relay package with switched dry contacts

Filters:
Total qty. 2, MERV 8, spun-polyester media: 10 1/2" x 21 3/4" x 1"

Unit Dimensions & Weight:
33 3/4" L x 24" W x 20" H
72 lbs.

Max. Shipping Dimensions & Weight (on pallet):
34" L x 44" W x 34" H
115 lbs.

Motor(s):
Qty. 1, Double-shaft standard motor

Accessories:
Backdraft damper 8"
Wall cap 8" - taupe vinyl, galvanized, paintable galvalume
Louver with 8" round duct connection - 12" (W) x 8" (H)
Percentage timer control (PTL)
Push-button point-of-use controls (PBL), PTL req'd.
Percentage timer control with furnace interlock (FM)
Electric duct heater - RH series (1-11.5 kW); designed for indoor ductwork installation only

Note: Indirect Gas-Fired Duct Furnace is not available on the EV300.

ELECTRICAL DATA

HP	Volts	HZ	Phase	Input Watts	FLA
0.2	120	60	Single	315 @ 297 CFM	3.3


UNIT PERFORMANCE		CORE PERFORMANCE	
Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
170	1.0	78	73/59
191	0.9	77	71/57
215	0.8	75	69/55
256	0.7	73	66/51
277	0.6	71	65/49
295	0.5	70	63/47
311	0.4	69	62/46

* See HVI certification ratings on page 24 of RenewAire's Single/Multi-Family Catalog.


UNIT DIMENSIONS

AIRFLOW CONFIGURATION
Available as shown in dimension drawing.


UNIT MOUNTING & APPLICATION
Can be mounted in any orientation. RA/EA airstream can be switched with OA/FA airstream.

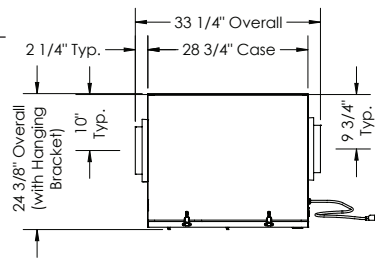


TOP VIEW

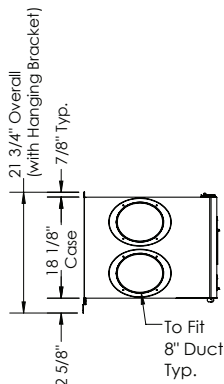

LEFT VIEW

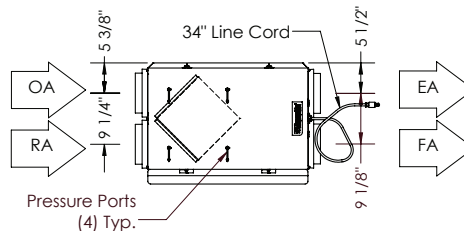

FRONT VIEW

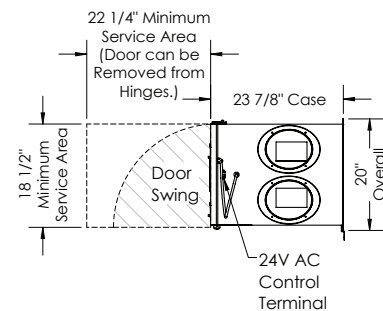

RIGHT VIEW

ABBREVIATIONS
EA: Exhaust Air to outside
OA: Outside Air intake
RA: Room Air to be exhausted
FA: Fresh Air to inside


INSTALLATION ORIENTATION
Unit may be installed in any orientation.

NOTE
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE ROUNDED TO THE NEAREST EIGHTH OF AN INCH.
2. SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.


Specifications may be subject to change without notice.

APPLICATIONS


BR-series Common Installation Approaches (BR70 and BR130)

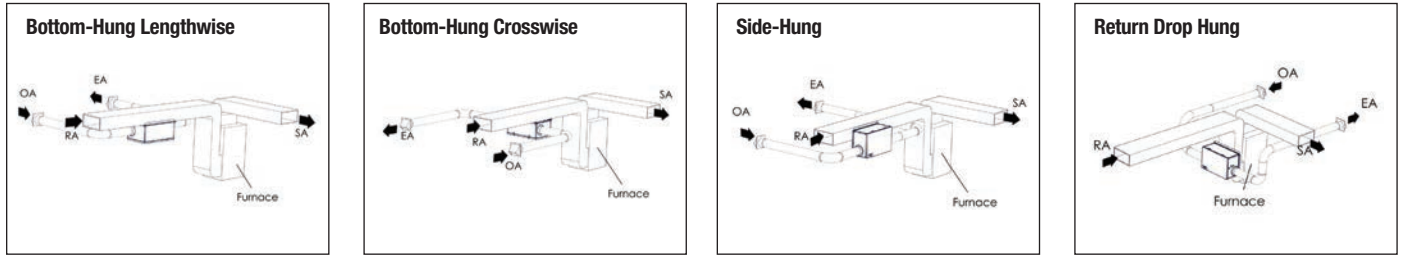


EV-series Common Installation Approaches (EV130, EV200, EV240, and EV300)

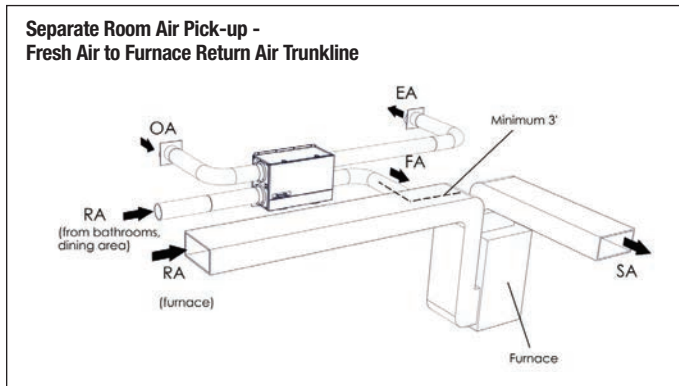


Note: ERV blower may be operated separate from furnace blower.

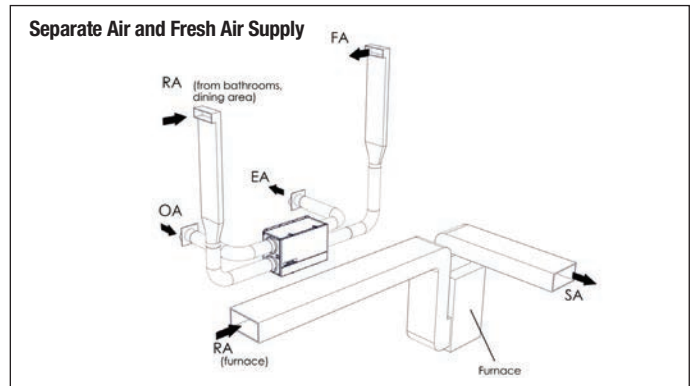

Note: ERV blower may be operated separate from furnace blower.

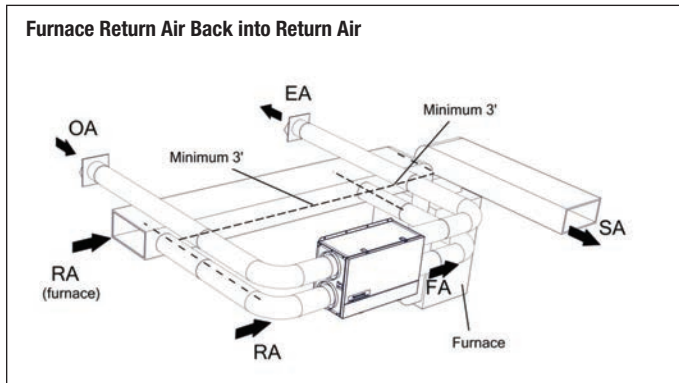


Note: The furnace blower must be operated any time the ERV is operated. Use furnace fan "on" continuous low speed or optional FM control to cycle furnace fan on ERV.

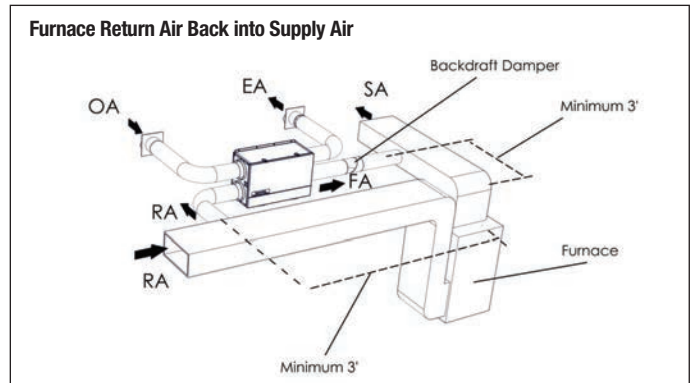

Note: ERV blower may be operated separate from furnace blower.

EV-series Common Installation Approaches (EV90 and EV90P)

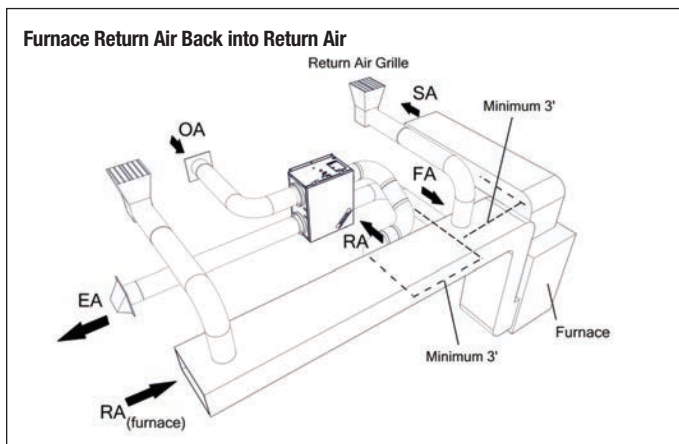

- EA Exhaust Air
- OA Outside Air
- RA Room Air
- SA Supply Air
- FA Fresh Air

Note: The furnace blower must be operated any time the ERV is operated. Use furnace fan "on" continuous low speed or optional FM control to cycle furnace fan on ERV.

ACCESSORIES

Controls

Standard controls are intended to turn RenewAire single/multi-family energy recovery ventilation systems on and off at appropriate times. Installation and set-up is an easy process. RenewAire single/multi-family units are available standard with interface and controls.

BR Series: Built-in percentage run-time with furnace interlock

GR Series: 120V line voltage controls

EV Series: Percentage run timer or percentage run timer with furnace interlock and push button lighted controls

- ♦ **Digital time clock, CO2 sensors, IAQ sensors and motion occupancy sensors** - Can be applied with external 24V supply

SL Series: Built-in low voltage transformer for use with percentage run timer or push button lighted controls for on/off, continuous and/or boost mode operation

- ♦ **Digital time clock, CO2 sensors, IAQ sensors and motion occupancy sensors** - Can be applied with internal low voltage transformer

See individual submittal pages for availability by model.

PERCENTAGE TIMER

Primary control for SL70, EV90, EV90P, EV130, EV200, EV240 & EV300

- ♦ Units can run an adjustable amount of time each hour
- ♦ Two-wire, low-voltage connection



PTL Control

PERCENTAGE TIMER WITH FURNACE INTERLOCK

Alternate primary control for SL70, EV90, EV90P, EV130, EV200, EV240 & EV300

- ♦ Low-voltage wire connects to EV unit and either thermostat or furnace control to turn on furnace blower
- ♦ Six-wire, low-voltage connection



FM Control

PUSH-BUTTON POINT OF USE TIMER

Secondary control used in combination with PTL control for SL70

- ♦ Push-button control turns on unit from bathrooms or other intermittent exhaust locations
- ♦ One-touch, 20-minute run-time
- ♦ Push 2 times for 40 minutes or 3 times for 60 minutes
- ♦ Two-wire, low-voltage connection to PTL control



PBL Control - requires PTL Control

Specifications may be subject to change without notice.

ACCESSORIES

See individual submittal pages for availability by model.

DIGITAL TIME CLOCK

- Up to 8 on/off cycles per day or 56 per week
- 24 VAC power requirement
- Battery back-up
- Wall mount or outdoor enclosure options
- Wall mount fits any 4" x 4" electrical box



TC7D-W
Wall Mount



TC7D-E Control In
NEMA 3R Enclosures

CO2 SENSORS

- Adjustable control from 400-2000 PPM
- Digital display
- 24 VAC power requirement
- Computer/BAS interface for information and control
- Self calibrates during periods of low occupancy
- Wall mount or add duct mount accessory



C02-W
Wall Mount



C02-D
Duct Mount

IAQ SENSORS

- Measures TVOC
- Direct correlation to CO2 levels
- 0-2000 ppm CO2 equivalent output signal
- Digital display on wall mount
- Selectable 0-5 or 0-10V dc signal
- 24 VAC power required
- Internal menu for easy set-up



IAQ-W
Wall Mount



IAQ-D
Duct Mount

MOTION OCCUPANCY SENSORS

- Passive infrared sensor
- Adjustable time-off delay to 30 minutes
- 24 VAC power requirement
- Ceiling mount or directable wall mount
- Coverage floor space
 - Ceiling mount: 1500 sq. ft.
 - Wall mount: 2500 sq. ft.
- Major motion area
 - Ceiling mount: 50 ft. diameter
 - Wall mount: 68 x 50 ft.



MC-C
Ceiling Mount



MC-W
Wall Mount

Specifications may be subject to change without notice.

ACCESSORIES

See individual submittal pages for availability by model.

Filters

MERV13 FILTERS (SL ONLY)

- ♦ Pleated filter with beverage board fitted frame for OA airstream



MERV13 Filter

Mounting

WALL BRACKET KIT (SL ONLY)

- ♦ For vertical installation on stud walls or field-supplied support/backing panels




Wall Bracket Kit

Paint

EXTERIOR PAINT

- ♦ Custom colors available



Painted Cabinet



Specifications may be subject to change without notice.

ACCESSORIES

See individual submittal pages for availability by model.

Hoods and Dampers

VB106 & VW106

- ◆ 6" vinyl wall caps
- ◆ Brown (VB) or white (VW)
- ◆ Low pressure drop design
- ◆ Cleanable metal screen



VT8

- ◆ 8" vinyl weatherhood
- ◆ Taupe
- ◆ 1-1/2" channel for siding
- ◆ 4 removeable flaps
- ◆ 1/4" plastic screen




FA8-G

- ◆ 8" wall cap
- ◆ Galvanized finish
- ◆ Hood type wall cap
- ◆ 1/4" metal screen



FA8-P

- ◆ 8" wall cap
- ◆ Galvanneal finish
- ◆ Paintable
- ◆ 1/4" metal screen



VW12X8

- ◆ 12" x 8" x 8" round louver
- ◆ Galvanized finish
- ◆ Flush mount
- ◆ 1/2" metal screen



BD6 & BD8

- ◆ 6" & 8" backdraft damper
- ◆ Mechanical "butterfly" design
- ◆ Male/female ends




Specifications may be subject to change without notice.

ACCESSORIES

RH Series Electric Duct Heater

AVAILABLE ON SINGLE/MULTI-FAMILY AND LIGHT COMMERCIAL UNITS (SOME EXCEPTIONS APPLY)

RenewAire offers the highest-efficiency energy recovery ventilators (ERVs) on the market. However, during winter conditions, supply air from the ERV may be less than optimal for space conditions. By adding **RENEWAIRE'S ROUND ELECTRIC DUCT HEATER** as an option to our single/multi-family and light commercial ERVs, RenewAire can now heat supply air during cooler months to enhance indoor comfort, all via one package for ERVs and heaters from a single source.

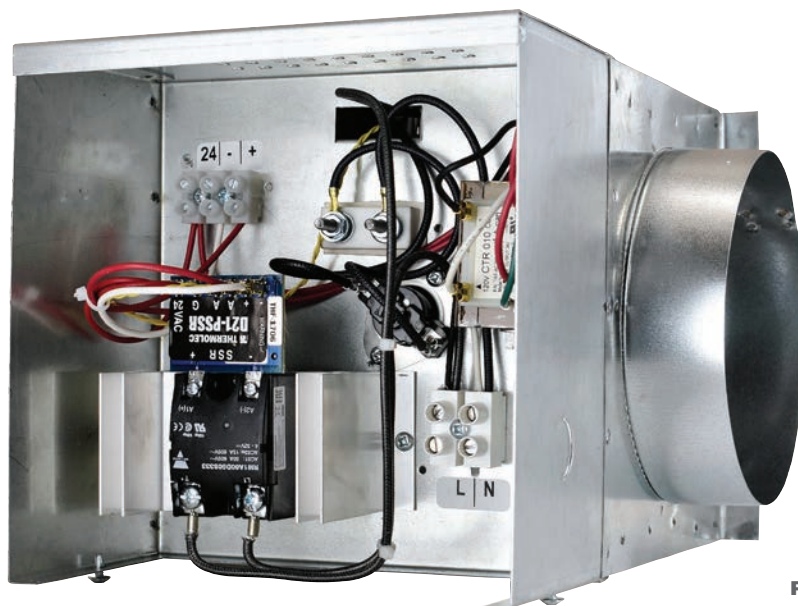

RH SERIES
RH-W SHOWN

KEY BENEFITS

- ◆ **A single source reduces time and costs:** A single information source, a single purchase point and a single approval package for ERVs and heaters reduces design time and costs, and streamlines logistics for design engineers and contractors.
- ◆ **More flexibility:** RenewAire offers design engineers the capacity to specify ERVs with a matching heater to boost flexibility and provide heated air to a single space or multiple spaces.
- ◆ **Easy installation:** A ZERO clearance rating to combustibles allows designers and contractors to apply RenewAire heaters with less restrictions onsite.
- ◆ **Ultimate reliability:** RenewAire heaters come with our two-year warranty and unmatched reliability. Single-source responsibility offers contractors and end users peace of mind and a single call location for technical, start-up and commissioning questions.
- ◆ **Highly certified:** CSA certified and evaluated to the applicable ANSI/UL and CSA Standards, for use in the U.S. and Canada.

Specifications may be subject to change without notice.



RH SERIES

ELECTRIC DUCT HEATER **NEW**

Electric Duct Heater (1-11.5 kW) Accessory

SPECIFICATIONS



RH-D (Integral Thermostat)



RH-W (Wall Mount Thermostat)

Heater Type:
Electric Duct Heater

Typical KW Range:
1-11.5 kW (1, 2, 3, 4, 5, 6, 8, 10, 11.5 kW)

Voltages & Phase:
Single phase - 120, 208 and 240V


Control Voltage:
24 VAC

Standard Features:
Open-coil element
High grade nickel-chrome element wire
Thermostat - Integral (RH-D),
Wall mount (RH-W)
Modulating heat output (SCR control)
Vertical or horizontal operation
Automatic limit switch for primary
over-temperature protection
Manual reset limit switch for secondary
over-temperature protection
Airflow sensor
Standard control transformer - 24 VAC
Corrosion resistant galvanized steel
Round duct collars
High voltage terminal block connections
Grounding lug
Mounting flanges

Note: Electric duct heater designed for indoor ductwork installation only.

Duct Collars	kW	V	Size	Width (X)	Height (Y)	Depth (Z)
6"	1, 2	120, 208, 240	A	11 1/2"	8"	11 1/2"
8"	3, 4, 5	208	B	11 1/2"	10"	13 1/2"
8"	3, 4, 5, 6	240	B	11 1/2"	10"	13 1/2"
10"	3, 4, 5	208	B	11 1/2"	10"	13 1/2"
10"	3, 4, 5, 6	240	B	11 1/2"	10"	13 1/2"
10"	8, 10, 11.5	240	C	15 1/2"	12"	15 1/2"
12"	6, 8, 10, 11.5	240	C	15 1/2"	12"	15 1/2"


Download specification at:
renewaire.com/specifications

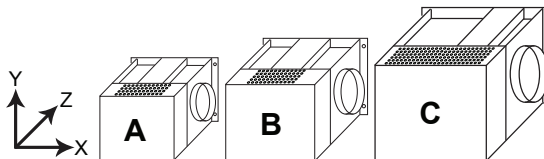

DIMENSIONS IN INCHES

SIZE	X	Y	Z
A	11.5	8.0	11.5
B	11.5	10.0	13.5
C	15.5	12.0	15.5

Minimum Airflow (CFM)	Heater Capacity (kW)
30	1.00
60	2.00
90	3.00
120	4.00
150	5.00
180	6.00
240	8.00
300	10.00
345	11.50

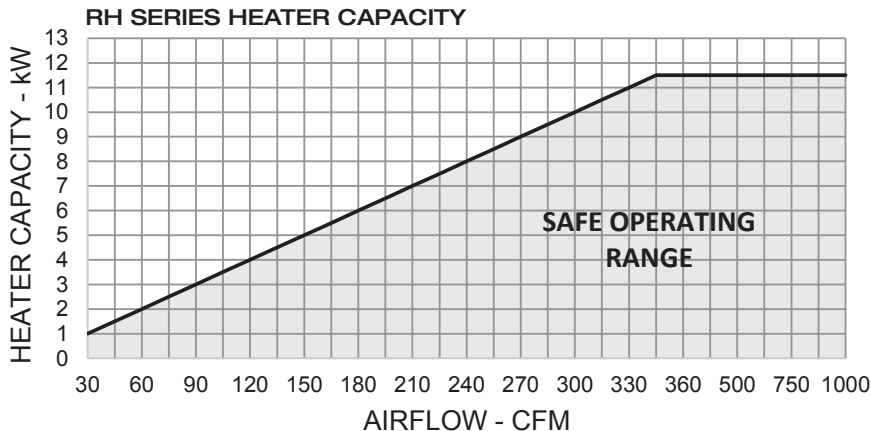

Specifications may be subject to change without notice.

HVI TESTED/CERTIFIED

PER CSA C439



BR130 - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
Pa	in. wg	L/S	CFM	Supply		Exhaust	
				L/S	CFM	L/S	CFM
25	0.1	70	148	71	151	75	159
50	0.2	66	141	67	143	69	147
75	0.3	62	132	63	134	64	135
100	0.4	53	113	54	115	56	119
125	0.5	44	94	45	96	47	99
150	0.6	32	69	33	70	29	62
175	0.7	24	52	25	53	21	45

EV90/GR90 - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
Pa	in. wg	L/S	CFM	Supply		Exhaust	
				L/S	CFM	L/S	CFM
25	0.1	53	113	54	115	52	109
50	0.2	46	98	47	100	46	97
75	0.3	40	85	41	87	40	85
100	0.4	34	73	35	74	34	72
125	0.5	27	58	28	59	28	60
150	0.6	19	40	19	41	22	47

EV90P - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
Pa	in. wg	L/S	CFM	Supply		Exhaust	
				L/S	CFM	L/S	CFM
25	0.1	51	108	52	110	52	110
50	0.2	47	99	48	101	47	100
75	0.3	41	87	42	89	42	89
100	0.4	35	73	36	75	36	76
125	0.5	26	56	27	57	27	58
150	0.6	20	42	20	42	21	44

EV130 - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
Pa	in. wg	L/S	CFM	Supply		Exhaust	
				L/S	CFM	L/S	CFM
25	0.1	77	165	79	168	79	168
50	0.2	72	153	73	156	73	156
75	0.3	64	137	66	140	66	140
100	0.4	59	126	61	129	61	129
125	0.5	49	104	50	106	50	106
150	0.6	37	79	38	81	38	81

EV200 - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
Pa	in. wg	L/S	CFM	Supply		Exhaust	
				L/S	CFM	L/S	CFM
25	0.1	97	207	100	213	109	232
50	0.2	90	192	93	199	104	221
75	0.3	88	186	90	192	101	216
100	0.4	83	176	85	181	96	204
125	0.5	79	168	81	173	88	187
150	0.6	70	149	72	154	76	162
175	0.7	57	122	59	126	68	145

EV240 - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
Pa	in. wg	L/S	CFM	Supply		Exhaust	
				L/S	CFM	L/S	CFM
25	0.1	125	265	129	273	132	280
50	0.2	121	256	124	263	126	267
75	0.3	118	250	120	254	121	256
100	0.4	114	242	116	246	117	248
125	0.5	108	229	111	235	110	233
150	0.6	101	214	103	218	102	216
175	0.7	92	195	94	199	93	197
200	0.8	80	170	82	174	79	167

EV300 - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
Pa	in. wg	L/S	CFM	Supply		Exhaust	
				L/S	CFM	L/S	CFM
100	0.4	147	311	150	317	143	303
125	0.5	139	295	142	301	133	283
150	0.6	131	277	133	282	125	265
175	0.7	121	256	123	261	108	230
200	0.8	101	215	103	219	94	198
225	0.9	90	191	92	195	74	156
250	1.0	80	170	82	174	47	99

SL70L/SL70H - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
Pa	in. wg	L/S	CFM	Supply		Exhaust	
				L/S	CFM	L/S	CFM
25	0.1	51	108	53	112	55	117
50	0.2	48	102	50	106	53	112
75	0.3	45	95	48	102	51	108
100	0.4	43	91	46	97	49	104
125	0.5	42	89	44	93	47	100
150	0.6	40	85	42	89	44	93
175	0.7	38	81	40	85	42	89
200	0.8	36	76	38	81	39	83
225	0.9	33	70	35	74	35	74
250	1.0	29	61	31	66	31	66

BR130 - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	58	124	121	72	78	55
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	59	126	121	46	48	

EV90/GR90 - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	42	90	46	72	77	37
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	42	90	44	46	48	

EV90P - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	42	90	44	80	83	64
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	42	90	44	63	71	

EV130 - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	61	130	102	71	75	53
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	61	130	102	48	51	

EV200 - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	85	181	157	78	84	62
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	85	180	155	52	54	

EV240 - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	111	236	216	75	80	57
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	108	229	213	53	56	

EV300 - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	139	297	315	67	73	54
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	138	294	313	46	49	

SL70L/SL70H - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	25	53	29	75	79	57
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	25	53	31	62	64	



INDEPENDENTLY TESTED

PER CSA C439

BR70 - Ventilation Performance							
Ext. Static Pressure		Net Supply Airflow		Gross Airflow			
				Supply		Exhaust	
Pa	in. wg	L/S	CFM	L/S	CFM	L/S	CFM
25	0.1	41	86	42	89	46	97
50	0.2	34	73	35	75	39	84
75	0.3	28	59	29	61	32	69
100	0.4	21	46	22	47	25	53

Electrical Requirements Volts 120 Amps 1.0

BR70 - Energy Performance							
Supply Temperature		Net Airflow		Average Power Watts	Sensible Recovery Efficiency %	Adjusted Sensible Recovery Efficiency %	Net Moisture Transfer %
C°	F°	L/S	CFM				
Heating							
0°	32°	32	69	94	66	75	53
Cooling					Total Recovery Efficiency %	Adjusted Total Recovery Efficiency %	
35°	95°	30	64	94	42	47	

RENEWAIRE ERVs

VENTILATION SOLUTIONS FOR EVERY APPLICATION




SL SERIES

- ◆ Residential ERVs—four-duct design
- ◆ Indoor
- ◆ 51-76 CFM continuous mode
- ◆ 76-94 CFM boost mode




BR SERIES

- ◆ Residential ERVs—two-duct design
- ◆ Indoor
- ◆ 40-140 CFM



EV SERIES

- ◆ Residential and light commercial ERVs—four-duct design
- ◆ Indoor/outdoor (varies by model)
- ◆ 40-540 CFM



HE SERIES

- ◆ Commercial ERVs—packaged solutions
- ◆ Indoor/outdoor
- ◆ 250-7,950 CFM



LE SERIES

- ◆ Commercial ERVs—large capacity
- ◆ Indoor/outdoor
- ◆ 1,500-11,000 CFM



FOR CERTIFICATION DETAILS SEE UNIT SUBMITTALS ON RENEWAIRE.COM

RENEWAIRE ERVs

VENTILATION SOLUTIONS FOR EVERY APPLICATION




CA SERIES

- ◆ Applied ERVs—modular cabinets
- ◆ Indoor/outdoor
- ◆ 500-4,400 CFM
- ◆ Stackable to 20,000 CFM



PA SERIES

- ◆ Applied ERVs—modular panels
- ◆ Indoor
- ◆ 1500-unlimited CFM

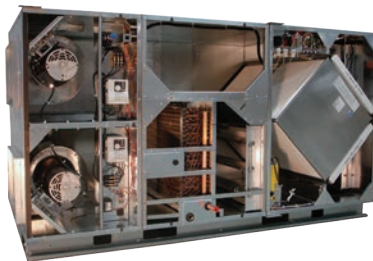

RD SERIES

- ◆ Commercial—Dedicated Outdoor Air System (DOAS)
- ◆ Indoor/outdoor
- ◆ 500-4,250 CFM



DN SERIES

- ◆ Commercial—Dedicated Outdoor Air System (DOAS)
- ◆ Indoor/outdoor
- ◆ 375-4,950 CFM



OPTIONS & ACCESSORIES

- ◆ ECM motors
- ◆ Variable frequency drives
- ◆ Motorized isolation dampers
- ◆ Combo curbs
- ◆ Bypass economizers
- ◆ Electric duct heaters
- ◆ Filter alarms



FOR CERTIFICATION DETAILS SEE UNIT SUBMITTALS ON RENEWAIRE.COM

INDOOR AIR QUALITY MATTERS

- ◆ **Deficient IAQ** is an EPA **top-five** health risk
- ◆ People spend **90%** of their **time indoors**
- ◆ **Indoor air** can be 2-5 times and up to 100 times **more polluted than outdoor air**

BENEFITS OF INCREASED VENTILATION



TECHNICAL/APPLICATIONS SUPPORT

The goal of our technical-support team is to provide the **BEST CUSTOMER SERVICE** in the HVAC industry. You can count on our knowledgeable and seasoned staff for all your technical, application and service needs, and we'll respond quickly and effectively to answer any of your questions.

CONTACT RENEWAIRE



PHONE:
1.800.627.4499
FAX:
608.221.2824



FOR TECHNICAL SUPPORT:
RenewaيرةSupport@renewaيرة.com
TO PLACE AN ORDER:
RenewaيرةOrders@renewaيرة.com

RELEVANT EVERYWHERE

EVERY GEOGRAPHIC REGION

Our ERVs function perfectly across the world in every geographic region.

EVERY CLIMATE

Our ERVs operate in every climate—from Alaska to Florida, and everywhere in between.

EVERY PROJECT

From massive skyscrapers to cozy residential homes, our ERVs can be used in every size project and in every code jurisdiction.

RENEWAIRE
TEMPERS THE AIR



Our ERVs moderate the extremes of outdoor supply-air temperature and humidity year-round, providing a sustainable solution for fresh air that feels like a perfect spring day.

APPLIED EVERYWHERE

When indoor occupants breathe in unclean air, this harms their health and causes cognitive impairment. Our ERVs can provide cleaner and healthier indoor air for every type of building in the world, thus improving occupants' wellbeing, while also reducing energy costs.

RESIDENTIAL

The increased airtightness of newer and remodeled homes is causing deficient IAQ, resulting in more health problems for indoor occupants.

COMMERCIAL

As commercial buildings become more airtight, deficient IAQ is increasing and causing sickness, absenteeism and decreased productivity.

HEALTHCARE

The high occupant density of hospitals, nursing homes and other healthcare facilities results in deficient IAQ and ensuing health problems for patients and staff alike.

RESTAURANTS/COFFEE SHOPS

The large volume of indoor occupants in restaurants and coffee shops causes deficient IAQ and subsequent health problems.

RETAIL

The high level of foot traffic in retail stores leads to deficient IAQ and the potential sickness of shoppers, which can negatively impact sales.

DAYCARE

Crowded daycare facilities breed deficient IAQ, thus causing health problems for everyone—especially children who are more vulnerable.

EDUCATION (LOWER AND HIGHER)

With students and teachers packed into tight classrooms, instances of deficient IAQ go up, resulting in academic performance and test scores going down.




GOVERNMENT

Aging and crowded government buildings result in deficient IAQ, which can impair worker performance and productivity.

EVERY TYPE OF BUILDING

Every type of building can benefit from the enhanced IAQ generated by RenewAire ERVs, including veterinary clinics, nail salons and manufacturing facilities, among others.



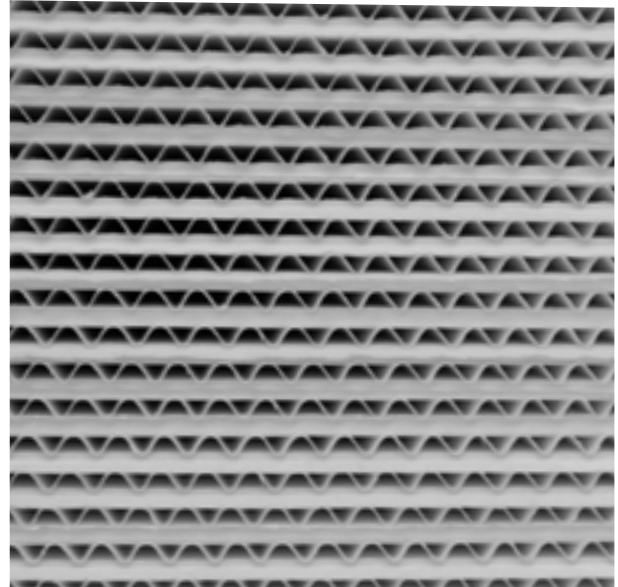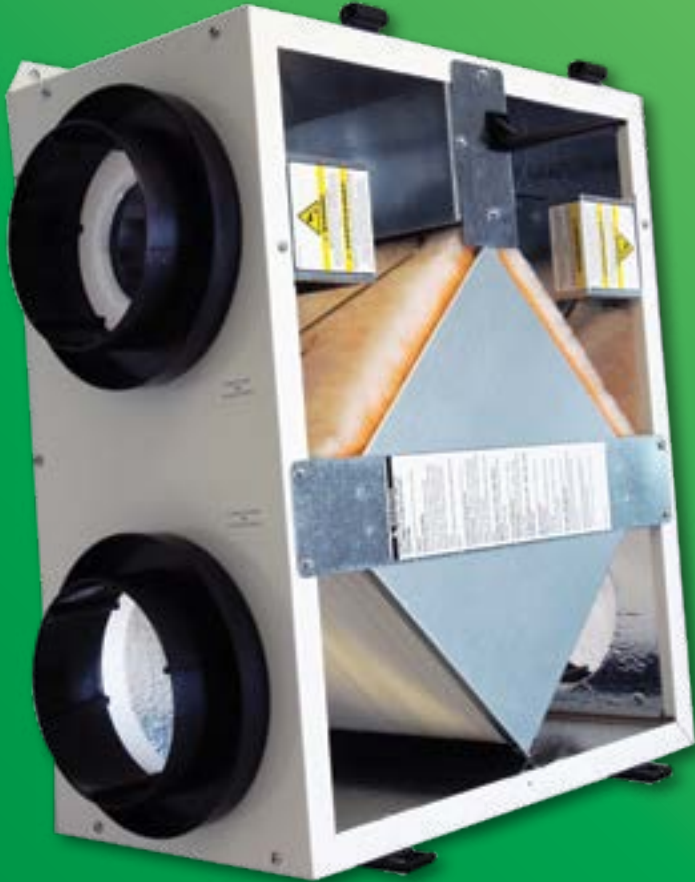

RENEWAIRE EVERYWHERE

RenewAire ERVs can be applied everywhere across all commercial, educational, institutional, light industrial and residential buildings. Our technology excels in every geographic region, every climate, and every size project.

