



# Disconnects

## EAT•N - Molded Case Switch Disconnect

- Operates the same as a light switch
- Plug-in molded case switch eliminates the need for pullout handles
- No need for replacement pullout handles due to loss or theft



| Global No.       | Eaton No. | Main Amp Rating | Wire Size Range<br>Cu/Al 60°C or 75°C | Max Hp Rating |      | Case Qty |
|------------------|-----------|-----------------|---------------------------------------|---------------|------|----------|
|                  |           |                 |                                       | 120V          | 240V |          |
| Galvanized Steel |           |                 |                                       |               |      |          |
| 8068             | DPB222R   | 60A             | #14-3                                 | —             | 10   | 10       |
| 80643P           | DPU362RA  | 60A             | #14-4                                 | 15            | 30   | 10       |

## EAT•N - A/C Disconnect w/ GFI Receptacle

- 60Amp, 240V, Non-Fused & 30Amp, Fused
- NEMA 3R enclosure
- Built-in 100V ground fault receptacle
- Rotating receptacle for easy wiring
- Complies with 2000 NEC #210.63, 210.8, and 406.8
- Code requires a 15Amp receptacle be installed within 25 feet of HVACR equipment




| Global No.      | Eaton No.   | Main Amp Rating | Wire Size Range<br>Cu/Al 60°C or 75°C | Max Hp Rating |      | Case Qty |
|-----------------|-------------|-----------------|---------------------------------------|---------------|------|----------|
|                 |             |                 |                                       | 120V          | 240V |          |
| Galanized Steel |             |                 |                                       |               |      |          |
| 8062GFI         | DPF221RGF15 | 30A             | #14-3                                 | 2             | 3    | 10       |
| Non-Metallic    |             |                 |                                       |               |      |          |
| 8064GFI         | DPU222RGF15 | 60A             | #14-3                                 | —             | 10   | 10       |



## EATON - Fused Pullouts


- Standard pullout when fused protection is required
- On/Off control provided by a pullout handle
- Pullout handle can be conveniently stored in the compartment in the OFF position, helping prevent the handle from being misplaced
- Protective shield cannot be removed until the pullout handle is removed, disconnecting the power

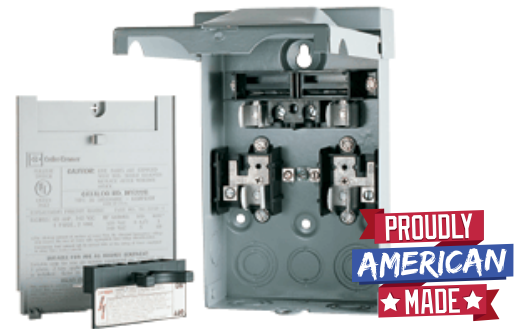

| Global No.      | Eaton No.    | Main Amp Rating | Wire Size Range<br>Cu/Al 60°C or 75°C | Max Hp Rating |      | Case Qty |
|-----------------|--------------|-----------------|---------------------------------------|---------------|------|----------|
|                 |              |                 |                                       | 120V          | 240V |          |
| Galanized Steel |              |                 |                                       |               |      |          |
| 8062            | DPF221R      | 30A             | #14-3                                 | 2             | 3    | 10       |
| 8063            | DPF222R      | 60A             | #14-3                                 | 3             | 10   | 10       |
| Non-Metallic    |              |                 |                                       |               |      |          |
| 8062NM          | ACD221RNM-A2 | 30A             | #14-2                                 | 2             | 3    | 10       |
| 8063NM          | ACD222RNM-A2 | 60A             | #14-2                                 | 3             | 10   | 10       |

## EATON - Non-Fused Pullouts

- Standard pullout when fused protection is not required
- On/Off control provided by a pullout handle
- Pullout handle can be conveniently stored in the compartment in the OFF position, helping prevent the handle from being misplaced
- Protective shield cannot be removed until the pullout handle is removed, disconnecting the power

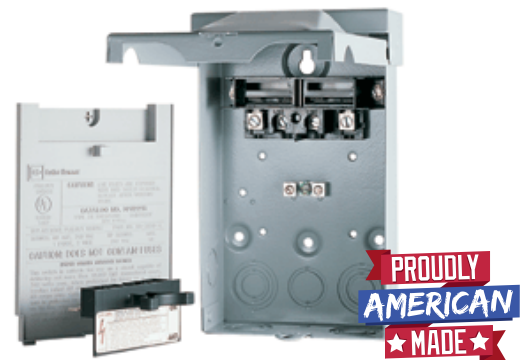

| Global No.      | Eaton No.     | Main Amp Rating | Wire Size Range<br>Cu/Al 60°C or 75°C | Max Hp Rating |      | Case Qty |
|-----------------|---------------|-----------------|---------------------------------------|---------------|------|----------|
|                 |               |                 |                                       | 120V          | 240V |          |
| Galanized Steel |               |                 |                                       |               |      |          |
| 8064            | DPU222R       | 60A             | #14-3                                 | —             | 10   | 10       |
| Non-Metallic    |               |                 |                                       |               |      |          |
| 8064NM          | ACD222URNM-A2 | 60A             | #14-3                                 | —             | 10   | 10       |



# Disconnect/Pullout Cross Reference

## Disconnect/Pullout Cross Reference

| Description                                    | Global   | Eaton           | Square D* | GE*       | Siemens®<br>(Murray®) | Milbank     | Midwest  |
|------------------------------------------------|----------|-----------------|-----------|-----------|-----------------------|-------------|----------|
| Metallic/Galvanized Steel Enclosure            |          |                 |           |           |                       |             |          |
| 30A fused                                      | 8062     | DPF221R         |           | TF30R     | WF2030                | U3830       | U035F2   |
| 60A fused                                      | 8063     | DPF222R         |           | TR60R     | WF2060                | U3860       | U065F1   |
| 60A non-fused                                  | 8064     | DPU222R         |           | TRN60R    |                       | U3800       | U065P010 |
| 60A non-fused compact design                   |          | DPU222R         |           |           | WNFC2060              |             |          |
| 60A molded case switch                         | 8068     | DPB222R         | Q0200TR   | TNA60R1   | WNAS2060              |             | U065NA1  |
| 60A non-fused with ground fault receptacle     |          | DPU222RGF       |           | TFN60RGFR | WN2060GFCI            | U3822-20GR  | U065P010 |
| 30A fused with ground fault receptacle         | 8062GFI  | DPF221RGF       |           |           | WF2030GFCI            |             | U035F010 |
| 60A fused with ground fault receptacle         |          | DPF222RGF       |           |           | WF2060GFCI            |             | U065F010 |
| 60A non-fused with 1/2-inch wire harness       |          | DPU222R12W      |           |           |                       |             |          |
| 60A non-fused with 3/4-inch wire harness       |          | DPU222R34W      |           |           |                       |             |          |
| 60A three-phase 600V molded case switch        | 80643P   | DPU362RA        |           |           |                       |             | U0653F   |
| Non-Metallic/Polycarbonate Enclosure           |          |                 |           |           |                       |             |          |
| 30A fused                                      | 8062NM   | ACD221RNM-A2    |           | TPF30R    | WF2030PL              |             | P035F    |
| 60A fused                                      | 8063NM   | ACD222RNM-A2    |           | TPF60R    | WF2060PL              |             | P065F    |
| 60A non-fused                                  | 8064NM   | ACD222URNM-A2   |           | TPN60R1   | WN2060PL              |             | P065P1   |
| 60A molded case switch                         | B60NARNM | B60NARNM-A2     | Q0200TRNM | TPNA60R1  | WNAS2060PL            |             | P065NA1  |
| 30A fused with 15A ground fault receptacle     |          | DPF221RGF15WRTR |           |           |                       |             |          |
| 30A fused with 20A ground fault receptacle     |          | DPF221RGF20WRTR |           |           |                       |             |          |
| 60A fused with 15A ground fault receptacle     |          | DPF222RGF15WRTR |           |           |                       |             |          |
| 60A fused with 20A ground fault receptacle     |          | DPF222RGF20WRTR |           |           |                       |             |          |
| 60A non-fused with 15A ground fault receptacle | 8064GFI  | DPU222RGF15WRTR |           |           |                       |             |          |
| 60A non-fused with 20A ground fault receptacle |          | DPU222RGF20WRTR |           |           |                       | U3822-20GWR |          |



# Disconnects/Pullouts

## Disconnect/Pullout Dimensions - Dimensions in inches (mm)

| Global                               | Eaton           | Height        | Width         | Depth        | Weight lbs (kg) |
|--------------------------------------|-----------------|---------------|---------------|--------------|-----------------|
| Metallic/Galvanized Steel Enclosure  |                 |               |               |              |                 |
| 8062                                 | DPF221R         | 8.70 (220.9)  | 5.40 (137.2)  | 3.15 (80.0)  | 27 (12)         |
| 8063                                 | DPF222R         | 8.70 (220.9)  | 5.40 (137.2)  | 3.15 (80.0)  | 27 (12)         |
| 8064                                 | DPU222R         | 8.70 (220.9)  | 5.40 (137.2)  | 3.15 (80.0)  | 27 (12)         |
| 8068                                 | DPB222R         | 8.60 (218.4)  | 5.30 (134.6)  | 3.74 (95.0)  | 34 (15)         |
|                                      | DPU222R12W*     | 14.75 (374.6) | 12.50 (317.5) | 4.00 (101.6) | 34 (15)         |
|                                      | DPU222R34W*     | 14.75 (374.6) | 12.50 (317.5) | 4.00 (101.6) | 8 (4)           |
|                                      | DPU222RGF20     | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPF221RGF20     | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPF222RGF20     | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPU222RGF15     | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
| 8062GFI                              | DPF221RGF15     | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPF222RGF15     | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPF221RGF15WRTR | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPF221RGF20WRTR | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPF222RGF15WRTR | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPF222RGF20WRTR | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPU222RGF15WRTR | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
|                                      | DPU222RGF20WRTR | 13.00 (330.2) | 7.50 (190.5)  | 4.75 (120.7) | 8 (4)           |
| 80643P                               | DPU632R         | 8.60 (218.4)  | 5.30 (134.6)  | 3.74 (94.9)  | 4 (2)           |
| Non-Metallic/Polycarbonate Enclosure |                 |               |               |              |                 |
| 8062NM                               | ACD221RNM-A2    | 8.63 (219.0)  | 6.26 (159.0)  | 4.33 (109.9) | 15 (7)          |
| 8063NM                               | ACD222RNM-A2    | 8.63 (219.0)  | 6.26 (159.0)  | 4.33 (109.9) | 15 (7)          |
| 8064NM                               | ACD222URNM-A2   | 8.63 (219.0)  | 6.26 (159.0)  | 4.33 (109.9) | 15 (7)          |
| B60NARNM                             | B60NARNM-A2     | 8.63 (219.0)  | 6.26 (159.0)  | 4.33 (109.9) | 18 (8)          |

### Note

\* = Eaton Quick Pro designated item




# Disconnects/Pullouts

## Disconnect/Pullout Dimensions

Approximate Dimensions in Inches (mm)

DPF221R, DPF222R, DPU222R, DPU222R12W, DPU222R34W

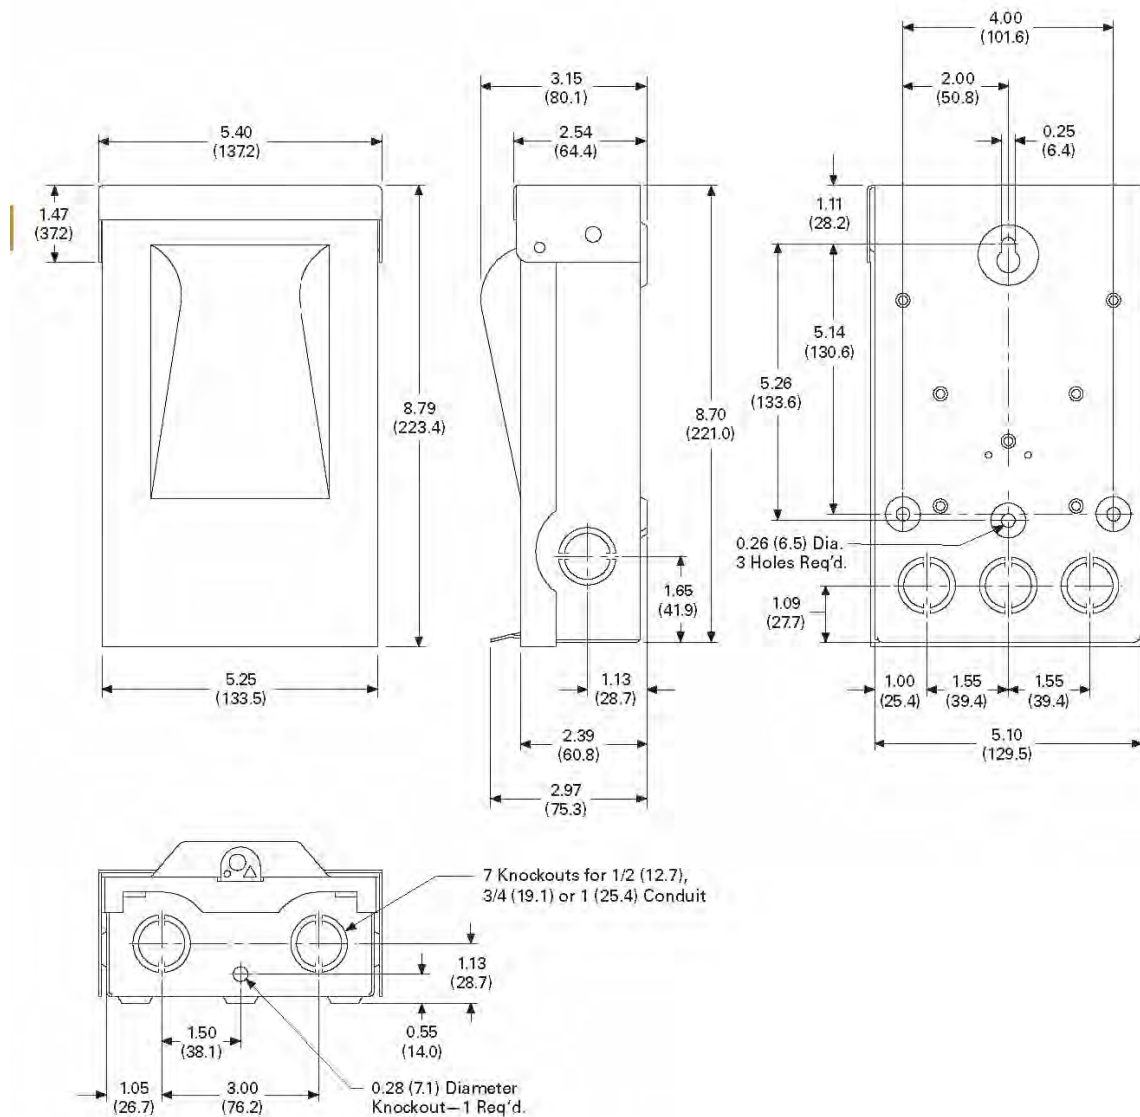




# Disconnects/Pullouts


## Disconnect/Pullout Dimensions

Approximate Dimensions in Inches (mm)

**ACD221RNM-A2, ACD222RNM-A2, ACD222URNM-A2, B60NARNM-A2  
DPB222R and DPU632A**

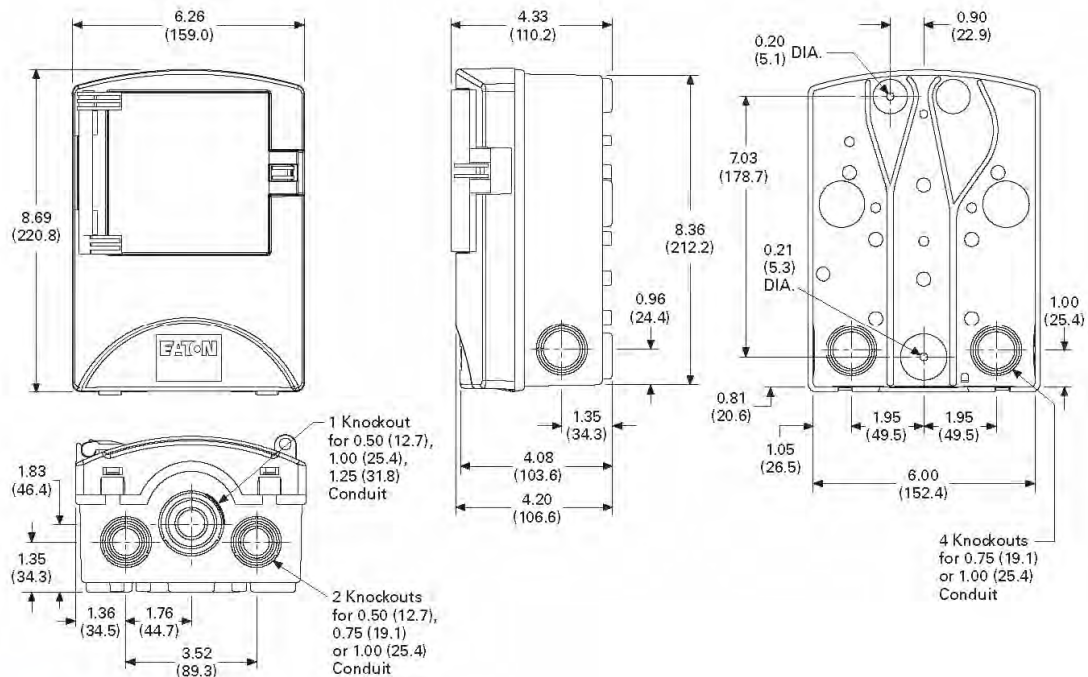

**DPB222R and DPU362A**

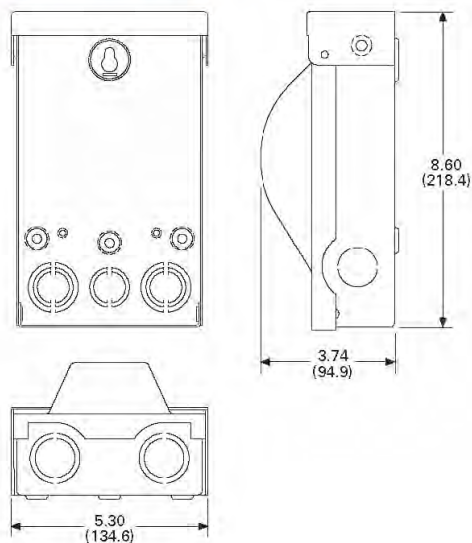



## Disconnect/Pullout Dimensions

Approximate Dimensions in Inches (mm)

**DPU222RGF20, DPF221RGF20, DPF222RGF20, DPU222RGF15, DPF221RGF15,  
DPF222RGF15, DPF221RGF15WRTR, DPF221RGF20WRTR, DPF222RGF15WRTR,  
DPF222RGF20WRTR, DPU222RGF15WRTR, DPU222RGF20WRTR**

