




LIGHTING FIXTURE COMPANY

ASSEMBLY AND INSTALLATION INSTRUCTIONS for the **4452/4453** Fixture

Important Safety information (Please read before proceeding)

1. Remove the fixture, parts and all mounting hardware bags (orange) from the carton and verify that all parts are present according to the illustration sheet. All parts must be used as indicated. Do not replace any parts, leave any parts out, or use any parts which are worn out or broken. **Failure to follow the instructions could cause a hazardous situation, voids the warranty and violates the U.L. listing of the fixture.**
2. To prevent the electric shock, turn off the main power at the circuit breaker before installing the fixture. **NEVER attempt to install, clean or replace bulbs without shutting off the electricity to the fixture.**
3. **Never use light bulbs with wattage ratings that exceed the fixtures maximum rating.** Always make sure the electric current is turned off before changing the bulbs.
4. If you experience difficulties installing the lighting fixture or it fails to work as expected, please contact a local qualified licensed electrical contractor.
5. Please contact your local Capital Lighting Fixture reseller with any assembly or installation questions. Your local reseller can also provide you with replacement parts for your new fixture.

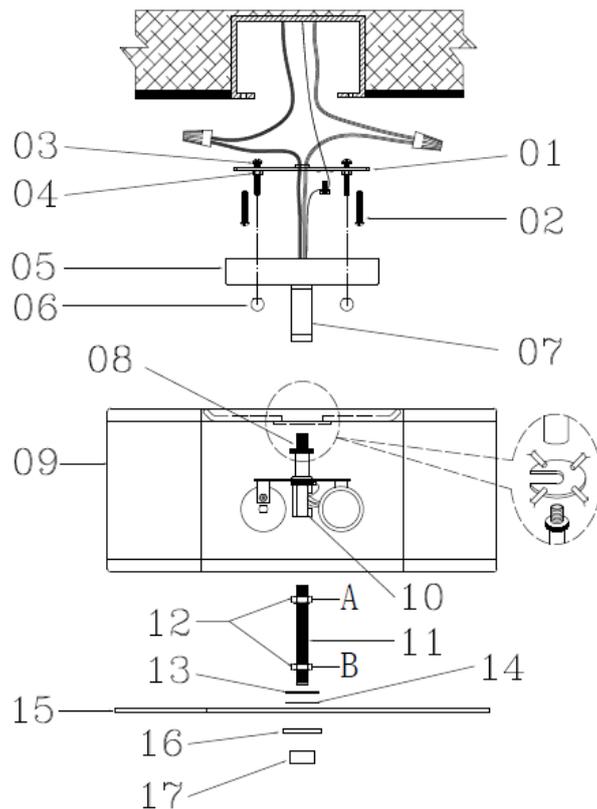

Components

01. Mounting Bar
02. Outlet Box Mounting Screws
03. Mounting Screws
04. Hex Nuts (8/32)
05. Canopy
06. Ball Knobs
07. Tube
08. Light Cluster
09. Fabric Shade
10. Hickey
11. Nipple
12. Hex Nuts
13. Flat Washer
14. Rubber Washer
15. Glass Diffuser
16. Acrylic Washer
17. Finial

Assembly Instructions for the 4452/4453 Fixture:

1. Raise Fabric Shade (09) over Light Cluster (08), then secure it with Tube (07).
2. Screw Nipple (11) with Hex Nut (12-A) onto Hickey (10), then place Flat Washer (13) and Rubber Washer (14), Glass Diffuser (15), Acrylic Washer (16) over end of Nipple (11), after that, secure all with Final (17). Note: If Glass Diffuser (15) is not in same location to match Shade Bottom Edge (09), please remove Glass Diffuser (15) and adjust Hex Nut (12-B) in proper position to achieve it; meanwhile, the bigger center hole of Glass Diffuser (15) would be helpful for Glass Diffuser (15) and Fabric Shade (09) assembly in line.
3. Find appropriate threaded holes on Mounting Bar (01), and assemble Mounting Screws (03) into threaded holes with Hex Nuts (04).
4. Attach Mounting Bar (01) to Outlet Box with Outlet Box Mounting Screws (02).
5. Connect fixture ground wire to outlet box ground wire with wire connector supplied; connect white fixture wire to power supply white wire with wire connector supplied; connect black fixture wire to power supply black wire with wire connector supplied.
6. Push fixture to ceiling, carefully passing Mounting Screws (03) through holes in Canopy (05), then verify all wires are securely inside Canopy (05). Finally, secure fixture to ceiling with Ball Knobs (06).