



ECO-VALVE

Figure # 5015AB

Low Lead DZR Brass Pex End Ball Valve

Product Features


- 400# WOG
- Brass Body
- Regular Port
- PEX Barb Ends
- O-Ring Packing
- Chrome Plated Ball
- Blow-Out Proof Stem
- ASTM F1960
- NSF61-G Certified



Pressure/Temperature Rating	
400 PSI from 15°F to 160°F	150 PSI MAX at 200°F



Materials & Specifications

Item	Description	Material	Specification
1	Body	Low Lead DZR Brass	CW511L
2	End piece	Low Lead DZR Brass	CW511L
3	Ball	Low Lead Brass/Cr Plated	CW511L
4	Seat	PTFE	PTFE
5	Stem	Low Lead DZR Brass	CW511L
6	O-Ring	O-ring NBR	NBR
7	Handle	Dacromet Plated Steel	A36 Dacromet
8	Nut	Zinc Plated Steel	A36

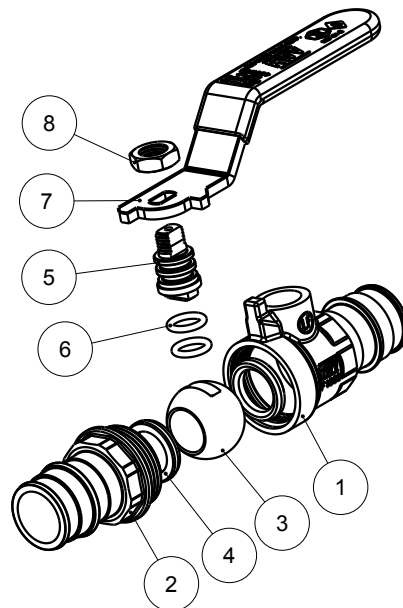

Dimensions, Weights (inches-lbs.) & Valve Data

Size	3/8	1/2	5/8	3/4	1	1-1/4	1-1/2	2
A	2.28	2.48	3.07	3.23	3.86	4.63	5.63	6.67
H	1.38	1.38	1.77	1.77	1.77	2.03	2.24	2.70
L	3.19	3.19	3.58	3.58	3.58	4.96	4.96	5.55
P	0.39	0.39	0.50	0.50	0.73	0.94	1.22	1.46
P1	0.27	0.39	0.50	0.61	0.81	0.96	1.10	1.56
Wt.	0.26	0.27	0.43	0.44	0.67	1.19	1.68	2.80

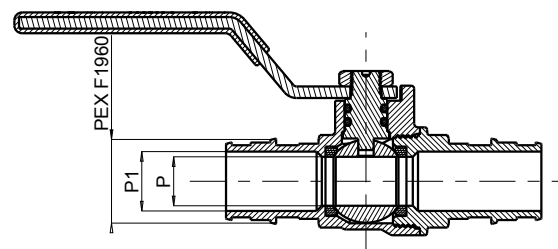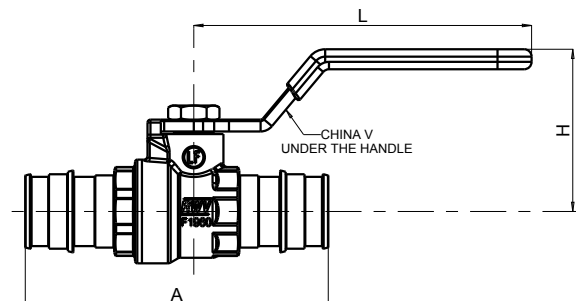

RED-WHITE VALVE CORP.

20600 Regency Lane, Lake Forest, CA 92630

TEL: 949.859.1010 • FAX: 949.859.7200 • www.redwhitevalvecorp.com