


**Class 0, Flexible Air Duct
Aluminum Semi-Rigid
Flexible Duct with
Crimped End**



MODELS	A (DIA.)	B (LENGTH)
A078C/5	7" (17.8 cm)	8' (2.4 m)
A088C/4	8" (20.3 cm)	8' (2.4 m)

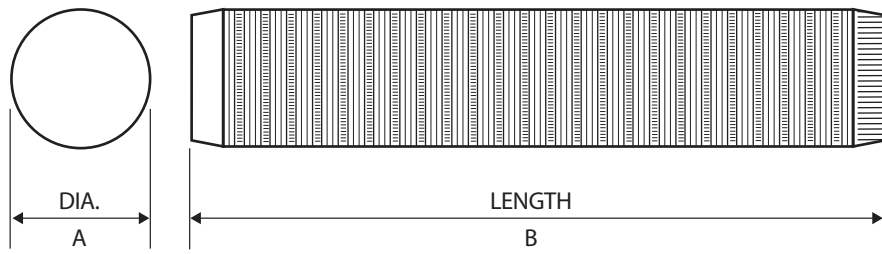

MODEL NO. DESCRIPTION

A078C/5	7" dia. x 8' length (17.8 cm x 2.4 m)
A088C/4	8" dia. x 8' length (20.3 cm x 2.4 m)

GENERAL INFORMATION

- 8 ft. / 2.4 m lengths compressed to 28 in. / 71 cm
- Conveniently crimped on one end for easy attachment
- Material Description: Common name - Aluminum Alloy; Trade name - Aluminum Alloy 3003
- A multiple use product, our semi-rigid flexible ducting can be used for exhaust and bathroom venting, as well as range hoods, etc.

PERFORMANCE DATA

For uninsulated aluminum flexible duct

Maximum Velocity

- 5000FPM / 25MPS

Maximum Rated Pressures

- 3" - 10" dia., 6" W.C. / 1.5 Kpa Pos / Neg

Operating Temperature Range

- -100°F to 430°F, -73°C to 221°C Intermittent

Class 0 Air Duct, Flexible

Flame Spread / Smoke Developed

- 0 / 0