

SPECIFICATIONS

FIGURE 14MPHR - 14MPHT
SANITARY STAINLESS FITTINGS



304 & 316L STAINLESS STEEL HOSE ADAPTER

FNW hose adapters provide a reliable transition between sanitary process connections and flexible hose systems. Manufactured from stainless steel, these adapters are designed for durability, ease of installation, and dependable performance in sanitary applications.

FEATURES

- 304 & 316L available
- Polished ID & OD
- Manufactured from ASTM A-270 stainless steel tubing

PRODUCT SPECIFICATIONS

- Complies with 3-A standards

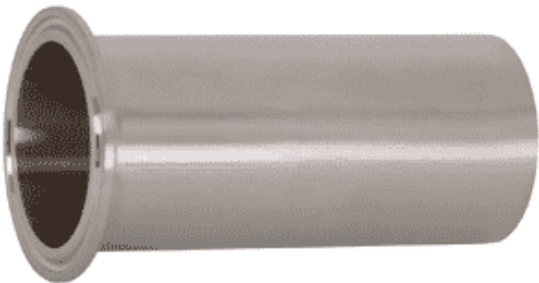


FIGURE NUMBER MATRIX

FNW 14MPHR		
Grade	Size (Tube OD x NPT) (in.)	
304 = 74 316L = 76	1/2 X 3/8 = DC*	1 X 1 = G
	1/2 X 1/2 = D*	1-1/2 X 3/4 = JF
	3/4 X 1/4 = FB*	1-1/2 X 1 = JG
	3/4 X 3/8 = FC*	1-1/2 X 1-1/2 = J
	3/4 X 3/4 = F*	2 X 2 = K
	1 X 3/8 = GC*	2-1/2 X 2-1/2 = L
	1 X 1/2 = GD*	3 X 3 = M
	1 X 3/4 = GF	4 X 4 = P
*not available in 304		

FIGURE NUMBER MATRIX

FNW 14MPHT		
Grade	Size (in.)	
304 = 74 316L = 76	1/2 = D*	2-1/2 = L
	3/4 = F*	3 = M
	1 = G	4 = P
	1-1/2 = J	6 = U
	2 = K	
*not available in 304		

SPECIFICATIONS

FIGURE 14MPHR - 14MPHT


SANITARY STAINLESS FITTINGS



304 & 316L STAINLESS STEEL HOSE ADAPTER

14MPHR - CLAMP RUBBER HOSE ADAPTER

Tube OD (in.)	NPT Size (in.)	Item #		A (in.)	B (in.)	Weight (lbs)
		304	316L			
1/2	3/8	—	FNW14MPHR76DC	1.500	0.400	0.220
1/2	1/2	—	FNW14MPHR76D	1.500	0.500	0.220
3/4	1/4	—	FNW14MPHR76FB	1.500	0.310	0.220
3/4	3/8	—	FNW14MPHR76FC	1.500	0.400	0.220
3/4	3/4	—	FNW14MPHR76F	1.500	0.750	0.220
1	3/8	—	FNW14MPHR76GC	1.500	0.400	0.330
1	1/2	—	FNW14MPHR76GD	1.500	0.500	0.330
1	3/4	FNW14MPHR74GF	FNW14MPHR76GF	1.680	0.750	0.330
1	1	FNW14MPHR74G	FNW14MPHR76G	1.680	1.000	0.330
1-1/2	3/4	FNW14MPHR74JF	FNW14MPHR76JF	1.500	0.750	0.418
1-1/2	1	FNW14MPHR74JG	FNW14MPHR76JG	1.680	1.00	0.418
1-1/2	1-1/2	FNW14MPHR74J	FNW14MPHR76J	1.680	1.500	0.418
2	2	FNW14MPHR74K	FNW14MPHR76K	2.312	1.500	0.594
2-1/2	2-1/2	FNW14MPHR74L	FNW14MPHR76L	2.344	2.500	0.748
3	3	FNW14MPHR74M	FNW14MPHR76M	3.094	3.000	0.946
4	4	FNW14MPHR74P	FNW14MPHR76P	3.406	4.000	1.650



14MPHT - TYGON HOSE ADAPTER

Tube OD (in.)	Item #		A (in.)	B (in.)	C (in.)	Weight (lbs)
	304	316L				
1/2	—	FNW14MPHT76D	4.000	0.370	0.500	0.250
3/4	—	FNW14MPHT76F	4.000	0.620	0.750	0.300
1	FNW14MPHT74G	FNW14MPHT76G	4.500	0.870	1.000	0.380
1-1/2	FNW14MPHT74J	FNW14MPHT76J	4.500	1.370	1.500	0.420
2	FNW14MPHT74K	FNW14MPHT76K	4.500	1.870	2.000	0.580
2-1/2	FNW14MPHT74L	FNW14MPHT76L	4.500	2.370	2.500	0.740
3	FNW14MPHT74M	FNW14MPHT76M	4.500	2.870	3.000	0.920
4	FNW14MPHT74P	FNW14MPHT76P	4.625	3.834	4.000	1.400
6	FNW14MPHT74U	FNW14MPHT76U	6.000	5.782	6.000	6.100

