



# SANITARY STAINLESS SYSTEMS

## 21MP - Male NPT X Clamp Adapter

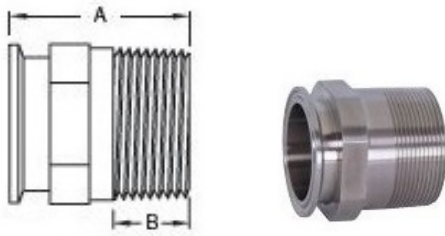

Tube OD (in)	NPT Size (in)	Part Number		A (in)	B (in)	Weight (lb)
		304	316L			
1/2	3/8	–	G21MP76DC	2.000	0.600	0.2156
1/2	1/2	–	G21MP76D	1.625	0.782	0.2332
3/4	1/2	–	G21MP76FD	2.000	0.782	0.2332
3/4	3/4	–	G21MP76F	1.787	0.794	0.2332
1	1/2	–	G21MP76GD	2.187	0.782	0.704
1	1	G21MP74GD	G21MP76G	2.250	0.985	0.704
1	1-1/2	G21MP74GJ	G21MP76GJ	2.438	1.025	0.704
1-1/2	3/4	G21MP74JF	G21MP76JF	2.187	0.794	0.792
1-1/2	1	G21MP74JG	G21MP76JG	2.437	0.985	0.792
1-1/2	1-1/2	G21MP74J	G21MP76J	2.250	1.025	0.792
2	1/2	G21MP74KD	G21MP76KD	2.188	0.782	1.166
2	1	G21MP74KG	G21MP76KG	2.469	0.985	1.166
2	1-1/2	G21MP74KJ	G21MP76KJ	2.625	1.009	1.166
2	2	G21MP74K	G21MP76K	2.638	1.058	1.166
2-1/2	2-1/2	G21MP74L	G21MP76L	2.875	1.571	1.5136
3	3	G21MP74M	G21MP76M	3.070	1.634	2.310
4	4	G21MP74P	G21MP76P	3.155	1.734	3.432

## 22MP - Female NPT X Clamp Adapter

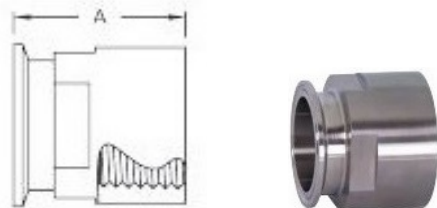

Tube OD (in)	NPT Size (in)	Part Number		A (in)	Weight (lb)
		304	316L		
1/2	1/2	–	G22MP76D	1.500	0.255
3/4	3/4	–	G22MP76F	1.625	0.198
1	1	G22MP74G	G22MP76G	1.625	0.814
1-1/2	1-1/2	G22MP74J	G22MP76J	2.250	1.056
2	2	G22MP74K	G22MP76K	2.406	1.430
2-1/2	2-1/2	G22MP74L	G22MP76L	2.187	1.606
3	3	G22MP74M	G22MP76M	2.187	1.650
4	4	G22MP74P	G22MP76P	3.652	5.126