


Tech Data

Viega Shut-Off Valve - PEX Press



Description


Viega shut-off valves are available in copper (female) x Viega PEX Press and compression. These shut-off valves are commonly used to connect radiant heating, cooling and snow-ice melting tubing to Viega valveless copper manifolds or other copper to PEX Press connections.

Features

- Viega PEX Press connections
- Compact size
- ¼ turn ball valve
- Available individually or pre-assembled on Viega's 1-½" and 2" copper manifolds

Materials

- Brass body
- Plated or coated zinc handles
- Teflon, Viton, EPDM seals

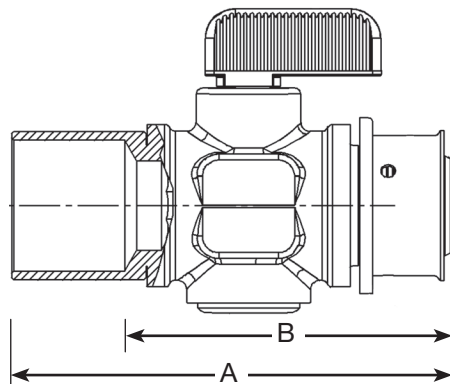

This document is subject to updates. For the most current Viega technical literature please visit www.viega.us.



Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**

Specifications

- Min. Temperature: 36°F
- Max. Temperature: 250°F
- Max. Pressure: 200 psi
- Max. Glycol Mix: 50%

Valve Size (in)	Approximate Cv Rating
½	3.0
⅝	6.0
¾	6.0

Part No.	Valve	Description	A (in)	B (in)
17260	Shut-Off	½" PEX Press x ½" Copper (female)	2.23	1.73
17261	Shut-Off	⅝" PEX Press x ¾" Copper (female)	3.03	2.27
17262	Shut-Off	¾" PEX Press x ¾" Copper (female)	2.95	2.19

> **Viega LLC**
585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-HC 1020 Shut-Off Valve - PEX Press

viega