

Firefighter Owned and Operated





Double Jacket Fire Hose



Single Jacket Fire Hose



Rubber Covered Fire Hose



Fire Hose Fittings




Cam and Groove Fittings



Storz Fire Fittings









Fire Hose Storage



Fire Wrenches

Caps and Plugs

Shipping Hours Monday - Friday Up to 5:00 pm EST

Office Hours Monday - Friday 9:00 to 5:00 pm EST Contact Us Phone: 888-975-0858 Email: sales@firehosedirect.com

HOSE PRODUCTS

NDurance Double Jacket Hose	4, 5
Double Jacket Industrial Hose	6
Double Jacket Mill Hose	6
Single Jacket Hose	7
Single Jacket Mill Hose	7
Rubber Covered Hose	8
Large Diameter Supply Hose	9
Fire Hose Roller	9
Booster Hose	10, 11
Camlock Hose	
Forestry Hose	14
US Coast Guard Hose	15
Discharge Hose	16
Potable Water Hose	
Hard Suction Hose	18-20
Pin Rack Hose	21

ADAPTERS & FITTINGS

Adapter Guide		22
Common Hose Connections		23
Aluminum Adapters and Fittings		
Female to Male	24, 2	25
Male to Male		26
Female to Female		27
Brass Adapters and Fittings		
Female to Male	28, 2	29
Male to Male		30
Female to Female		31
Storz Adapters		32
Specifications		33
Cam & Groove Fittings		
Male Camlock to Female Thread		34
Male Camlock to Male Thread		35
Female Camlock to Male Thread		36
Female Camlock to Female Thread		37
Caps		38
Plugs		38
Fire Hose Thread Camlocks		39
High Pressure Aluminum		39
Male Camlock to Shank	4	40
Female Camlock to Shank	4	40
Aluminum Camlock to Camlock	4	41
Caps, Plugs & FDC Covers		
Threaded Caps	4	42
Storz Caps	4	42
Plugs	4	43
Fire Hydrant Caps	4	43
Fire Department Connection Covers	4	43

ADAPTERS & FITTINGS

Dry Hydrants	
Female	44
Male	44
Storz	44
Caps and Plugs	45
Dry Hydrant Accessories	45
Horizontal Strainers	45
Couplings and Clamps	
Hose Shank Couplings	46
Locking Storz Couplings	46
FDC Elbow Connections	
FDC Replacement Parts	46
Elbow Connections	
Fire Hydrant Flushing Elbows	47
Fire Hydrant Diffuser	47
Female to Male Elbows	47
Flanges	48
Quarter Turn Forestry	
Storz Fire Hydrant Converters	
-	

ALL PRODUCTS

Nozzles

Garden Hose Nozzles	50
Garden Hose and Couplings	50
1" Nozzles	
1 1/2" Nozzles	52
2" Nozzles	53
2 1/2" Nozzles	53
Stacked Tip Nozzles	53
Camlock Nozzles	54
U.S. Coast Guard and Navy Nozzles	54
Pistol Grip Fire Nozzles	55
Hand Tools	56
Fire Hydrant & Hose Wrenches	56, 57
Hose Storage & Reels	
Fire Hose Storage Reel	58
Fire Equipment Storage Cabinet	58
Saddle Hose Racks	59
Fiberglass Fire Cabinets	59
Fire Hose Racks	
Swing Type Hose Reels	60
Swing Reel Kits	60
Fire Hose Storage Reel Kits	61
Fire Hose Ramps	62
Fire Hose Tester	
Fire Extinguishers and Cabinets	62
Fire Hose Washer	63
Dechlorination	63

ALL PRODUCTS

Storz Spray Lubricant	63
Back Flow Preventer	63
Fire Valves	
Angle Valves	64
Gate Valves	64
Plain Wye Valves	64
Aluminum Ball Valves	65
Brass Ball Valves	65
Pump Intake Valves	65
Test Gauges	
Cap Gauges	66
In-Line Gauges	66
Test Caps	66
Gaskets	
Fire Hose & Adapter Gaskets	67
Nozzle Gaskets	67
Camlock Gaskets	67
Storz Gaskets	67
Strainers	
Strainers	
Foot Valve Strainers	68
Self Leveling Floating Strainers	69
Low Level Strainers	69
Reflective Road Markers	70
Fire Hydrant Markers	70
Wharf Hydrants	71
Mounting Plates	71

ABOUT US

FireResQ, Inc

DBA - FireHoseDirect.com Phone - 888-975-0858 Email - sales@firehosedirect.com Fax - 888-589-4389

Headquarters

115 Corprate Center Dr, Ste J Mooresville, NC 28117 United States

Monday - Friday 9:00 am to 5:00 pm EST

Closed Weekends and Holidays









Ndurance Double Jacket Fire Hose

When failure is NOT an option

Municipal Fire Hose




Features

- Proudly Made in the U.S.A.
- 10 Year warranty
- "On the job" for over 30 years
- · Mildew resistant
- Polyester double jacket
- · Service pressure 400 psi
- Proof test pressure 800 psi
- Burst test pressure 1200 psi
- · Meets or exceeds all NFPA 1961 standards
- Brass couplings available upon request











실 FireHoseDirect

Call 888.975.0858

Ndurance Double Jacket Fire Hose

1 1/2″ Dou	uble Jacket Hose
15D825	White 1 1/2" x 25' Double Jacket Fire Hose (Alum NH Couplings)
15D850	White 1 1/2" x 50' Double Jacket Fire Hose (Alum NH Couplings)
15D850B	White 1 1/2" x 50' Double Jacket Fire Hose (Brass NH Couplings)
15D850BP	White 1 1/2" x 50' Double Jacket Fire Hose (Brass NPSH Couplings)
15D8100	White 1 1/2" x 100' Double Jacket Fire Hose (Alum NH Couplings)
15D850BL	Blue 1 1/2" x 50' Double Jacket Fire Hose (Alum NH Couplings)
15D850RD	Red 1 1/2" x 50' Double Jacket Fire Hose (Alum NH Couplings)
15D850YL	Yellow 1 1/2" x 50' Double Jacket Fire Hose (Alum NH Couplings)

1 3/4" Double Jacket Hose

17D850	White 1 3/4" x 50' Double Jacket Fire Hose (Alum 1.5" NH Couplings)
17D850BL	Blue 1 3/4" x 50' Double Jacket Fire Hose (Alum 1.5" NH Couplings)
17D850RD	Red 1 3/4" x 50' Double Jacket Hose (Alum 1.5" NH Couplings)
17D850YL	Yellow 1 3/4" x 50' Double Jacket Fire Hose (Alum 1.5" NH Couplings)

2 1/2" Doi	uble Jacket Hose
25D825	White 2 1/2" x 25' Double Jacket Fire Hose (Alum NH Couplings)
25D850	White 2 1/2" x 50' Double Jacket Fire Hose (Alum NH Couplings)
25D8100	White 2 1/2" x 100' Double Jacket Fire Hose (Alum NH Couplings)
25D850B	White 2 1/2" x 50' Double Jacket Fire Hose (Brass NH Couplings)
25D850BL	Blue 2 1/2" x 50' Double Jacket Fire Hose (Alum NH Couplings)
25D850RD	Red 2 1/2" x 50' Double Jacket Fire Hose (Alum NH Couplings)
25D850YL	Yellow 2 1/2" x 50' Double Jacket Fire Hose (Alum NH Couplings)

3" Double	e Jacket Hose
30D825	White 3" x 25' Double Jacket Fire Hose (Alum 2.5" NH Couplings)
30D850	White 3" x 50' Double Jacket Fire Hose (Alum 2.5" NH Couplings)
30D850BL	Blue 3" x 50' Double Jacket Fire Hose (Alum 2.5" NH Couplings)




Adding color impregnation improves durability compared to untreated white hose.

NFPA cold	ors availab	ole upon re	quest				
White	Red	Yellow	Blue	Green	Orange	Black	Tan

Double Jacket Hose





Average Average

Excellent






Average 460_{VQ}

Excellent

Industrial Hose



Features

- Proudly Made in the U.S.A.
- 5 Year warranty
- Service Pressure 400 PSI
- Proof Test Pressure 800 PSI
- Burst Test Pressure 1200 PSI
- · Polyester double jacket
- · Mildew resistant



đ

Medium

& Heavy

Industrial


Underwriter

Laboratories

Made in

the U.S.A.

Mill Hose



Features

- · Polyester double jacket
- Service Pressure 150 PSI
- Burst Test Pressure 450 PSI
- Mildew resistant



Double Jacket Hose

Bouble Gacket Hose		
	Industrial Hose	Mill Hose
1" x 50' Double Jacket Hose (Alum NH Couplings)	10LD850	
1" x 50' Double Jacket Hose (Alum NPSH Couplings)	10LD850P	
1" x 50' Yellow Double Jacket Hose (Alum NH Couplings)	10LD850YL	
1 1/2" x 50' Double Jacket Hose (Alum NH Couplings)	15LD850	15D350
1 1/2" x 50' Double Jacket Hose (Alum NPSH Couplings)	15LD850P	15D350P
1 1/2" x 100' Double Jacket Hose (Alum NH Couplings)	15LD8100	15D3100
2" x 25' Double Jacket Hose (Alum NPSH Couplings)		20D325P
2" x 50' Double Jacket Hose (Alum NPSH Couplings)	20LD850P	20D350P
2 1/2" x 25' Double Jacket Hose (Alum NH Couplings)		25D325
2 1/2" x 50' Double Jacket Hose (Alum NH Couplings)	25LD850	25D350
2 1/2" x 100' Double Jacket Hose (Alum NH Couplings)		25D3100
4" x 25' Double Jacket Fire Hose (Alum NH Couplings)	40LD625	
4" x 50' Double Jacket Fire Hose (Alum NH Couplings)	40LD650	



Call 888.975.0858

Single Jacket Hose







Mill Hose

Rubber Liner

Outer Jacket

Features

 Polyester single jacket Service Pressure - 125 PSI

Proof Test Pressure - 250 PSI

Burst Test Pressure - 375 PSI

Polyester




Average Average

Above

Excellent

Industrial Hose





Features

Proudly Made in the U.S.A.

- In service for over 30 years
- 1 Year warranty
- Service Pressure 300 PSI
- Proof Test Pressure 600 PSI
- Burst Test Pressure 900 PSI
- Polyester single jacket
- Mildew resistant












Made in

the U.S.A.







Medium

DURABILITY

Industrial

Below

Poor

Average



Single Jackel Hose		
	Industrial Hose	Mill Hose
1 1/2" x 25' Single Jacket Hose (Alum NH Couplings)	158525	
1 1/2" x 50' Single Jacket Hose (Alum NH Couplings)	158550	15S2550
1 1/2" x 50' Single Jacket Hose (Alum NPSH Couplings)	15S550P	15S2550P
1 1/2" x 100' Single Jacket Hose (Alum NH Couplings)	15S5100	15S25100
1 1/2" x 100' Single Jacket Hose (Alum NPSH Couplings)	15S5100P	
2" x 25' Single Jacket Hose (Alum NPSH Couplings)		20S2525P
2" x 50' Single Jacket Hose (Alum NPSH Couplings)		20S2550P
2 1/2" x 25' Single Jacket Hose (Alum NH Couplings)	258525	
2 1/2" x 50' Single Jacket Hose (Alum NH Couplings)	258550	25S2550
2 1/2" x 100' Single Jacket Hose (Alum NH Couplings)	25S5100	25S25100
3" x 50' Single Jacket Hose (Alum 2.5" NH Couplings)	30S550	

Adding color impregnation improves durability compared to untreated white hose.

Colors available upon request

White	Red	Yellow	Blue	Black

Rubber Covered Hose

Features

- 10 Year warranty
- Chemical resistant
- Nitrile / PVC through-the-weave
- Service pressure 300 psi
- Proof test pressure 600 psi
- Burst test pressure 900 psi
- Meets or exceeds all NFPA 1961 standards
- Maintenance free
- Raised thick rib construction







1" Rubber Hose

10R650YL Yellow 1" x 50' Rubber Hose (Alum NH Couplings)

1 1/2" Rubber Hose			
15R625YL	Yellow 1 1/2" x 25' Rubber Hose (Alum NH Couplings)		
15R650YL	Yellow 1 1/2" x 50' Rubber Hose (Alum NH Couplings)		
15R650PYL	Yellow 1 1/2" x 50' Rubber Hose (Alum NPSH Couplings)		
15R650RD	Red 1 1/2" x 50' Rubber Hose (Alum NH Couplings)		
15R650PRD	Red 1 1/2" x 50' Rubber Hose (Alum NPSH Couplings)		

1 3/4" Rubber Hose

17R650RD

Red 1 3/4" x 50' Rubber Hose (Alum 1.5" NH Couplings)

2" Rubber Hose

20R650PYL Yellow 2" x 50' Rubber Hose (Alum NPSH Couplings)

2 1/2" Rul	bber Hose
25R625YL	Yellow 2 1/2" x 25' Rubber Hose (Alum NH Couplings)
25R650YL	Yellow 2 1/2" x 50' Rubber Hose (Alum NH Couplings)
25R625RD	Red 2 1/2" x 25' Rubber Hose (Alum NH Couplings)
25R650RD	Red 2 1/2" x 50' Rubber Hose (Alum NH Couplings)



Large Diameter Supply Hose


Features

- · Heat and chemical resistant
- Nitrile / PVC through-the-weave
- NFPA compliant supply hose
- Maintenance free
- · Thin rib construction to aid abrasion resistance
- Locking Storz Couplings





Municipal Hose

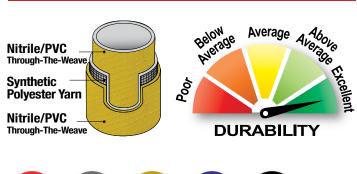








Industrial Hose

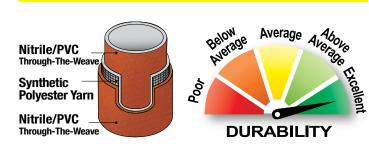



Suppl

4" Supply Hose

	Municipal Hose	Service Pressure	Industrial Hose	Service Pressure
Yellow 4" x 25' Rubber Hose (Storz Couplings)			40R525YL	225
Yellow 4" x 50' Rubber Hose (Storz Couplings)	40PF550YL	250	40R550YL	225
Yellow 4" x 100' Rubber Hose (Storz Couplings)	40PF5100YL	250	40R5100YL	225

5" Yellow Municipal Supply Hose

5" Orongo Inductrial Supply Hace

		Warranty	Service Pressure
50PF525YL	5" x 25' Rubber Hose (Storz Couplings)	10 year	225
50PF550YL	5" x 50' Rubber Hose (Storz Couplings)	10 year	225
50PF5100YL	5" x 100' Rubber Hose (Storz Couplings)	10 year	225

5 Orange Industrial Supply Hose				
		Warranty	Service Pressure	
50R425OG	5" x 25' Rubber Hose (Storz Couplings)	1 year	200	
50R450OG	5" x 50' Rubber Hose (Storz Couplings)	1 year	200	
50R4100OG	5" x 100' Rubber Hose (Storz Couplings)	1 year	200	

Booster Hose





10B350



15B2550B

Attack

Hose

Features

- Proudly Made in the U.S.A.
- 1 Year Warranty
- Couplings Brass and Aluminum
- Couplings GHT, NH, NPSH
- Hose cover Red synthetic rubber
- · Liner Nitrile synthetic rubber
- Outside temperature range 20°F 190°F
- Reel attack hose
- · Designed for hose reels
- Non-Collapsible hose
- · Every hose is tested prior to shipment





Booster Hose

		Working Pressure
75B350GHT	Red 3/4" x 50' Non-Collapsible Rubber Hose (Brass Garden Hose Couplings)	300 psi
75B350	Red 3/4" x 50' Non-Collapsible Rubber Hose (Aluminum 1" NH Couplings)	300 psi
75B350P	Red 3/4" x 50' Non-Collapsible Rubber Hose (Aluminum 1" NPSH Couplings)	300 psi
75B3100GHT	Red 3/4" x 100' Non-Collapsible Rubber Hose (Brass Garden Hose Couplings)	300 psi
75B3100	Red 3/4" x 150' Non-Collapsible Rubber Hose (Aluminum 1" NH Couplings)	300 psi
75B3150	Red 3/4" x 100' Non-Collapsible Rubber Hose (Aluminum 1" NH Couplings)	300 psi
10B350	Red 1" x 50' Non-Collapsible Rubber Hose (Aluminum 1" NH Couplings)	300 psi
10B350P	Red 1" x 50' Non-Collapsible Rubber Hose (Aluminum 1" NPSH Couplings)	300 psi
10B3100	Red 1" x 100' Non-Collapsible Rubber Hose (Aluminum 1" NH Couplings)	300 psi
10B3100P	Red 1" x 100' Non-Collapsible Rubber Hose (Aluminum 1" NPSH Couplings)	300 psi
15B2550B	Red 1 1/2" x 50' Non-Collapsible Rubber Hose (Brass 1.5" NH Couplings)	250 psi
15B25100B	Red 1 1/2" x 100' Non-Collapsible Rubber Hose (Brass 1.5" NH Couplings)	250 psi



High Pressure Booster Hose

Features

- Proudly Made in the U.S.A.
- 1 Year warranty
- · Working pressure 800 psi
- · Hose cover red synthetic rubber
- · Liner nitrile synthetic rubber
- Temperature range 0° F 180° F







High Pressure Booster Hose

75B850 Red 3/4" x 50' Non-Collapsible High Pressure Rubber Hose (Aluminum 1" NH Couplings)			
	75B850P	Red 3/4" x 50' Non-Collapsible High Pressure Rubber Hose (Aluminum 1" NPSH Couplings)	
	10B8100	Red 1" x 100' Non-Collapsible High Pressure Rubber Hose (Aluminum 1" NH Couplings)	

Features

- 1 Year warranty
- Lightweight
- · Reel attack hose
- · Field replaceable couplings
- Maximum working pressure 300 psi
- Burst pressure 900 psi
- · Hose cover single jacket polyester
- · Non-collapsible hose
- Rigid helical reinforcement
- · Designed for 12" drum reels and skid units
- Heat resistant up to 500° F







Lightweight Booster Hose



Lightweight Booster Hose

10LB650	Red 1" x 50' Non-Collapsible Lightweight Hose (Aluminum 1" NH Couplings)
10LB650P	Red 1" x 50' Non-Collapsible Lightweight Hose (Aluminum 1" NPSH Couplings)
10LB6100	Red 1" x 100' Non-Collapsible Lightweight Hose (Aluminum 1" NH Couplings)
10LB6100P	Red 1" x 100' Non-Collapsible Lightweight Hose (Aluminum 1" NPSH Couplings)
10LB650YL	Yellow 1" x 50' Non-Collapsible Lightweight Hose (Aluminum 1" NH Couplings)
10LB650PYL	Yellow 1" x 50' Non-Collapsible Lightweight Hose (Aluminum 1" NPSH Couplings)
10LB6100YL	Yellow 1" x 100' Non-Collapsible Lightweight Hose (Aluminum 1" NH Couplings)
10LB6100PYL	Yellow 1" x 100' Non-Collapsible Lightweight Hose (Aluminum 1" NPSH Couplings)

PVC Camlock Hose



				Camlock Hose
Max psi	Medium Duty	Max psi	Lightweight	Product Description
150	15RD50CE	80	15BD50CE	1 1/2" x 50' Camlock Hose
150	15RD100CE	80	15BD100CE	1 1/2" x 100' Camlock Hose
150	20RD50CE	80	20BD50CE	2" x 50' Camlock Hose
150	20RD100CE	80	20BD100CE	2" x 100' Camlock Hose
150	30RD50CE	70	30BD50CE	3" x 50' Camlock Hose
		70	30BD100CE	3" x 100' Camlock Hose
125	40RD50CE	70	40BD50CE	4" x 50' Camlock Hose
125	40RD100CE	70	40BD100CE	4" x 100' Camlock Hose
115	60RD50CE	50	60BD50CE	6" x 50' Camlock Hose
115	60RD100CE	50	60BD100CE	6" x 100' Camlock Hose
	60RD100CE	50	60BD100CE	6" x 50' Camlock Hose 6" x 100' Camlock Hose

* Not intended for use as a fire hose, closed applications or with a nozzle.



Polyester Camlock Hose











Single and Double Jacket






Features

- · Female aluminum camlock fitting
- · Male aluminum camlock fitting
- Tube black lay flat EPDM rubber liner
- 100% all polyester
- · Galvanized band clamps





Features

• Proudly Made in the U.S.A.

- 5 Year warranty
- · Hose type polyester double jacket
- · Mildew resistant
- Proof test pressure 400 psi
- Burst test pressure 800 psi





Camlock Hose Product Description High-Pressure Single Jacket **Double Jacket** 1 1/2" x 50' Camlock Hose 15S2550CE 15D350CE 15LD850CE 1 1/2" x 100' Camlock Hose 15D3100CE 15S25100CE 2" x 50' Camlock Hose 20S2550CE 20D350CE 20LD850CE 2" x 100' Camlock Hose 20S25100CE 2 1/2" x 50' Camlock Hose 25S2550CE 25D350CE 3" x 50' Camlock Hose 30S2550CE 30D350CE 4" x 50' Camlock Hose 40S2550CE 40D350CE

Single Jacket Forestry Hose

Features


- Proudly Made in the U.S.A.
- 1 Year warranty
- In service for over 30 years
- Polyester single jacket
- Mildew resistant
- Liner EPDM rubber
- Service pressure 300 psi
- Proof test pressure 600 psi
- Burst test pressure 900 psi
- Meets and exceeds all NFPA 1961 standards
- USDA first article tested and approved
- 5100 187c Type 2 compliant
- Adding color impregnation improves durability compared to untreated white hose
















Forestry Hose

White 5/8" x 50' Forestry Hose (Brass Garden Hose Couplings)		
Yellow 5/8" x 50' Forestry Hose (Brass Garden Hose Couplings)		
White 1" x 25' Forestry Hose (Alum NH Couplings)		
White 1" x 50' Forestry Hose (Alum NH Couplings)		
White 1" x 50' Forestry Hose (Alum NPSH Couplings)		
Yellow 1" x 50' Forestry Hose (Alum NH Couplings)		
Yellow 1" x 50' Forestry Hose (Alum NPSH Couplings)		
White 1" x 100' Forestry Hose (Alum NH Couplings)		
White 1" x 100' Forestry Hose (Alum NPSH Couplings)		
Yellow 1" x 100' Forestry Hose (Alum NH Couplings)		
Yellow 1" x 100' Forestry Hose (Alum NPSH Couplings)		
White 1 1/2" x 50' Forestry Hose (Alum NH Couplings)		
White 1 1/2" x 100' Forestry Hose (Alum NH Couplings)		
Yellow 1 1/2" x 50' Forestry Hose (Alum NH Couplings)		
Yellow 1 1/2" x 100' Forestry Hose (Alum NH Couplings)		



US Coast Guard Hose










USCG Single Jacket



Features

- Proudly Made in the U.S.A.
- 1 Year warranty
- Polyester single jacket (mildew resistant)
- Liner EPDM rubber
- Service Pressure 250 psi
- Meets and exceeds all NFPA 1961 standards
- All hoses stenciled UL-19
- · All hoses dated
- Brass couplings




USCG Hose





USCG Mil-Spec Hose



Features

- Proudly Made in the U.S.A.
- 10 Year warranty
- · Polyester double jacket
- Liner EPDM rubber
- Service pressure 300 psi
- Proof test pressure 600 psi
- Burst test pressure 900 psi
- ZZ-H-451-G compliant
- Meets and exceeds all NFPA 1961 standards
- All hoses stenciled Mil-H-24606B
- All hoses dated



Product Description	Single Jacket	Double Jacket
White 1 1/2" x 50' Single Jacket USCG / UL Hose (Brass NH Couplings)	15S550BUL	
Orange 1 1/2" x 25' Mil-Spec Hose (Brass NPSH Couplings)		15D6MS25BP
Orange 1 1/2" x 50' Mil-Spec Hose (Brass NPSH Couplings)		15D6MS50BP
Orange 1 3/4" x 25' Mil-Spec Hose (Brass 1.5" NPSH Couplings)		17D6MS25BP
Orange 1 3/4" x 50' Mil-Spec Hose (Brass 1.5" NPSH Couplings)		17D6MS50BP
Orange 2 1/2" x 25' Mil-Spec Hose (Brass NH Couplings)		25D6MS25B
Orange 2 1/2" x 50' Mil-Spec Hose (Brass NH Couplings)		25D6MS50B

Discharge Hose

Lay Flat PVC Reinforced Polyester Ya Lay Flat PVC	rn	Lay Flat PVC Reinforced Polyester Yarn Lay Flat PVC	Rubber Polyest Outer J	er
 Female couplin Galvanized ban Open ended dis 	scharge			idential Pump Discharge Light Industrial
Discharge	Hose			Max psi
20BD50MF E	Blue 2" x 50' Lightweight	Discharge Hose		80 psi

20BD50MF	Blue 2" x 50' Lightweight Discharge Hose	80 psi
20BD100MF	Blue 2" x 100' Lightweight Discharge Hose	80 psi
30BD50MF	Blue 3" x 50' Lightweight Discharge Hose	70 psi
40BD50MF	Blue 4" x 50' Lightweight Discharge Hose	70 psi
20RD50MF	Red 2" x 50' Medium Duty Discharge Hose	150 psi
20RD100MF	Red 2" x 100' Medium Duty Discharge Hose	150 psi
40RD50MF	Red 4" x 50' Medium Duty Discharge Hose	125 psi
20S1550MF	White 2" x 50' Single Jacket Discharge Hose	150 psi
30S1550MF	White 3" x 50' Single Jacket Discharge Hose	150 psi
40S1050MF	White 4" x 50' Single Jacket Discharge Hose	125 psi

* Not intended for use as a fire hose. Used for open ended discharge applications only



Potable Water Hose









Polyester Hose






Features

- Proudly Made in the U.S.A.
- 5 Year warranty
- Polyester double jacket (mildew resistant)
- · Polyurethane liner is NSF-61 compliant
- Service pressure 300 psi
- Proof test pressure 600 psi
- Burst test pressure 900 psi
- Meets or exceeds Mil-H-24606B

Rubber Covered Hose



Features

- 1 Year warranty
- · Color blue
- · Hose type polyurethane
- · Polyurethane liner is NSF-61 compliant
- · Service pressure 150 psi
- · Brass couplings
- · Galvanized band clamps
- · Garden hose threads







4



Potable Water Hose

	Polyester Hose	Rubber Covered Hose
Blue 1" x 50' Potable Water Hose (Brass GHT Couplings)		10P450BBL
Blue 1 1/2" x 25' Potable Water Hose (Brass NH Couplings)	15P625BBL	
Blue 1 1/2" x 50' Potable Water Hose (Brass NH Couplings)	15P650BBL	
Blue 1 1/2" x 100' Potable Water Hose (Brass NH Couplings)	15P6100BBL	
Blue 2 1/2" x 25' Potable Water Hose (Brass NH Couplings)	25P625BL	
Blue 2 1/2" x 50' Potable Water Hose (Brass NH Couplings)	25P650BBL	

Green Hard Suction Hose





Features

- 1 Year warranty
- Outside temperature 150° F to -4° F
- PVC tube with rigid PVC helix






- Female brass NPSH coupling
- Male aluminum NPT coupling

Camlock to Thread

- Male aluminum NPT coupling
- Female aluminum camlock

Camlock to Camlock

- Female aluminum camlock
- Male aluminum camlock





Green Hard Suction Hose

	Thread to Thread	Camlock to Thread	Camlock to Camlock
Green 1.5" x 20' Suction Hose			15GHS20CE
Green 2.0" x 20' Suction Hose	20GHS20PN	20GHSCN	20GHS20CE
Green 3.0" x 20' Suction Hose	30GHS20PN	30GHSCN	30GHS20CE
Green 4.0" x 20' Suction Hose	40GHS20PN	40GHSCN	40GHS20CE
Green 6.0" x 20' Suction Hose			60GHS20CE

* Custom lengths available upon request



Heavy-Duty Hard Suction Hose

Features

- 1 Year warranty
- Female aluminum camlock
- Male aluminum camlock
- Tube natural and synthetic rubber
- Reinforced with high tensile synthetic yarn and steel helix wire
- Covered with abrasion and weather resistant synthetic rubber
- Outside temperature 185° F to -22° F







Heavy-Duty Suction Hose

	Camlock to Camlock	Working psi
Black 2.0" x 20' Heavy-Duty Suction Hose	20BHS20CE	150
Black 3.0" x 20' Heavy-Duty Suction Hose	30BHS20CE	150
Black 4.0" x 20' Heavy-Duty Suction Hose	40BHS20CE	150
Black 6.0" x 20' Heavy-Duty Suction Hose	60BHS20CE	150

* Custom lengths available upon request

Clear PVC Suction Hose

Features

- Proudly Made in the U.S.A.
- 1 Year warranty
- Outside temperature 140° F to -5° F
- PVC tube with rigid PVC helix
- Expansion ring couplings
- Transparent construction for visual confirmation
- · All hoses are vacuum tested before shipment





Clear PVC Suction Hose

		Working psi
15HS10	Clear 1 1/2" x 10' Rocker Lug Hard Suction Hose (NH)	30

* Custom lengths available upon request

Black / Clear Suction Hose





Features

- Proudly Made in the U.S.A.
- 1 Year warranty
- Couplings are Aircraft Grade 6061-T6 seamless extrusions
- Working outside temperature (22° F to 140° F)
- · Hose color black and clear
- · Corrugated exterior for superior flexibility
- · Smooth bore for unrestricted flow
- · Lightweight and flexible in cold weather
- · Clear sidewall permits visual check
- Highly resistant to ozone, salt water, and ultraviolet light

EQ.



Storz x Storz

Features

- Proudly Made in the U.S.A.
- 1 Year warranty
- Includes two hoses
- Locking coupling
- Working pressure 20 psi
- Vacuum rating 28 Hg
- Working outside temperature 22° F to 140° F

Made in

the U.S.A.

Call 888.975.0858

Fire

Department

Industrial

Agricultural

· Hose color - black and clear



Black / Clear PVC Suction Hose

Long Handle (NH)	Storz
25HS10	
30HS10	
40HS10-2	
45HS10-2	
50HS10-2	50HSS10-2*
60HS10-2	60HSS10-2*
	25HS10 30HS10 40HS10-2 45HS10-2 50HS10-2

* All storz hoses have two lugs except 6" has three lugs.

Note – 25HS10 uses 3" hose and 45HS10-2 uses 5" hose

Custom lengths available upon request

NG Not intended for hydrant pressure or head pressure from an above ground holding tank.

실 FireHoseDirect

Pin Rack Hose





Pin Rack Hose

Features

- · Polyester single jacket
- · Liner Polyurethane
- Service pressure 250 psi
- Proof test pressure 500 psi
- · Pre-folded for ease of installation
- · FM approved standard
- · Designed for interior fire fighting only
- All hose dated prior to shipment
- Brass couplings

Pin Rack Hose Assembly

Assembly Includes

- Angle valve 1 1/2" NPT Female Inlet x 1 1/2" NPT Female Outlet
- Brass nipple 1 1/2" NPT Male x 1 1/2" NH Male
- UL / FM Brass 1 1/2" NH rack nozzle

Features

- Pin rack Capacity 100 feet
- Hose available in 50, 75 and 100 feet
- · Cadmium plated escutcheon
- Length of 1 1/2" pin rack hose with brass NH threaded couplings



Pin Rack Hose

15PR550B	White 1 1/2" x 50' Pin Rack Hose (Brass NH Couplings)
15PR575B	White 1 1/2" x 75' Pin Rack Hose (Brass NH Couplings)
15PR5100B	White 1 1/2" x 100' Pin Rack Hose (Brass NH Couplings)
15PR525BFDNY	White 1 1/2" x 25' Pin Rack Hose (Brass FDNY Couplings)
15PR550BFDNY	White 1 1/2" x 50' Pin Rack Hose (Brass FDNY Couplings)
25PR550BFDNY	White 2 1/2" x 50' Pin Rack Hose (Brass FDNY Couplings)

Pin Rack Hose Assembly

15PRA550B	White 1 1/2" x 50' Pin Rack Hose Assembly (Brass NH Couplings)
15PRA575B	White 1 1/2" x 75' Pin Rack Hose Assembly (Brass NH Couplings)
15PRA5100B	White 1 1/2" x 100' Pin Rack Hose Assembly (Brass NH Couplings)

Hose can be UL Label for an additional price per foot.

Hose Threads

Garden Hose Thread (GHT)

- · The female threads will only connect to a male GHT.
- The male threads will only connect to a female GHT.
- It WILL NOT connect to 3/4" NPT or NPSH threads.
- · GHT fittings seal with included gasket.

Fire Hose Thread (NH / NST)

- National Hose also known as National Standard Thread.
- · The female threads will only connect to a male NH.
- The male threads will only connect to a female NH.
- NH is the most common thread in the fire service.
- NH fittings seal with included gasket.

Pipe Thread (NPT)


- National Pipe Tapered
- The female threads will only connect to a male NPT.
- · The male threads will only connect to a female NPT or NPSH.
- An NPT to NPT connect requires thread compound to seal.
- A male NPT to female NPSH seals with included gasket.

Straight Hose Thread (NPSH)

- National Pipe Straight Hose
- The female threads will only connect to a male NPT or NPSH.
- · The male threads will only connect to a female NPSH.
- A male NPSH WILL NOT thread into a female NPT.







Male GHT

Female GHT

NH, NHT, NST - Temporary Gasket Connection







Male NH

Female NH

NPSH to NPSH - Temporary Gasket Connection




Male NPSH



Female NPSH







Male NPT

Female NPSH

NPT to NPT - Permanent Connection





Female NPT

NPSH to NPT - NOT Compatible







Female NPT





Male NPSH

Common Hose Connections

Commonly Used U.S. Fire Hose Connection

Size		onal Stand NH or NST		National Pipe Straight Hose NPSH or NPT				Garden Hose GHT			
	OE	M	TPI	NPSH	ODM	NPT	ODM	TPI	OE	M	TPI
3/4"	1 3/8"	1.375	N/A	1"	1.035	1"	.988	14	1 1/16"	1.062	11 1/2
1"	1 3/8"	1.375	8	1 1/4"	1.295	1 1/4"	1.238	11 1/2			
1 1/2"	2"	1.990	9	1 7/8"	1.878	1 13/16"	1.822	11 1/2			
2"	2 1/2"	2.515	8	2 3/8"	2.352	2 5/16"	2.296	11 1/2			
2 1/2"	3 1/16"	3.068	7 1/2	2 13/16"	2.841	2 3/4"	2.762	8			
3"	3 5/8"	3.623	6	3 1/2"	3.470	3 3/8"	3.388	8			
3 1/2"	4 1/2"	4.243	6	4"	3.970	3 7/8"	3.888	8			
4"	5"	5.010	4	4 1/2"	4.470	4 3/8"	4.387	8			
4 1/2"	5 3/4"	5.760	4	5"	4.970			8			
5"	6 1/4"	6.260	4	5 9/16"	5.5625	5 7/16"	5.449	8			
6"	7"	7.025	4	6 5/8"	6.625	6 1/2"	6.505	8			

Other U.S. Standard 2 1/2" Hose Threads

	ODM		TPI
British Pipe BSP	2 31/32"	2.9600	11
New York Corp NYC	3"	3.0000	8
New York City FD FDNY	3 1/32"	3.0300	8
Pacific Coast PCT	3 1/32"	3.0350	7 1/2
Chicago Hose	3 3/64"	3.0430	7
Chicago Fire Dept CFD	3"	3.0000	7 1/2
Buffalo, NY	3 1/16"	3.0625	8
Cincinnati, OH (New)	3 1/32"	3.0580	6
Cleveland, OH	3 5/64"	3.0781	8
Denver, CO	3 3/32"	3.0920	8
Detroit, MI	3 1/8"	3.1250	7 1/2
Omaha, NE	3 5/64"	3.0781	8
Phoenix, AZ (Old)	3 1/16"	3.0620	6
Pittsburg, PA	3 1/16"	3.0625	6
Salt Lake City, UT	3 1/4"	3.2500	6
Toledo, OH	3"	3.0000	8

Canadian Standard 2 1/2" Hose Threads

		ODM		TPI
AMA	Alberta Mutual Aid	3"	2.990	8
BCT			3.000	8
CSA			3.125	5
QST	Province of Quebec Std.	3 1/32"	3.031	7
WCT			3.250	6
NOVA			3.234	5
QMT	Quebec / Montreal Combination	3 1/32"	3.031	7

ODM = Outside Diameter of Male TPI = Threads Per Inch

Features

- Proudly Made in the U.S.A.
- Lead free
- Heavy-duty
- · Lifetime warranty
- Threads stamped into aluminum
- · Hard coated anodized finish
- Maximum working pressure 300 psi
- Hydrostatic tested at 1000 psi
- Meet or exceed all NFPA Standards
- Includes gaskets on NH, NPSH and GHT
- · Resists corrosion, abrasion and reduces electrolysis

Female to Male Threads					Female to Male Threads				
Female Thread	Male Thread	Rigid	Swivel	Hex	Female Thread	Male Thread	Rigid	Swivel	Hex
GHT	1" NH	37RG1			1 1/2" NH	2 1/2" NH	37R1525	54R1525	
GHT	1" NPSH	37RG1P			1 1/2" NPSH	GHT	37R15PG		
GHT	1 1/2" NH	37RG15			1 1/2" NPSH	1" NH	37R15P1		
1" NH	GHT	37R1G		37H1G	1 1/2" NPSH	1" NPSH	37R15P1P		
1" NH	1" NPSH	37R11P		37H11P	1 1/2" NPSH	1 1/2" NH	37R15P15	54R15P15	37H15P15
1" NH	1" NPT	37R11N			1 1/2" NPSH	1 1/2" NPSH	37R15P15P		
1" NH	1 1/2" NH	37R115			1 1/2" NPSH	1 1/2" NPT	37R15P15N	54R15P15N	
1" NPSH	GHT	37R1PG		37H1PG	1 1/2" NPT	1 1/2" NH	37R15N15		37H15N15
1" NPSH	1" NH	37R1P1		37H1P1	1 1/2" NPT	1 1/2" NPSH	37R15N15P		
1" NPSH	1" NPT	37R1P1N			1 1/2" NPT	2 1/2" NH	37R15N25		
1" NPSH	1 1/2" NH	37R1P15			2" NH	1 1/2" NH	37R215		
1" NPSH	1 1/2" NPSH	37R1P15P			2" NPT	1" NH	37R2N1		
1" NPT	1" NH	37R1N1		37H1N1	2" NPT	1 1/2" NH	37R2N15		37H2N15
1 1/2" NH	GHT	37R15G		37H15G	2" NPT	1 1/2" NPSH	37R2N15P		
1 1/2" NH	1" NH	37R151		37H151	2" NPT	2 1/2" NH	37R2N25		
1 1/2" NH	1" NPSH	37R151P		37H151P	2" NPSH	GHT	37R2PG		
1 1/2" NH	1" NPT	37R151N			2" NPSH	1 1/2" NH	37R2P15		
1 1/2" NH	1 1/2" NH	37R1515			2" NPSH	1 1/2" NPSH	37R2P15P		
1 1/2" NH	1 1/2" NPSH	37R1515P		37H1515P	2" NPSH	2" NPSH	37R2P2P		
1 1/2" NH	1 1/2" NPT	37R1515N	54R1515N	37H1515N	2" NPSH	2" NPT	37R2P2N		
1 1/2" NH	2" NPT	37R152N			2" NPSH	2 1/2" NH	37R2P25		

Adapters with NH, GHT or BSP threads will only connect to fittings with the same threads. The female side of a NPT adapter will only connect to a male NPT. The female side of a NPSH adapter will connect to a NPT or NPSH. The male side of NPT adapter will connect to a NPT or NPSH. The male side of a NPSH adapter will only connect to a NPSH.






Rigid

Swivel

Hex*











Female to Male Threads					Female	Female to Male Threads				
Female Thread	Male Thread	Rigid	Swivel	Hex	Female Thread	Male Thread	Rigid	Swivel	Hex	
2 1/2" NH	GHT	37R25G		37H25G	3" NPT	2 1/2" NH	37R3N25		37H3N25	
2 1/2" NH	1" NH	37R251			3" NPT	3" NH	37R3N3			
2 1/2" NH	1" NPSH	37R251P			3 1/2" NH	2 1/2" NH	37R3525			
2 1/2" NH	1" NPT	37R251N			4" NH	2 1/2" NH	37R425			
2 1/2" NH	1 1/2" NH	37R2515	54R2515	37H2515	4" NH	4" NPT	37R44N	54R44N		
2 1/2" NH	1 1/2" NPSH	37R2515P			4" NH	4 1/2" NH	37R445			
2 1/2" NH	1 1/2" NPT	37R2515N	54R2515N		4" NPT	2 1/2" NH	37R4N25			
2 1/2" NH	2" NPSH	37R252P			4" NPT	4" NH	37R4N4			
2 1/2" NH	2" NPT	37R252N	54R252N	37H252N	4" NPT	4 1/2" NH	37R4N45			
2 1/2" NH	2 1/2" NH	37R2525			4 1/2" NH	2 1/2" NH	37R4525			
2 1/2" NH	2 1/2" NPSH	37R2525P			4 1/2" NH	4" NH	37R454			
2 1/2" NH	2 1/2" NPT	37R2525N	54R2525N		4 1/2" NH	4" NPT	37R454N	54R454N		
2 1/2" NH	3" NH	37R253			4 1/2" NH	5" NH	37R455			
2 1/2" NH	3" NPT	37R253N	54R253N		4 1/2" NH	6" NH	37R456			
2 1/2" NH	4" NH	37R254			5" NH	4" NH	37R54			
2 1/2" NPSH	1 1/2" NPSH	37R25P15P			5" NH	4 1/2" NH	37R545			
2 1/2" NPSH	2 1/2" NH	37R25P25			5" NH	6" NH	37R56			
2 1/2" NPT	2 1/2" NH	37R25N25		37H25N25	6" NH	4" NPT	37R64N			
2 1/2" BSP	2 1/2" NPT	37R25B25N			6" NH	5" NH	37R65			
3" NH	1 1/2" NH	37R315			6" NH	6" NPT	37R66N			
3" NH	2 1/2" NH	37R325		37H325	6" NPT	4 1/2" NH	37R6N45			
3" NH	3" NPT	37R33N			6" NPT	6" NH	37R6N6			
3" NPSH	2 1/2" NH	37R3P25								

Custom sizes available upon request.


* The Hex adapters are imported and have not been tested for lead.

The Safe Water Drinking Act section 1417 requires "Lead Free" products to be a minimum of 99.75% lead free.

Features

- Proudly Made in the U.S.A.
- · Hard coated anodized finish
- Lifetime warranty
- Meet or exceed all NFPA standards
- Maximum working pressure 300 psi
- Hydrostatic tested at 1000 psi

25% More Aluminum

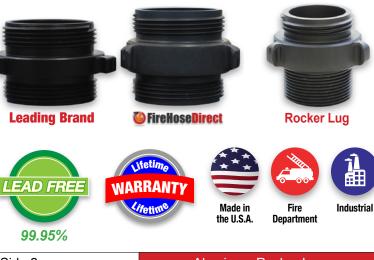

Male to Male Threads	99.95%	
Side 1	Side 2	Aluminum Rocker Lug
1" NH	1" NH	36R11
1" NH	1" NPSH	36R11P
1" NH	1" NPT	36R11N
1" NPSH	1" NPT	36R1P1N
1 1/2" NH	1 1/2" NH	36R1515
1 1/2" NH	1 1/2" NPSH	36R1515P
1 1/2" NH	1 1/2" NPT	36R1515N
1 1/2" NPSH	1 1/2" NPSH	36R15P15P
1 1/2" NPSH	1 1/2" NPT	36R15P15N
2" NPT	1 1/2" NH	36R2N15
2" NPT	1 1/2" NPSH	36R2N15P
2 1/2" NH	1 1/2" NH	36R2515
2 1/2" NH	1 1/2" NPT	36R2515N
2 1/2" NH	2" NPT	36R252N
2 1/2" NH	2 1/2" NH	36R2525
2 1/2" NH	2 1/2" NPT	36R2525N
3" NH	2 1/2" NH	36R325
3" NH	3" NPT	36R33N
3" NPT	2 1/2" NH	36R3N25
4" NH	4" NPT	36R44N
4" NPT	2 1/2" NH	36R4N25
4 1/2" NH	4" NPT	36R454N
4 1/2" NH	4 1/2" NH	36R4545
6" NH	6" NPT	36R66N

Custom sizes available upon request.

Adapters with NH, GHT or BSP threads will only connect to fittings with the same threads. The male side of NPT adapter will connect to a NPT or NPSH. The male side of a NPSH adapter will only connect to a NPSH. The Safe Water Drinking Act section 1417 requires "Lead Free" products to be a minimum of 99.75% lead free.



Features

- Proudly Made in the U.S.A.
- · Hard coated anodized finish
- Lifetime warranty
- Meet or exceed all NFPA standards
- Maximum working pressure 300 psi
- Hydrostatic tested at 1000 psi
- Gaskets included

75% More Aluminum



Leading Brand

Industrial



🎱 FireHoseDirect

Leading Brand



Swivel

FireHoseDirect



Female to Female Threads

Side 2	Swivel
1" NH	35R11
1" NPSH	35R11P
1" NPSH	35R1P1P
1 1/2" NH	35R1515
1 1/2" NPSH	35R1515P
1 1/2" NPT	53R1515N
1 1/2" NPSH	35R15P15P
2" NPSH	35R2P2P
1 1/2" NH	53R2N15
1 1/2" NH	35R2515
2" NPT	53R252N
2 1/2" NH	35R2525
2 1/2" NPSH	53R2525P
2 1/2" NPT	53R2525N
3" NH	35R33
2 1/2" NH	53R3N25
4" NH	35R44
4" NPT	53R44N
4" NPT	53R454N
4 1/2" NH	35R4545
6" NH	35R66
6" NPT	53R66N
	1" NH 1" NPSH 1" NPSH 1 1/2" NPSH 1 1/2" NPSH 1 1/2" NPSH 2" NPSH 2" NPSH 1 1/2" NH 1 1/2" NH 2 1/2" NH 2 1/2" NH 2 1/2" NPT 3" NH 2 1/2" NH 4" NPT 4" NPT 4 1/2" NH 6" NH

Custom sizes available upon request. Adapters with NH, GHT or BSP threads will only connect to fittings with the same threads. The female side of a NPT adapter will only connect to a male NPT. The female side of a NPSH adapter will connect to a NPT or NPSH.

The Safe Water Drinking Act section 1417 requires "Lead Free" products to be a minimum of 99.75% lead free.









male to Male	e Threads	_		
Female Thread	Male Thread	Hex	Swivel Pin Lug	Pin Lug
GHT	1" NH	B37HG1		
GHT	1" NPSH	B37HG1P		
GHT	1" NPT	B37HG1N		
GHT	1 1/2" NH	B37HG15		
1" NH	GHT	B37H1G		
1" NH	1" NPSH	B37H11P		
1" NH	1" NPT	B37H11N		
1" NH	1 1/2" NH	B37H115		
1" NPSH	GHT	B37H1PG		
1" NPSH	1" NH	B37H1P1		
1" NPSH	1" NPT	B37H1P1N		
1" NPSH	1 1/2" NH	B37H1P15		
1" NPSH	1 1/2" NPSH	B37H1P15P		
1" NPT	GHT	B37H1NG		
1" NPT	1" NH	B37H1N1		
1" NPT	1" NPSH	B37H1N1P		
1" NPT	1 1/2" NH	B37H1N15		
1 1/2" NH	GHT	B37H15G		B37P15G
1 1/2" NH	3/4" NPT	B37H1575N		
1 1/2" NH	1" NH	B37H151		
1 1/2" NH	1" NPSH	B37H151P		
1 1/2" NH	1" NPT	B37H151N		
1 1/2" NH	1 1/2" NH	B37H1515		
1 1/2" NH	1 1/2" NPSH	B37H1515P		
1 1/2" NH	1 1/2" NPT	B37H1515N	B54P1515N	
1 1/2" NH	2" NPT	B37H152N		
1 1/2" NH	2 1/2" NH	B37H1525		
1 1/2" NH	2 1/2" NPT	B37H1525N		
1 1/2" NPSH	GHT	B37H15PG		
1 1/2" NPSH	1" NH	B37H15P1		
1 1/2" NPSH	1" NPSH	B37H15P1P		
1 1/2" NPSH	1 1/2" NH	B37H15P15		
1 1/2" NPSH	1 1/2" NPT	B37H15P15N		
1 1/2" NPSH	2" NPT	B37H15P2N		

The female and male side of an adapter with NH or GHT threads will only connect to fittings with the same threads. The female side of a NPT adapter will only connect to a male NPT. The female side of a NPSH adapter will connect to a NPT or NPSH.



Female to Male Threads

Female Thread	Male Thread	Hex	Swivel Pin Lug	Pin Lug
1 1/2" NPT	1" NH	B37H15N1		
1 1/2" NPT	1 1/2" NH	B37H15N15		
1 1/2" NPT	1 1/2" NPSH	B37H15N15P		
1 1/2" NPT	2 1/2" NH	B37H15N25		
2" NPSH	1 1/2" NH	B37H2P15		
2" NPSH	1 1/2" NPSH	B37H2P15P		
2" NPSH	1 1/2" NPT	B37H2P15N		
2" NPSH	2 1/2"	B37H2P25		
2" NPT	1 1/2" NH	B37H2N15		
2" NPT	1 1/2" NPSH	B37H2N15P		
2" NPT	1 1/2" NPT	B37H2N15N		
2" NPT	2" NPSH	B37H2N2P		
2" NPT	2 1/2" NH	B37H2N25		
2 1/2" NH	GHT	B37H25G		B37P25G
2 1/2" NH	3/4" NPT	B37H2575N		
2 1/2" NH	1" NH	B37H251		
2 1/2" NH	1 1/2" NH	B37H2515		B37P2515
2 1/2" NH	1 1/2" NPSH	B37H2515P		B37P2515P
2 1/2" NH	1 1/2" NPT	B37H2515N	B54P2515N	
2 1/2" NH	2" NPSH	B37H252P		
2 1/2" NH	2" NPT	B37H252N	B54P252N	
2 1/2" NH	2 1/2" NPSH	B37H2525P		
2 1/2" NH	2 1/2" NPT	B37H2525N	B54P2525N	
2 1/2" NH	3" NPT	B37H253N	B54P253N	
2 1/2" NPSH	1 1/2" NPSH	B37H25P15P		
2 1/2" NPSH	2 1/2" NH	B37H25P25		
2 1/2" NPT	1 1/2" NH	B37H25N15		
2 1/2" NPT	2 1/2" NH	B37H25N25		
3" NPSH	2 1/2" NH	B37H3P25		
3" NPT	2 1/2" NH	B37H3N25		
3" NPT	2 1/2" NPT	B37H3N25N		
4" NH	2 1/2" NH			B37P425
4" NH	4" NH	B37H4N4		
4" NH	4" NPT	B37H44N		
4" NPT	2 1/2" NH	B37H4N25		
4" NPT	4 1/2" NH	B37H4N45		
4 1/2" NH	2 1/2" NH	B37H4525		
4 1/2" NH	4" NPT	B37H454N		
6" NH	6" NPT	B37H66N		
6" NPT	6" NH	B37H6N6		

The male side of NPT adapter will connect to a NPT or NPSH. The male side of a NPSH adapter will only connect to a NPSH.





Hex



Male to Mal	e Threads		Male to Mal	e Threads	
Side 1	Side 2	Hex	Side 1	Side 2	Hex
1" NH	1" NH	B36H11	2" BSP	2" NPT	B36H2N2BSP
1" NH	1" NPT	B36H11N	2" NPT	2" NPT	B36H2N2N
1" NPSH	1" NH	B36H11P	2" NPSH	2" NPT	B36H2P2N
1" NPSH	1" NPSH	B36H1P1P	2 1/2" NH	1" NPT	B36H251N
1" NPSH	1" NPT	B36H1P1N	2 1/2" NH	1 1/2" NH	B36H2515
1" NPT	GHT	B36H1NG	2 1/2" NH	1 1/2" NPT	B36H2515N
1" NPT	1" NPT	B36H1N1N	2 1/2" NPT	1 1/2" NH	B36H25N15
1 1/2" NH	3/4" NPT	B36H1575	2 1/2" NH	2" NPT	B36H252N
1 1/2" NH	1" NH	B36H151	2 1/2" NPSH	2" NPT	B36H25P2N
1 1/2" NH	1" NPT	B36H151N	2 1/2" NH	2 1/2" NH	B36H2525
1 1/2" NH	1 1/2" NH	B36H1515	2 1/2" NH	2 1/2" NPT	B36H2525N
1 1/2" NH	1 1/2" NPSH	B36H1515P	3" NPT	2 1/2" NH	B36H3N25
1 1/2" NH	1 1/2" NPT	B36H1515N	3" NPT	2 1/2" NPT	B36H3N25N
1 1/2" NPSH	1" NPT	B36H15P1N	3" NPT	3" NPT	B36H3N3N
1 1/2" NPSH	1 1/2" NPSH	B36H15P15P	4" NH	4" NPT	B36H44N
1 1/2" NPSH	1 1/2" NPT	B36H15P15N	4" NPT	4" NPT	B36H4N4N
1 1/2" NPT	1" NH	B36H15N1	4 1/2" NH	4" NPT	B36H454N
1 1/2" NPT	1" NPT	B36H15N1N	6" NPT	4 1/2" NH	B36H6N45
1 1/2" NPT	1 1/2" NPT	B36H15N15N	6" NH	6" NPT	B36H66N
2" NPT	1 1/2" NH	B36H2N15	6" NPT	6" NPT	B36H6N6N
2" NPT	1 1/2" NPSH	B36H2N15P	L	1	

Adapters with NH or GHT threads will only connect to fittings with the same threads. The male side of NPT adapter will connect to a NPT or NPSH. The male side of a NPSH adapter will only connect to a NPSH.











Rocker Swivel

Female to Fem	ale Threads			
Side 1	Side 2	Hex	Swivel Pin Lug	Rocker Swivel
GHT	GHT	B35HGG		
1 1/2" NH	1 1/2" NH	B35H1515	B35P1515	B35R1515
1 1/2" NH	1 1/2" NPSH	B35H1515P	B35P1515P	
1 1/2" NH	1 1/2" NPT	B35H1515N	B35P1515N	
1 1/2" NPSH	1 1/2" NPSH	B35H15P15P	B35P15P15P	
1 1/2" NPSH	1 1/2" NPT		B35P15P15N	
2 1/2" NH	1 1/2" NPT		B35P2515N	
2 1/2" NH	2" NPT		B35P252N	
2 1/2" NH	2 1/2" NH	B35H2525	B35P2525	B35R2525
2 1/2" NH	2 1/2" NPSH	B35H2525P		
2 1/2" NH	2 1/2" NPT	B35H2525N	B35P2525N	
2 1/2" NH	3" NPT		B35P253N	
2 1/2" NPSH	2 1/2" NPSH	B35H25P25P		
4" NH	4" NPT		B35P44N	

Adapters with NH or GHT threads will only connect to fittings with the same threads. The female side of a NPT adapter will only connect to a male NPT. The female side of a NPSH adapter will connect to a NPT or NPSH.

Storz Adapters

Features

- Proudly Made in the U.S.A.
- · Hard coated anodized finish
- Lifetime warranty
- Stainless Steel Lock Lever assembly on all 4", 5", and 6"



LEAD FREE

99.95%

Male

Female



Fire Department

Made in the U.S.A.

Long Handle

Storz					
Storz Size	Threads	Male	Female	Swivel Female	Female Long Handle Swivel
1 1/2"*	1 1/2" NH	S15M15			
2"*	1 1/2" NPT	S2M15N			
2 1/2"*	2 1/2" NH		S25F25	S25FS25	
4"	2 1/2" NH	S36S425	S4F25	S4FS25	
4"	3" NPT		S4F3N		
4"	4" NH		S4F4	S4FS4	S4FSLH4
4"	4" NPT	S4M4N	S4F4N		
4"	4 1/2" NH			S4FS45	S4FSLH45
4"	5" NH			S4FS5	
5"	2 1/2" NH	S5M25	S5F25		
5"	4" NH	S5M4		S5FS4	S5FSLH4
5"	4 1/2" NH	S5M45	S5F45	S5FS45	S5FSLH45
5"	4" NPT	S5M4N	S5F4N		
5"	5" NH	S5M5	S5F5		
5"	5" NPT		S5F5N		
5"	6" NH	S5M6	S5F6		S5FSLH6
5"	6" NPT	S5M6N	S5F6N		
6"	6" NPT	S6M6N	S6F6N		
5"	6" NPT	S5M6N	S5F6N		S5FSLH

* Lock not included

Features

- Proudly Made in the U.S.A.
- · Hard coated anodized finish
- Lifetime warranty



Storz to Storz

Side 1	Side 2	
5"	2 1/2"	S5S25
5"	4"	S5S4
6"*	5"	S6S5

All storz adapters have two lugs except 6" has three lugs. The Safe Water Drinking Act section 1417 requires "Lead Free" products to be a minimum of 99.75% lead free.



Specifications



Storz Specification	ns		
Storz Size	Lug Spacing	Storz Size	Lug Spacing
1 1/2"	2 1/16"	4"	4 1/2"
2"	2 5/8"	5"	5 13/16"
2 1/2"	3 1/16"	6"* * 3 Lugs	6 5/16"



Camlock Type A, B, C, D, E and F Pressure Ratings							
Size	Male OD	Female ID	Aluminum PSI	HP Alum PSI	Brass PSI	Plastic PSI	316 Stainless PSI
1/2"	15/16"	1"	150		150	125	150
3/4"	1 1/4"	1 5/16"	250		250	125	250
1"	1 7/16"	1 1/2"	250		250	125	250
1 1/4"	1 3/4"	1 7/8"	250		250	100	250
1 1/2"	2 3/32"	2 3/16"	250	750	250	100	250
2"	2 15/32"	2 9/16"	250	750	250	100	250
2 1/2"	3"	3 1/16"	150	750	150		150
3"	3 5/8"	3 11/16"	125		125	60	125
4"	4 11/16"	4 3/4"	100		100	50	100
5"	5"	5 13/16"	75		75		75
6"	6 15/16"	6 14/16"	75		75		75
8"			50		50		50



Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.

Cam & Groove Fittings

Features

- Aluminum, Brass, Plastic, 316 Stainless Steel
- Quick connect
- Type "A" male camlock (Cam & Groove) to female NPT threads









Aluminum

Brass

316 Stainless Steel

Male to Female Threads							
Camlock	Threads	Aluminum	Brass	Plastic	316 Stainless Steel		
1/2"	1/2" NPT	A05M05FN	B05M05FN		S05M05FN		
3/4"	1/2" NPT			P07M05FN			
3/4"	3/4" NPT	A07M07FN	B07M07FN	P07M07FN	S07M07FN		
1"	1" NPT	A10M10FN	B10M10FN	P10M10FN	S10M10FN		
1 1/4"	1 1/4" NPT	A12M12FN	B12M12FN		S12M12FN		
1 1/2"	1 1/4" NPT			P15M12FN			
1 1/2"	1 1/2" NPT	A15M15FN	B15M15FN	P15M15FN	S15M15FN		
2"	1 1/2" NPT	A20M15FN			S20M15FN		
2"	2" NPT	A20M20FN	B20M20FN	P20M20FN	S20M20FN		
2"	3" NPT	A20M30FN			S20M30FN		
2 1/2"	2 1/2" NPT	A25M25FN	B25M25FN		S25M25FN		
3"	2" NPT	A30M20FN			S30M20FN		
3"	3" NPT	A30M30FN	B30M30FN	P30M30FN	S30M30FN		
3"	4" NPT	A30M40FN					
4"	3" NPT	A40M30FN			S40M30FN		
4"	4" NPT	A40M40FN	B40M40FN	P40M40FN	S40M40FN		
4"	6" NPT	A40M60FN					
5"	5" NPT	A50M50FN	B50M50FN				
6"	4" NPT	A60M40FN					
6"	6" NPT	A60M60FN					
8"	8" NPT	A80M80FN					

See page 33 for pressure ratings



Under no circumstances should cam and groove couplings be used for compressed air or steam!



Cam & Groove Fittings

Construction

Features

- Aluminum, Brass, Plastic, 316 Stainless Steel
- Quick connect
- Type "F" male camlock (Cam & Groove) to male NPT threads









Residential

Industrial

316 Stainless Steel

Male to Male Threads							
Camlock	Threads	Aluminum	Brass	Plastic	316 Stainless Steel		
1/2"	1/2" NPT	A05M05MN	B05M05MN		S05M05MN		
3/4"	1/2" NPT			P07M05MN			
3/4"	3/4" NPT	A07M07MN	B07M07MN	P07M07MN	S07M07MN		
1"	1" NPT	A10M10MN	B10M10MN	P10M10MN	S10M10MN		
1 1/4"	1 1/4" NPT	A12M12MN	B12M12MN		S12M12MN		
1 1/2"	1 1/4" NPT			P15M12MN			
1 1/2"	1 1/2" NPT	A15M15MN	B15M15MN	P15M15MN	S15M15MN		
1 1/2"	2" NPT	A15M20MN					
2"	1 1/2" NPT	A20M15MN			S20M15MN		
2"	2" NPT	A20M20MN	B20M20MN	P20M20MN	S20M20MN		
2"	3" NPT	A20M30MN					
2 1/2"	2 1/2" NPT	A25M25MN	B25M25MN		S25M25MN		
3"	1 1/2" NPT	A30M15MN			S30M15MN		
3"	2" NPT	A30M20MN			S30M20MN		
3"	3" NPT	A30M30MN	B30M30MN	P30M30MN	S30M30MN		
3"	4" NPT	A30M40MN					
3"	3" NPT	A30M30MN	B30M30MN	P30M30MN			
3"	4" NPT	A30M40MN					
4"	3" NPT	A40M30MN					
4"	4" NPT	A40M40MN	B40M40MN	P40M40MN			
5"	5" NPT	A50M50MN					
6"	6" NPT	A60M60MN					

See page 33 for pressure ratings



Under no circumstances should cam and groove couplings be used for compressed air or steam!

Cam & Groove Fittings

Features

- Aluminum, Brass, Plastic, 316 Stainless Steel
- Includes Buna Gasket
- Includes Safety Pins
- Quick connect
- Type "B" female camlock (Cam & Groove) to male NPT threads



 Aluminum
 Brass
 Plastic
 316 Stainless Steel

Female to Male Threads							
Camlock	Threads	Aluminum	Brass	Plastic	316 Stainless Steel		
1/2"	1/2" NPT	A05F05MN	B05F05MN		S05F05MN		
3/4"	1/2" NPT			P07F05MN			
3/4"	3/4" NPT	A07F07MN	B07F07MN	P07F07MN	S07F07MN		
1"	1" NPT	A10F10MN	B10F10MN	P10F10MN	S10F10MN		
1 1/4"	1 1/4" NPT	A12F12MN					
1 1/2"	1" NPT	A15F10MN			S15F10MN		
1 1/2"	1 1/4" NPT			P15F12MN			
1 1/2"	1 1/2" NPT	A15F15MN	B15F15MN	P15F15MN	S15F15MN		
2"	1 1/2" NH	A15F15MNH					
2"	1 1/2" NPT	A20F15MN			S20F15MN		
2"	2" NPT	A20F20MN	B20F20MN	P20F20MN	S20F20MN		
2"	3" NPT	A20F30MN					
2 1/2"	2 1/2" NPT	A25F25MN	B25F25MN		S25F25MN		
3"	2" NPT	A30F20MN			S30F20MN		
3"	3" NPT	A30F30MN	B30F30MN	P30F30MN	S30F30MN		
3"	4" NPT	A30F40MN					
4"	3" NPT	A40F30MN			S40F30MN		
4"	4" NPT	A40F40MN	B40F40MN	P40F40MN	S40F40MN		
5"	5" NPT	A50F50MN					
6"	6" NPT	A60F60MN			S60F60MN		

See page 33 for pressure ratings



Under no circumstances should cam and groove couplings be used for compressed air or steam!



Cam & Groove Fittings

Construction

Features

- · Aluminum, Brass, Plastic, 316 Stainless Steel
- Includes Buna Gasket
- Includes Safety Pins
- Quick connect
- Type "D" female camlock (Cam & Groove) to female NPT threads









Industrial

Residential

316 Stainless Steel

Female to F	emale Threads	5			
Camlock	Threads	Aluminum	Brass	Plastic	316 Stainless Steel
1/2"	1/2" NPT	A05F05FN	B05F05FN		S05F05FN
3/4"	1/2" NPT			P07F05FN	
3/4"	3/4" NPT	A07F07FN	B07F07FN	P07F07FN	S07F07FN
1"	1" NPT	A10F10FN	B10F10FN	P10F10FN	S10F10FN
1 1/4"	1 1/4" NPT	A12F12FN	B12F12FN		S12F12FN
1 1/2"	1" NPT	A15F10FN			S15F10FN
1 1/2"	1 1/4" NPT			P15F12FN	
1 1/2"	1 1/2" NPT	A15F15FN	B15F15FN	P15F15FN	S15F15FN
2"	1 1/2" NPT	A20F15FN			S20F15FN
2"	2" NPT	A20F20FN	B20F20FN	P20F20FN	S20F20FN
2 1/2"	2 1/2" NPT	A25F25FN	B25F25FN		S25F25FN
3"	2" NPT	A30F20FN			S30F20FN
3"	3" NPT	A30F30FN	B30F30FN	P30F30FN	S30F30FN
4"	3" NPT	A40F30FN	B40F30FN		S40F30FN
4"	4" NPT	A40F40FN	B40F40FN	P40F40FN	S40F40FN
5"	4" NPT	A50F40FN			
5"	5" NPT	A50F50FN			
6"	4" NPT	A60F40FN			
6"	6" NPT	A60F60FN			S60F60FN

See page 33 for pressure ratings



Under no circumstances should cam and groove couplings be used for compressed air or steam service!

Cam & Groove Fittings

Features

- Aluminum, Brass, Plastic, and 316 Stainless Steel
- Includes Buna Gasket
- Not for pressure
- Type "DC" female camlock (Cam & Groove) dust cap









Aluminum

Brass

316 Stainless Steel

Cam & Groove Caps

Cap Size	Aluminum	Brass	Plastic	316 Stainless Steel
1/2"	A05DC	B05DC		S05DC
3/4"	A07DC	B07DC	P07DC	S07DC
1"	A10DC	B10DC	P10DC	S10DC
1 1/4"	A12DC	B12DC		S12DC
1 1/2"	A15DC	B15DC	P15DC	S15DC
2"	A20DC	B20DC	P20DC	S20DC
2 1/2"	A25DC	B25DC		S25DC
3"	A30DC	B30DC	P30DC	S30DC
4"	A40DC	B40DC	P40DC	S40DC
5"	A50DC			
6"	A60DC			S60DC

Features

- Aluminum, Brass, Plastic, and 316 Stainless Steel
- Not for pressure
- Type "DP" male camlock (Cam & Groove) dust plug



Cam & Groove Plugs Brass Plastic 316 Stainless Steel Plug Size Aluminum 1/2" A05DP B05DP 3/4" A07DP B07DP P07DP S07DP 1" A10DP B10DP P10DP S10DP 1 1/4" A12DP B12DP S12DP 1 1/2" A15DP B15DP P15DP S15DP 2" A20DP B20DP P20DP S20DP 2 1/2" A25DP B25DP S25DP 3" A30DP B30DP P30DP S30DP 4" A40DP B40DP P40DP S40DP A50DP 5" 6" A60DP S60DP



Dust caps and dust plugs are not to be used in pressure applications for safety and environmental reasons.



Features

- Hi-Viz aluminum
- NH / NST fire hose thread
- · Gasket included with female camlocks









Female to Male



Female to Female

Fire Hose Thread Camlocks

Camlock	Threads	Male to Female	Male to Male	Female to Male	Female to Female
1 1/2"	1 1/2" NH	A15M15FNH	A15M15MNH	A15F15MNH	A15F15FNH
2"	1 1/2" NH	A20M15FNH		A20F15MNH	
2"	2 1/2" NH	A20M25FNH	A20M25MNH	A20F25MNH	A20F25FNH
2 1/2"	2 1/2" NH	A25M25FNH	A25M25MNH	A25F25MNH	A25F25FNH
3"	2 1/2" NH	A30M25FNH		A30F25MNH	

See page 33 for pressure ratings

NH threads will only connect to fittings with the same threads.

Features

- Proudly Made in the U.S.A.
- Maximum Operating Pressure 750 psi
- High pressure aluminum





Male to Female



Male to Male Female to Male



Female to Female

High Pressu	re Aluminum				
Camlock	Threads	Male to Female	Male to Male	Female to Male	Female to Female
1 1/2"	1 1/2" NH	AHP15M15FNH		AHP15F15MNH	
1 1/2"	1 1/2" NPT	AHP15M15FN	AHP15M15MN	AHP15F15MN	
2"	1 1/2" NH		AHP20M15MNH		AHP20F15FNH
2"	1 1/2" NPT	AHP20M15FN			AHP20F15FN
2"	2" NPT	AHP20M20FN	AHP20M20MN	AHP20F20MN	AHP20F20FN
2 1/2"	2 1/2" NH	AHP25M25FNH	AHP25M25MNH	AHP25F25MNH	AHP25F25FNH
2 1/2"	2 1/2" NPT				AHP25F25FN

See page 33 for pressure ratings



Cam & Groove Fittings

Features

- Aluminum, Brass, Plastic, and Stainless Steel
- Hose shank
- Type "E" male camlock









Male Camlo	ck to Shank				
Male Camlock	Shank Size	Aluminum	Brass	Plastic	Stainless Steel
1/2"	1/2"	A05M05E	B05M05E		S05M05E
3/4"	3/4"	A07M07E	B07M07E	P07M07E	S07M07E
1"	1"	A10M10E	B10M10E	P10M10E	S10M10E
1 1/4"	1 1/4"	A12M12E	B12M12E		S12M12E
1 1/2"	1 1/2"	A15M15E	B15M15E	P15M15E	S15M15E
2"	2"	A20M20E	B20M20E	P20M20E	S20M20E
2 1/2"	2 1/2"	A25M25E	B25M25E		S25M25E
3"	2"	A30M20E			
3"	3"	A30M30E	B30M30E	P30M30E	S30M30E
4"	3"	A40M30E			
4"	4"	A40M40E	B40M40E	P40M40E	S40M40E
5"	5"	A50M50E			
6"	6"	A60M60E			S60M60E

See page 33 for pressure ratings

Features

- Aluminum, Brass, Plastic, and Stainless Steel
- Includes Safety Pins
- Hose shank
- Type "C" female camlock









Plastic



Stainless Steel

Female Cam	lock to Shank				
Female Camlock	Shank Size	Aluminum	Brass	Plastic	Stainless Steel
1/2"	1/2"	A05F05C	B05F05C		S05F05C
3/4"	3/4"	A07F07C	B07F07C	P07F07C	S07F07C
1"	1"	A10F10C	B10F10C	P10F10C	S10F10C
1 1/4"	1 1/4"	A12F12C	B12F12C		S12F12C
1 1/2"	1 1/2"	A15F15C	B15F15C	P15F15C	S15F15C
2"	1 1/2"	A20F15C			
2"	2"	A20F20C	B20F20C	P20F20C	S20F20C
2 1/2"	2 1/2"	A25F25C	B25F25C		S25F25C
3"	2"	A30F20C			
3"	3"	A30F30C	B30F30C	P30F30C	S30F30C
4"	3"	A40F30C			
4"	4"	A40F40C	B40F40C	P40F40C	S40F40C
5"	5"	A50F50C			
6"	6"	A60F60C			S60F60C

Cam & Groove Fittings

Features

- Aluminum
- Maximum Operating Pressure 150 psi
- Buna gasket included with female camlocks







Female to Male

Male to Male

Female to Female

Aluminum Can	nlock to Camlock			
Camlock	Camlock	Female to Male	Male to Male	Female to Female
1"	1"		A10M10M	
1"	1 1/2"	A10F15M		
1 1/2"	1"	A15F10M		
1 1/2"	1 1/2"		A15M15M	
1 1/2"	2"	A15F20M	A15M20M	
2"	1"	A20F10M		
2"	1 1/2"	A20F15M		
2"	2"		A20M20M	A20F20F
2"	2 1/2"	A20F25M		
2"	3"	A20F30M	A20M30M	
2"	4"	A20F40M	A20M40M	
2 1/2"	3"		A25M30M	
2 1/2"	4"		A25M40M	
3"	1 1/2"	A30F15M		
3"	2"	A30F20M		
3"	2 1/2"	A30F25M		
3"	3"		A30M30M	A30F30F
3"	4"	A30F40M	A30M40M	
3"	6"	A30F60M		
4"	2"	A40F20M		
4"	2 1/2"	A40F25M		
4"	3"	A40F30M		
4"	4"		A40M40M	A40F40F
4"	5"	A40F50M	A40M50M	
4"	6"	A40F60M	A40M60M	A40F60F
5"	3"	A50F30M		
5"	4"	A50F40M		
5"	5"		A50M50M	
5"	6"	A50F60M	A50M60M	
6"	3"	A60F30M		
6"	4"	A60F40M		
6"	5"	A60F50M		
6"	6"		A60M60M	
8"	6"	A80F60M		

Caps, Plugs & Covers

Includes

- Chain
- Gasket











Aluminum

Brass Pin

Brass Rocker

Plastic Rocker

Long Handle

Threaded Caps

	Aluminum Rocker	Brass Pin	Brass Rocker	Plastic Rocker	Long Handle
Cap Size	SKU	SKU	SKU	SKU	
1" NH	ACR1		BCR1		
1" NPSH	ACR1P				
1 1/2" NH	ACR15	BCP15	BCR15	PCR15	
1 1/2" NPSH	ACR15P	BCP15P		PCR15P	
2" NPSH	ACR2P			PCR2P	
2 1/2" NH	ACR25	BCP25	BCR25	PCR25	
2 1/2" NPSH	ACR25P				
3" NH	ACR3			PCR3	
4" NH	ACR4	BCP4			
4 1/2" NH	ACR45	BCP45			
5" NH	ACR5				
6" NH	ACR6	BCP6			ACLH6

NH caps will only connect to fittings with the same threads. NPSH caps will connect to a NPT or NPSH threads.

Includes

- Cable
- · Pressure gasket



Aluminum



Red Aluminum



Aluminum Pentagon Cap



Red Aluminum Pentagon Cap

Storz Caps				
Cap Size	Aluminum	Red Aluminum	Aluminum Pentagon Cap	Red Aluminum Pentagon Cap
1 1/2"	SC15-D			
2 1/2"	SC25-D			
4"	SC4	SC4RD	SNC4	SNC4RD
5"	SC5	SC5RD	SNC5	SNC5RD
6"	SC6-D*			

All storz caps have two lugs except 6" has three lugs.



Caps, Plugs & Covers





Brass Pin Lug



Aluminum Rocker

Plastic

Plugs			
Plug Size	Aluminum Rocker	Brass Pin Lug	Plastic
1 1/2" NH	APR15	BPP15	
2 1/2" NH	A25R25	BPP25	PP25
2 1/2" NH Polished		BPP25-P	
3" NH	APR3	BPP3	
4 1/2" NH	APR45		
5" NH	APR5		
6" NH	APR6	BPP6	

NH plugs will only connect to fittings with the same threads.

Includes

- Chain
- Gasket



Hi-Viz Lime Green (Out of Service)




Red Steel



Plastic

Fire Hydrant Caps			
Size	Hi-Viz Lime Green	Red Steel	Plastic
2 1/2" NH		FHC25	FHC25YL
4 1/2" NH	FHC45LG	FHC45	FHC45YL

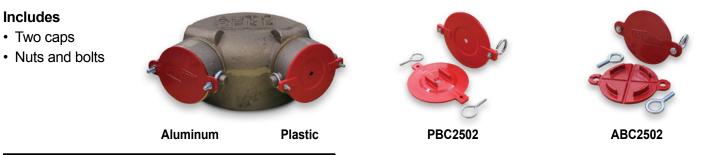

Fire Department Connection Covers			
PBC2502	Plastic 2 1/2" Breakable FDC Cap (2 Pack)		
ABC2502	Aluminum 2 1/2" Breakable FDC Cap (2 Pack)		

Dry Hydrants

Includes

- Plug, chain, screen
- Schedule 40 PVC pipe
- Meet or exceed NFPA









Straight PVC

90 Degree PVC

Adapter (No PVC)

Female Dry	nyurants				
Side 1	Side 2	Straight PVC	45 Degree PVC	90 Degree PVC	Adapter (No PVC)
4 1/2" NH	6" PVC	DHF45600	DHF45645	DHF45690	
5" NH	6" PVC	DHF5600	DHF5645	DHF5690	
6" NH	6" PVC	DHF6600	DHF6645	DHF6690	
4 1/2" NH	6" NPSH				DHF456P
5" NH	6" NPSH				DHF56P
6" NH	6" NPSH				DHF66P

Includes

- Plug, chain, screen
- Schedule 40 PVC pipe
- Meet or exceed NFPA



Straight PVC

90 Degree PVC



Adapter (No PVC)

Male Dry Hydrants							
Side 1	Side 2	Straight PVC	90 Degree PVC	Adapter (No PVC)			
4 1/2" NH	6" PVC	DHM45600	DHM45690				
5" NH	6" PVC	DHM5600	DHM5690				
6" NH	6" PVC	DHM6600	DHM6690				
4 1/2" NH	6" NPSH			DHM456P			
5" NH	6" NPSH			DHM56P			
6" NH	6" NPSH			DHM66P			

Includes

- Plug, chain, screen
- Schedule 40 PVC pipe
- Meet or exceed NFPA

Storz Dry Hydrants



90 Degree PVC



Adapter (No PVC)

Side 1	Side 2	90 Degree PVC	Adapter (No PVC)
4"	6" PVC	DHS4690	
5"	6" PVC	DHS5690	
6"	6" PVC	DHS6690	
5"	6" NPSH		DHS56P

Straight PVC models DO NOT incorporate slip-socket adapter. 45° and 90° PVC models incorporate slip-socket adapter for glue-on connection to a 6"schedule 40 PVC pipe. Adapter (No PVC) models will screw onto any male 6" NPT pipe fitting.



Dry Hydrants

Includes

- Chain
- Gasket



nd Plugs

Caps and Pluys			
Size	Aluminum Cap	Plastic Cap	Aluminum Plug
4 1/2" NH	DHC45RD	DHPC45	DHP45RD
5" NH	DHC5RD	DHPC50	DHP5RD
6" NH	DHC6RD	DHPC60	DHP6RD

Swivel Features

- Material Schedule 40 PVC
- Size 6 inches
- Swivel 360 Degree Rotation



Sign Features

- Reflective Sign 12" x 18"
- Material Metal
- Pre-drilled holes



DHS

DHS6

 Dry Hydrant Accessories

 DHS6
 Full-Time 6" In Line Dry Hydrant Swivel

 DHS
 Reflective Dry Hydrant Sign

Features

- Schedule 40 PVC pipe
- Hole Size 3/8 inch



HSFC6

HSBFC6

Horizontal Strainers

HSFC6	Horizontal 6" PVC Strainer With Fixed Cover
HSBFC6	Horizontal 6" PVC Strainer With Back Flush Cover
HSBFC8	Horizontal 8" PVC Strainer With Back Flush Cover

Couplings & Clamps

Features

- · Material aluminum with a brass swivel nut
- Banding clamps required

Hose Sha	nk Couplings	
FHCS15	Fire Hose Coupling Set 1 1/2" NH	
FHCS25	Fire Hose Coupling Set 2 1/2" NH	

Includes

- Two Storz couplings
- Collars
- Bolts
- · Lock lever

Locking \$	Storz Couplings
SCS4	4" Storz Coupling Set
SCS5	5" Storz Coupling Set
SCS6	6" Storz Coupling Set*

All storz couplings have two lugs except 6" has three lugs.

Features

- UL Listed
- Lock lever
- · Includes cap and chain





SCS5

SFDCEB44NS-UL

FDC Elbow Connection	-	
	bow Co	onnection

SFDCEB44NS-UL	FDC 4" Storz to 4" Female NPT 30 Degree Connection
SFDCEB54NS-UL	FDC 5" Storz to 4" Female NPT 30 Degree Connection

Includes

- One 2 1/2" NH / NST Brass swivel
- One gasket
- · Ball bearings
- One set screw

FDC Replacement Parts

FDCKIT25 Replacement 2.5" NH Brass Swivel Kit



FDCKIT25

FireHoseDirect



Call 888.975.0858



Elbow Connections

Features

- Long handle swivel female
- · Powder coated finish
- · Gasket included





HFE25

Fire Hydrant Flushing Elbows			
HFE25	2 1/2" NH Hydrant Flushing Elbow		
HFE45	4 1/2" NH Hydrant Flushing Elbow		

Features

- Measures psi and approximate gallons per minute (GPM)
- Includes air bleeder valve
- Optional case available
- Swivel Female





HYDPRO100

Fire Hydrant Diffuser					
		Max psi	Max gpm		
HYDPRO100	Fire Hydrant Diffuser 2 1/2" NH (100 psi Gauge)	100	1680		
HYDPRO100WCASE	Fire Hydrant Diffuser 2 1/2" NH (100 psi Gauge) with Case	100	1680		
HYDPRO160	Fire Hydrant Diffuser 2 1/2" NH (160 psi Gauge)	160	2120		
HYDPRO160WCASE	Fire Hydrant Diffuser 2 1/2" NH (160 psi Gauge) with Case	160	2120		



Heavy-Duty Aluminum 45°



Light-Weight Aluminum 45°



Domestic Brass 45°



Brass 45°



Brass 90°

Swive	Swivel Female to Male Elbow							
Inlet	Outlet	Heavy-Duty Aluminum	Light-Weight Aluminum	Domestic Brass 45 Degree	Brass 45 Degree	Brass 90 Degrees		
2 1/2" NH	2 1/2" NH	AHD2545	ALW2545	B2545-D	B2545	B2590		

Flanges



FGS56



FGF45R6





FGM456

T400

Flanges					
Flange Size	Adapter	Storz	Female	Male	ASA Forged
6"	5" Storz	FGS56			
6"	6" Storz*	FGS66*			
6"	4 1/2" Female NH		FGF45R6		
6"	6" Female NH		FGF6R6		
6"	4 1/2" Male NH			FGM456	
6"	6" Male NH			FGM66	
4"	4" NPT				T400
6"	6" NPT				T600

All storz flanges have two lugs except 6" has three lugs. Flanges are raised face ANSI 150 pound.

Features

- Material Neoprene
- Drop-ring type
- Replacement gaskets for flanges



Flange Ga	Flange Gaskets				
		ID	OD	Thickness	
FG3	3" Neoprene Flange Gasket	3 1/2"	5 3/8"	1/16"	
FG4	4" Neoprene Flange Gasket	4 1/2"	5 7/8"	1/16"	
FG5	5" Neoprene Flange Gasket	5 1/2"	7 9/16"	1/16"	
FG6	6" Neoprene Flange Gasket	6 5/8"	8 3/4"	1/16"	
FG8	8" Neoprene Flange Gasket	8 5/8"	11"	1/16"	



Quarter Turn Forestry

Features

- Proudly Made in the U.S.A.
- Heavy-duty forged aluminum
- ULC Listed 1 1/2"







QK075F

QK075M

Quarter Turn Fores			
	Threads	Female	Male
Quarter Turn	GHT Female	QK075F	
Quarter Turn	GHT Male		QK075M
Quarter Turn	1' Female NH	QK10F	
Quarter Turn	1" Male NH		QK10M
Quarter Turn	1" Female NPSH	QK10PF	
Quarter Turn	1" Male NPSH		QK10PM
Quarter Turn	1" Female NPT	QK10NF	
Quarter Turn	1" Male NPT		QK10NM
Quarter Turn	1 1/2" Female NH	QK15F	
Quarter Turn	1 1/2" Male NH		QK15M
Quarter Turn	1 1/2" Female NPSH	QK15PF	
Quarter Turn	1 1/2" Male NPSH		QK15PM
Quarter Turn	1 1/2" Female NPT	QK15NF	
Quarter Turn	1 1/2" Male NPT		QK15NM

Storz Hydrant Converter

Includes

- · Cable and hook
- · Locking set screws



Storz Fire Hydrant Converters

FHC455	Anodized 5" Storz x 4 1/2" NH Fire Hydrant Converter
FHC455NC	Anodized 5" Storz x 4 1/2" NH Fire Hydrant Converter with Nut Cap
FHC455NCRD	Red 5" Storz x 4 1/2" NH Fire Hydrant Converter with Nut Cap





PGRD



BGLG











AFS1PG

Garden H	Garden Hose Nozzles (GHT)	
PGCL	Clear Plastic Garden Hose Nozzle (GHT)	
PGRD	Plastic Red Garden Hose Nozzle (GHT)	
BGLG	Plastic Lime Green Garden Hose Nozzle (GHT)	
BGOG	Plastic Orange Garden Hose Nozzle (GHT)	
ALFGBL	Aluminum Blue Lead Free Garden Hose Nozzle (GHT)	
A75BK	Black Heavy-Duty Nozzle With Bumper (GHT)	
BSBG	Brass Smooth Bore Nozzle (GHT)	
AFS1PG	Aluminum Adjustable Fan Stream Nozzle (GHT / 1" NPSH)	

Compatible with any hose with Garden Hose Threads (GHT)





Garden Hoses	
PGH	Perfect Garden Hose
HDCGH50 Heavy-Duty Contractors Rubber Garden Hose	



BC74



Garden H	Garden Hose Couplings Shanks	
BC74	Brass Garden Hose Coupling Set (1/2" Hose)	
BC75	Brass Garden Hose Coupling Set (5/8" Hose)	
BC76	Brass Garden Hose Coupling Set (3/4" Hose)	
BC78	Brass Garden Hose Coupling Set (1" Hose)	

See page 65 for Brass Ball Valves







Aluminum



Brass



1" Nozzles A1BK Aluminum 1" Black Fire Nozzle (NH) A1LG Aluminum 1" Lime Green Fire Nozzle (NH) A10G Aluminum 1" Orange Fire Nozzle (NH) Aluminum 1" Black Fire Nozzle (NPSH) A1PBK A1PLG Aluminum 1" Lime Green Fire Nozzle (NPSH) A1POG Aluminum 1" Orange Fire Nozzle (NPSH) AFN1 Aluminum 1" Forestry Fire Nozzle (NH) AHF1BK Aluminum 1" Black High-Flow Fire Nozzle (NH) AHF1LG Aluminum 1" Lime Green High-Flow Fire Nozzle (NH) Aluminum 1" Orange High-Flow Fire Nozzle (NH) AHF10G AHF1PBK Aluminum 1" Black High-Flow Fire Nozzle (NPSH) AHF1PLG Aluminum 1" Lime Green High-Flow Fire Nozzle (NPSH) AHF1POG Aluminum 1" Orange High-Flow Fire Nozzle (NPSH) BHD1 Brass 1" Heavy-Duty Industrial Nozzle (NH) BHD1P Brass 1" Heavy-Duty Industrial Nozzle (NPSH) BSB1 Brass 1" Smooth Bore Fire Nozzle (NH) BSB1P Brass 1" Smooth Bore Fire Nozzle (NPSH) P1LG Plastic 1" Lime Green Fire Nozzle (NH) P10G Plastic 1" Orange Fire Nozzle (NH) P1PLG Plastic 1" Lime Green Fire Nozzle (NPSH) P1POG Plastic 1" Orange Fire Nozzle (NPSH) P1PRD Plastic 1" Red Fire Nozzle (NPSH) P1RD Plastic 1" Red Fire Nozzle (NH) PB1LG Plastic 1" Lime Green Fire Nozzle With Bumper (NH) PB10G Plastic 1" Orange Fire Nozzle With Bumper (NH) PB1PLG Plastic 1" Lime Green Fire Nozzle With Bumper (NPSH) PB1POG Plastic 1" Orange Fire Nozzle With Bumper (NPSH) PB1PRD Plastic 1" Red Fire Nozzle With Bumper (NPSH) PB1RD Plastic 1" Red Fire Nozzle With Bumper (NH)

NH Nozzles compatible with NH hoses ONLY. NPSH Nozzles compatible with NPSH or NPT hoses ONLY.







1 1/2" Nozzles

A15LG	Aluminum 1 1/2" Lime Green Fire Nozzle (NH)
A150G	Aluminum 1 1/2" Orange Fire Nozzle (NH)
A15PLG	Aluminum 1 1/2" Lime Green Fire Nozzle (NPSH)
A15POG	Aluminum 1 1/2" Orange Fire Nozzle (NPSH)
A15PRD	Aluminum 1 1/2" Red Fire Nozzle (NPSH)
A15RD	Aluminum 1 1/2" Red Fire Nozzle (NH)
APGCFN15	Aluminum 1 1/2" Constant Flow Fire Nozzle (NH)
APGCFN15P	Aluminum 1 1/2" Constant Flow Fire Nozzle (NPSH)
APGSGHFN15	Aluminum 1 1/2" Heavy-Duty 30 to 125 GPM Fire Nozzle (NH)
ASB15-1	Aluminum 1 1/2" x 1" Orifice Smooth Bore Nozzle (NH)
BHD15	Brass 1 1/2" Heavy-Duty Industrial Fire Nozzle (NH)
BHD15P	Brass 1 1/2" Heavy-Duty Industrial Fire Nozzle (NPSH)
BHP15	Brass 1 1/2" Heavy-Pressure Fire Nozzle (NH)
BHP15P	Brass 1 1/2" Heavy-Pressure Fire Nozzle (NPSH)
BSB15	Brass 1 1/2" Smooth Bore Fire Nozzle (NH)
BSB15P	Brass 1 1/2" Smooth Bore Fire Nozzle (NPSH)
P15LG	Plastic 1 1/2" Lime Green Fire Nozzle (NH)
P150G	Plastic 1 1/2" Orange Fire Nozzle (NH)
P15PLG	Plastic 1 1/2" Lime Green Fire Nozzle (NPSH)
P15POG	Plastic 1 1/2" Orange Fire Nozzle (NPSH)
P15PRD	Plastic 1 1/2" Red Fire Nozzle (NPSH)
P15RD	Plastic 1 1/2" Red Fire Nozzle (NH)
PB15LG	Plastic 1 1/2" Lime Green Fire Nozzle With Bumper (NH)
PB15OG	Plastic 1 1/2" Orange Fire Nozzle With Bumper (NH)
PB15PLG	Plastic 1 1/2" Lime Green Fire Nozzle With Bumper (NPSH)
PB15POG	Plastic 1 1/2" Orange Fire Nozzle With Bumper (NPSH)
PB15PRD	Plastic 1 1/2" Red Fire Nozzle With Bumper (NPSH)
PB15RD	Plastic 1 1/2" Red Fire Nozzle With Bumper (NH)
PSB15	Plastic 1 1/2" Smooth Bore Fire Nozzle (NH)
PSB15P	Plastic 1 1/2" Smooth Bore Fire Nozzle (NPSH)

NH Nozzles compatible with NH hoses ONLY. NPSH Nozzles compatible with NPSH or NPT hoses ONLY.

🦥 FireHoseDirect





ASB25	Aluminum 2 1/2" Smooth Bore Stackable Tip Fire Nozzle (NH)
BHD25	Brass 2 1/2" Heavy-Duty Industrial Fire Nozzle (NH)
BSB25	Brass 2 1/2" Smooth Bore Fire Nozzle (NH)
PB25RD	Plastic 2 1/2" Red Fire Nozzle With Bumper (NH)
PH25RD	Plastic 2 1/2" Red Fire Nozzle With Handles (NH)



ADST15





ATST25







SS25

Stacked	Stacked Tips Nozzles	
ADST15	Aluminum 1 1/2" Double Stacked Tips (NH)	
AQST25	Aluminum 2 1/2" Quad Stacked Tips (NH)	
ATST15	Aluminum 1 1/2" Triple Stacked Tips (NH)	
ATST25	Aluminum 2 1/2" Triple Stacked Tips (NH)	
DPSS11	Aluminum 2 1/2" x 11" Discharge Pipe With Stream Straightener (NH)	
DPSS16	Aluminum 2 1/2" x 16" Discharge Pipe With Stream Straightener (NH)	
SS25	Aluminum 2 1/2" Stream Straightener (NH)	



Camlock No	Camlock Nozzles	
A15CLN15PLG	Aluminum 1 1/2" Lime Green Camlock With Plastic Nozzle	
A15CLN15POG	Aluminum 1 1/2" Orange Camlock With Plastic Nozzle	
A2CLNA15PLG	Aluminum 1 1/2" Lime Green Camlock With Heavy-Duty Nozzle	
A2CLNA15OG	Aluminum 2" Orange Camlock With Heavy-Duty Nozzle	
A2CLNP15OG	Aluminum 2" Orange Camlock With Plastic Nozzle	
A2CLN2PRD	Aluminum 2" Red Camlock With Plastic Nozzle	
P2CLN2PRD	Plastic 2" Red Camlock With Plastic Nozzle	



Features

- Proudly Made in the U.S.A.
- Designed for more efficiency with AFFF
- Combination fog and straight stream nozzle





BUSCG15

BUSCGPG15

U. S. Coast Guard Approved & Navy Nozzles

BUSCG15	Brass U.S. Coast Guard Approved AFFF 1 1/2" Fog Nozzle (NH)
BUSCG15P	Brass U.S. Coast Guard Approved AFFF 1 1/2" Fog Nozzle (NPSH)
BUSCGPG15	Brass U.S. Coast Guard Approved AFFF 1 1/2" Pistol Grip Fog Nozzle (NH)
BUSCGPG15P	Brass U.S. Coast Guard Approved AFFF 1 1/2" Pistol Grip Fog Nozzle (NPSH)

















APG15OG

APGN15

APGSB15

APGSGHFN15

APGSGHFN15-D

PPGN15

Pistol Grip	Nozzles	
APGGN1	Aluminum 1" Fire Nozzle 30 GPM (NH)	
APGGN1P	Aluminum 1" Fire Nozzle 30 GPM (NPSH)	
APGSGN1	Aluminum 1" Heavy-Duty 5 to 40 GPM Fire Nozzle (NH)	
APGSGHFN1	Aluminum 1" Heavy-Duty 13 to 60 GPM Fire Nozzle (NH)	
APGSGN1-D	Akron ProVenger 1" Heavy-Duty 5 to 40 GPM Fire Nozzle (NH)	
APG15LG	Aluminum 1 1/2" Pistol Grip Lime Green Fire Nozzle (NH)	
APG15OG	Aluminum 1 1/2" Pistol Grip Orange Fire Nozzle (NH)	
APGN15	Aluminum 1 1/2" Pistol Grip Fire Nozzle (NH)	
APGN15P	Aluminum 1 1/2" Pistol Grip Fire Nozzle (NPSH)	
APGCFN15	Aluminum 1 1/2" Constant Flow Fire Nozzle (NH)	
APGCFN15P	Aluminum 1 1/2" Constant Flow Fire Nozzle (NPSH)	
APGSGHFN15	Aluminum 1 1/2" Heavy-Duty 30 to 125 GPM Fire Nozzle (NH)	
APGSB15	Aluminum 1 1/2" Pistol Grip Smooth Bore Fire Nozzle (NH)	
APGFGHFN15-D	Akron ProVenger 1 1/2" Heavy-Duty Fixed Gallonage Fire Nozzle (NH)	
APGSGHFN15-D	Akron ProVenger 1 1/2" Heavy-Duty 30 to 150 GPM Fire Nozzle (NH)	
APGCFN25	Aluminum 2 1/2" Constant Flow Fire Nozzle (NH)	
APGSGHFN25	Aluminum 2 1/2" Heavy-Duty 95 to 250 GPM Fire Nozzle (NH)	
PPGN15	Plastic 1 1/2" High Flow Fire Nozzle (NH)	
PPGN15P	Plastic 1 1/2" High Flow Fire Nozzle (NPSH)	







Ball Shut Off with Pistol Grip		
APG1	Aluminum Heavy-Duty 1" Ball Shut-Off With Pistol Grip (NH)	
APG15	Aluminum Heavy-Duty 1 1/2" Ball Shut-Off With Pistol Grip (NH)	
APG15P	Aluminum Heavy-Duty 1 1/2" Ball Shut-Off With Pistol Grip (NPSH)	
PPG15	Plastic 1 1/2" Ball Shut-Off With Pistol Grip (NH)	
PPG15P	Plastic 1 1/2" Ball Shut-Off With Pistol Grip (NPSH)	



Hand Too		
DPW	Drum & Pail Wrench	
VWW	Fire Valve Wheel Wrench	
HB24	24" Halligan Bar	
HB30	30" Halligan Bar	
HB36	36" Halligan Bar	
NYH2	Black 2' New York Hook With Chisel End	
NYH3	Black 3' New York Hook With Chisel End	
NYH4	Black 4' New York Hook With Chisel End	
FHA6	6 Pound Yellow Flat Head Axe	
PHA6	6 Pound Yellow Pick Head Axe	
SH8	8 Pound Yellow Sledge Hammer (36" Handle)	
SH10	10 Pound Yellow Sledge Hammer (36" Handle)	
SH12	12 Pound Yellow Sledge Hammer (36" Handle)	























FHW5H

FHWHD FHWP PFHW FHWSS

FHWS

HDFHWR


FHSW

Fire Hydrant Wrenches

FHW5H	5 Hole Fire Hydrant Wrench	
FHWHD	Heavy-Duty Adjustable Fire Hydrant Wrench	
FHWP	Pigtail Adjustable Hydrant Wrench	
PFHW	Super Spanner Hydrant Wrench	
FHWSS	Single Head Short Adjustable Fire Hydrant Wrench	
FHWS	Adjustable Hydrant Wrench Single Head Spanner	
FHWD	Adjustable Hydrant Wrench Double Head Spanner	
FHWR	Ratcheting Fire Hydrant Wrench	
HDFHWR	Heavy Duty Ratcheting Fire Hydrant Wrench	
FHWR2	EZ Spanner 2-Hole Ratcheting Socket Fire Hydrant Wrench	
FHWR4	EZ Spanner 4-Hole Ratcheting Socket Fire Hydrant Wrench	
FHSW	Adjustable Storz Fire Hydrant Wrench	

WFireHoseDirect



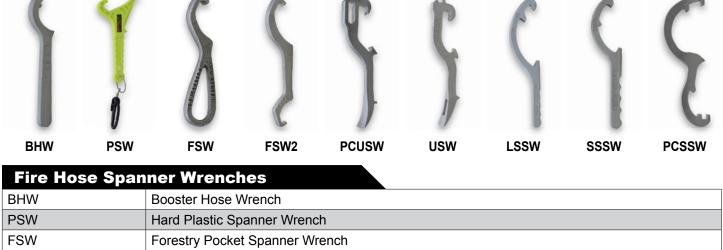

FSW2	Forestry Spanner Wrench	
PCUSW	owder Coated Universal Spanner Wrench	
USW	ire Hose Spanner Wrench	
LSSW	Storz Spanner Wrench Fits 4" to 6" Couplings	
SSSW	Storz Spanner Wrench Fits 1 1/2" to 2 1/2" Couplings	
PCSSW	Powder Coated Storz Spanner Wrench	







DHSWS

2PCUSW









2LSSW

Wrench Holder Sets		
DHSWS	Double Head Hydrant and Spanner Wrench Set	
2PCUSW	Jniversal Spanner Wrench Set	
SHSWS	Single Head Hydrant and Spanner Wrench Set	
SSWS	Storz Hydrant & Spanner Wrench Set	
4PCSSW	Powder Coated Storz Wrench Set	
2LSSW	Storz Spanner Wrench Set	



SDSR



Fire Hose Storage Reel			
		Hose Capacity	
LBHR1	Live 1" Booster Fire Hose Storage Reel	3/4" x 150' or 1" x 100'	
LBHR15	Live 1 1/2" Booster Fire Hose Storage Reel	3/4" x 250' or 1" x 150' or 1 1/2" x 100'	
LBHR15-D	Live 1 1/2" Booster Fire Hose Storage Reel	3/4" x 250' or 1" x 150' or 1 1/2" x 100'	

Dry Hose Storage Reel							
		Si	ngle Jack	ket	Do	uble Jac	ket
		1"	1 1/2"	2"	1"	1 1/2"	2"
LDSR	Large Dry Hose Storage Reel	400'	200'	200'	300'	200'	200'
SDSR	Small Dry Hose Storage Reel	200'	100'	100'	150'	100'	100'

Features

- Proudly Made in the U.S.A.
- 48" W x 43" H x 22" D
- · Red powdercoat finish
- Removable Legs
- Heavy-Duty 16 gauge aluminum
- Weight: 200 lbs.

Fire Equipment Storage Cabinet

Heavy-Duty Fire Equipment Cabinet with 12" Legs LFHC





Call 888.975.0858

WFireHoseDirect

Features

- Heavy-Duty 12 gauge steel
- The curved saddle design avoids sharp bends
- Is suitable for use with fire hose or water hose
- Red powder coat finish



Saddle Hose Racks	
LSHR	Large Saddle Hose Rack
MSHR	Medium Saddle Hose Rack
SSHR	Small Saddle Hose Rack

Features

- Proudly Made in the U.S.A.
- Weatherproof
- Red finish







Fiberglass Fire Cabinets

		Height	Width	Depth
FHC0	Fiberglass 24" Fire Hose Storage Cabinet	24"	18"	6"
FHC1	Fiberglass 30" Fire Hose Storage Cabinet	30"	30"	12"
FHC2	Fiberglass 38" Fire Hose Storage Cabinet	37"	37"	12"

Features

- Proudly Made in the U.S.A.
- · Heavy-duty casters
- Red powdercoat finish








FHC3T8

Fire Hose Racks				
		1 1/2" Hose Capacity	2 1/2" Hose Capacity	
FHC2T6	Two Tier Fire Hose Cart (6 Foot)	45 sections of 1 1/2" x 50' double jacket hose	30 sections of 2 1/2" x 50'	
FHC3T6	Three Tier Fire Hose Cart (6 Foot)	66 sections of 1 1/2" x 50' double jacket hose	45 sections of 2 1/2" x 50'	
FHC2T8	Two Tier Fire Hose Cart (8 Foot)	60 sections of 1 1/2" x 50' double jacket hose	40 sections of 2 1/2" x 50'	
FHC3T8	Three Tier Fire Hose Cart (8 Foot)	90 sections of 1 1/2" x 50' double jacket hose	60 sections of 2 1/2" x 50'	

Features


- · Stores collapsible hose on drum to avoid damage from kinking for a long hose life
- Included hardware allows pivot mounting
- Durable all-steel construction
- · Sides are open to allow hose to dry faster
- · Finish is lime green or orange powdercoat
- Wall mounting bolts not included

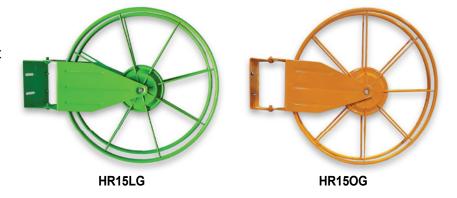

Swing Ty	Swing Type Hose Reels	
HR15LG	Lime Green Large Fire Hose Storage Reel	
HR15OG	Orange Large Fire Hose Storage Reel	
HR25LG	Lime Green Ex-Large Fire Hose Storage Reel	
HR25OG	Orange Ex-Large Fire Hose Storage Reel	

Kit Includes

- 1 White single jacket 1 1/2" x 100' with aluminum couplings
- 1 Mounting bracket (bolts not included)
- 1 Aluminum nozzle
- 1 Hose reel

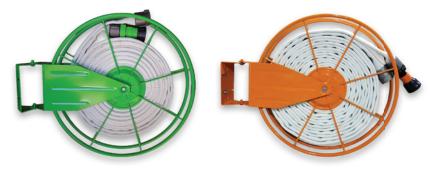

Lime Green Reel Kit

Orange Reel Kit

Swing Reel Kits				
HR15LGK Lime Green Large Fire Hose Storage Reel Kit (NH Threads)				
HR150GK	Orange Large Fire Hose Storage Reel Kit (NH Threads)			
HR15PLGK	5PLGK Lime Green Large Fire Hose Storage Reel Kit (NPSH Threads)			
HR15POGK	POGK Orange Large Fire Hose Storage Reel Kit (NPSH Threads)			





Features

• Hose Reel - Proudly Made in the U.S.A.

Includes

- 100' Booster hose
- Flexible 5' supply hose
- Brass adapter
- Hose reel

Fire Hose Storage Reels Kits				
LBHR15K	Live 1 1/2" Booster Fire Hose Storage Reel Kit			
LBHR1K	ive 1" Booster Fire Hose Storage Reel Kit			
LBHRGK	Live 3/4" Booster Fire Hose Storage Reel Kit			
LLWBHR1KRD	Live 1" Red Lightweight Booster Hose Storage Reel Kit			
LLWBHR1KYL	Live 1" Yellow Lightweight Booster Hose Storage Reel Kit			

Custom hose lengths available



FHR	12	FHB3	FHDCR4	FHDCR1	
Fire Hose	Ramps				
HDFHR10	Heavy-Duty Fire Hose Ramps - 2 1/2" Hoses				
FHR12	Fire Hose Ramps - 2 1/2" Hoses				
FHB3	Dual Channel Hose Bridge - 3" Hoses				
FHDCR1	Dual Channel Hose Ramps - 2 1/2" Hoses				
FHDCR4	Dual Channel Hose Ramp - 4" Hoses				

Features

- Proudly Made in the U.S.A.
- Power Source 110 volts
- Max psi 500 psi
- Max GPM in pressure mode 3 GPM
- Gauges Stainless liquid filled
- Meets NFPA 1962.7 and RMA standards





Fire Hose	Fire Hose Tester		
ELFHT	Two Outlet 3 GPM 500 psi Electric Fire Hose Tester		
EFHT4	Four Outlet 3 GPM 500 psi Electric Fire Hose Tester		





FE10







HDFECL10RD

Fire Extinguishers and Cabinets				
FE05	Commercial Grade Fire Extinguisher 5 Pound ABC Dry Chemical			
FE10	Commercial Grade Fire Extinguisher 10 Pound ABC Dry Chemical			
FE20	Commercial Grade Fire Extinguisher 20 Pound ABC Dry Chemical			
FE25	Fire Extinguisher 2 1/2 Gallon Water Can			
HDFEC10RD	Red Heavy-Duty Plastic Fire Extinguisher Cabinet (Holds up to a 10 pound fire extinguisher)			
HDFECL10RD	Red Heavy-Duty Plastic Fire Extinguisher Cabinet With Lock (Holds up to a 10 pound fire extinguisher)			



Features

- Material aluminum
- Inlet 2.5 inches NH
- Maximum hose size 3 inches





Fire Hose Washer			FNV	
FHW	Fire Hose Washer			



LPD-250ALUM



LPD-250



LPD-CHLOR

Dechlorination Equipment			
LPD-250ALUM	-250ALUM Aluminum 2 1/2" NH / NST Dechlorinating Diffuser		
LPD-250	Steel 2 1/2" NH / NST Dechlorinating Diffuser		
LPD-CHLOR	Dechlorination Tablets		

Features

- Dry lubricant for both storz and threaded couplings
- · Lubricates gaskets for longer life and easier use
- · Environmentally friendly and contains no grease
- Spray bottle adjusts to stream or spray for application





ST2-12OZ	Storz Spray Lubricant			
ST2	Storz Lubricant (12 x 2 oz Bottles)			

Features

• Inlet - swivel female 2 1/2" NH

Storz Sprav Lubricant


- Outlet female 2" Pipe Thread (NPT)
- Maximum PSI 175

Back Flow Preventer

			The second se
2	scotty	25	51.
0	Charles Berghandreite	0	



BFP250 Backflow Preventer 2 1/2" FM NH Inlet to 2" FM NPT Outlet

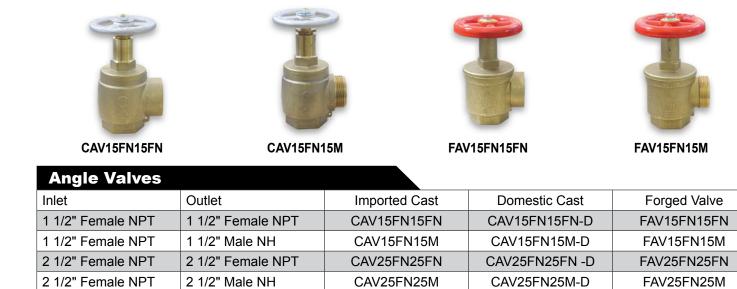













BHGV25

U	v	-	J	v	5		

AHGV25OG

Gate Valves

AHDHGV25LG	Heavy-Duty Lime Green Aluminum 2 1/2" Fire Hydrant Gate Valve		
AHDHGV25OG	Heavy-Duty Orange Aluminum 2 1/2" Fire Hydrant Gate Valve		
AHGV25LG	Heavy-Duty Orange Aluminum 2 1/2" Fire Hydrant Gate Valve		
AHGV25OG	Heavy-Duty Orange Aluminum 2 1/2" Fire Hydrant Gate Valve		
AHGV25RD	Red Aluminum Fire Hydrant Gate Valve		
BHGV25	Brass Fire Hydrant Gate Valve		

Features

- Material brass
- Swivel inlet
- · Gasket included







Plain Wye	e Valves
PW15150G	Plain Wye 1 1/2" NH Inlet x (2) 1 1/2" NH Outlet
PW2515OG	Plain Wye 2 1/2" NH Inlet x (2) 1 1/2" NH Outlet
PW2525OG	Plain Wye 2 1/2" NH Inlet x (2) 2 1/2" NH Outlet





ABV1515	-D AHDBV2525	ABV2515-D	AHGV25		
Aluminum	Ball Valves				
ABV1515-D	Aluminum 1 1/2" NH Inlet X (2) 1 1/2" NH 0	Outlet			
ABV1515RD	Aluminum Red 1 1/2" NH Inlet x (2) 1 1/2"				
ABV15P15P-D	Aluminum 1 1/2" NPSH Inlet x (2) 1 1/2" N	PSH Outlet			
ABV15P15PRD	Aluminum Red 1 1/2" NPSH Inlet x (2) 1 1	Aluminum Red 1 1/2" NPSH Inlet x (2) 1 1/2" NPSH Outlet			
ABV2515	Aluminum 2 1/2" NH Inlet X (2) 1 1/2" NH Outlet				
ABV2515-D	Aluminum 2 1/2" NH Inlet X (2) 1 1/2" NH Outlet				
ABV2525	Aluminum 2 1/2" NH Inlet x (2) 2 1/2" NH Outlet				
ABV25P15P	Aluminum 2 1/2" NPSH Inlet X (2) 1 1/2" NPSH Outlet				
ABV25P15P-D	Aluminum 2 1/2" NH Inlet X (2) 1 1/2" NPSH Outlet				
ABV425	Aluminum 4" Storz Inlet x (2) 2 1/2" NH Outlet				
ABV44	Aluminum 4" Storz Inlet x (2) 4" Storz Outlet				
ABV4525	Aluminum 4 1/2" NH Inlet x (2) 2 1/2" NH Outlet				
ABV525	Aluminum 5" Storz Inlet x (2) 2 1/2" NH Outlet				
ABV55	Aluminum 5" Storz Inlet x (2) 5" Storz Outlet				
ABV66	Aluminum 6" Storz Inlet x (2) 6" Storz Outlet				
AHDBV2515	Aluminum Heavy-Duty 2 1/2" NH Inlet X (2) 1 1/2" NH Outlet				
AHDBV2525	Aluminum Heavy-Duty 2 1/2" NH Inlet X (2) 2 1/2" NH Outlet				
HBV25	Fire Hydrant Ball Valve				





BBV2515LG



BBV2515OG





Brass Ball Valves

BBV1515	Brass 1 1/2" NH Inlet x (2) 1 1/2" NH Outlet
BBV152G	Brass 1 1/2" NH Inlet x (2) GHT Outlet
BBV154G	Brass 1 1/2" NH Inlet x (4) GHT Outlet
BBV15P2G	Brass 1 1/2" NPSH Inlet x (2) GHT Outlet
BBV15P4G	Brass 1 1/2" NPSH Inlet x (4) GHT Outlet
BBV2515	Brass Red 2 1/2" NH Inlet x (2) 1 1/2" NH Outlet
BBV2515LG	Brass Lime Green 2 1/2" NH Inlet x (2) 1 1/2" NH Outlet
BBV2515OG	Brass Orange 2 1/2" NH Inlet x (2) 1 1/2" NH Outlet
BBV252G	Brass 2 1/2" NH Inlet x (2) GHT Outlet
BBV254G	Brass 2 1/2" NH Inlet x (4) GHT Inlet
BBVG2G	Brass GHT Inlet x (2) GHT Outlet
BBVG4G	Brass GHT Inlet x (4) GHT Outlet

Features

- · Liquid fill gauges
- · Gasket included







CGLH25

CGP25

Cap Gaug	es
CGR15	Aluminum Swivel 1 1/2" NH Cap Gauge With Bleeder Valve (300 psi)
CGLH25	Aluminum 2 1/2" NH Long Handle Cap Gauge With Bleeder Valve (160 psi)
CGP25	Aluminum 2 1/2" NH Pin Lug Cap Gauge With Bleeder Valve (160 psi)
CGR25	Aluminum Swivel 2 1/2" NH Cap Gauge With Bleeder Valve (300 psi)

* Note - For testing static pressure only.

Features

- Proudly Made in the U.S.A.
- Liquid fill gauges
- Maximum psi 300 psi
- Swivel female
- · Gasket included



ELG25



LG25

In-Line Ga	auges
ELG25	Aluminum Encased 2 1/2" NH Line Gauge
LG15	Aluminum 1 1/2" NH Threaded Line Gauge
LG25	Aluminum 2 1/2" NH Threaded Line Gauge

* Note - For testing static pressure only.

Made in the U.S.A.

Features

- Material aluminum
- Maximum psi 300 psi
- Gasket included



TC15



TCP25

Test Cap	
TC15	Aluminum 1 1/2" NH Test Cap
TC25	Aluminum 2 1/2" NH Test Cap
TC45	Aluminum 4 1/2" NH Test Cap
TCP15	Aluminum 1 1/2" NH Cap With Petcock
TCP25	Aluminum 2 1/2" NH Cap With Petcock



Call 888.975.0858











Hose Gasket

Nozzle Gasket

Camlock Gasket Storz Pressure Gasket

Storz Suction Gasket

Fire Hose	& Adapter Gaskets
	0.

SKU	Size	Inside Diameter	Outside Diameter	Thickness
SW1	1" NH / NPSH Gasket	1 1/16"	1 7/16"	1/8"
SW15	1 1/2" NH / NPSH Gasket	1 9/16"	2 1/16"	1/8"
SW2	2" NH / NPSH Gasket	2 3/32"	2 11/16"	1/8"
SW25	2 1/2" NH / NPSH Gasket	2 1/2"	3 7/32"	3/16"
SW3	3" NH / NPSH Gasket	3 1/16"	3 3/4"	1/4"
SW4	4" NH / NPSH Gasket	4 1/16"	5 1/8"	1/4"
SW45	4 1/2" NH / NPSH Gasket	4 9/16"	5 7/8"	1/4"
SW5	5" NH / NPSH Gasket	5 3/32"	6 13/32"	1/4"
SW6	6" NH / NPSH Gasket	6 1/16"	7 1/8"	1/4"

Nozzle Gaskets					
NG1	1" NH / NPSH Nozzle Gasket	3/32"	1 1/4"	1/8"	
NG15	1 1/2" NH Nozzle Gasket	1 1/2"	1 29/32"	1/8"	
NG15P	1 1/2" NPSH Nozzle Gasket	11 5/16"	1 7/8"	1/8"	
NG2P	2" NPSH Nozzle Gasket	1 11/16"	2 11/32"	5/32"	
NG25	2 1/2" NH Nozzle Gasket	2 1/4"	3"	3/16"	

Camlock	Gaskets			
CG05	1/2" Camlock Gasket	11/16"	1 1/32"	5/32"
CG075	3/4" Camlock Gasket	7/8"	1 3/8"	7/32"
CG1	1" Camlock Gasket	1 1/16"	1 1/2"	1/4"
CG125	1 1/4" Camlock Gasket	1 3/8"	1 15/16"	1/4"
CG15	1 1/2" Camlock Gasket	1 5/8"	2 3/16"	1/4"
CG2	2" Camlock Gasket	2"	2 5/8"	1/4"
CG25	2 1/2" Camlock Gasket	2 3/8"	3 1/8"	1/4"
CG3	3" Camlock Gasket	3"	3 3/4"	1/4"
CG4	4" Camlock Gasket	4"	4 7/8"	1/4"
CG5	5" Camlock Gasket	4 7/8"	5 15/16"	1/4"
CG6	6" Camlock Gasket	6"	7 1/16"	1/4"

Storz Gaskets

	Pressure Gasket	Suction Gasket	Inside Diameter	Pressure OD	Suction OD	Thickness
4" Storz Gasket	SPG4	SSG4	3 5/8"	4 1/4"	4 7/16"	13/32"
5" Storz Gasket	SPG5	SSG5	4 5/8"	5 15/32"	5 11/16"	1/2"
6" Storz Gasket	SPG6	SSG6	5 3/16"	6"	6 3/16"	15/32"



Strainers			
Size	Round Aluminum	Round Plastic	Barrel Aluminum
2 1/2" NH			ABS25
3" NH	ABS3-D		ABS3
4 1/2" NH	ABS45-D		ABS45
5" NH	ABS5-D		ABS5
6" NH Big Water			ABS6BW
1 1/2" NPT		PBS15N	
2" NPT		PBS2N	
3" NPT		PBS3N	

Features

- Material aluminum
- Check valve included
- · Gasket included





BS25FV



BS2PFV

Foot Valve Strainers		
BS15FV	Aluminum 1 1/2" NH Barrel Strainer with Foot Valve	
BS2PFV	Aluminum 2" NPSH Barrel Strainer with Foot Valve	
BS25FV	Aluminum 2 1/2" NH Barrel Strainer with Foot Valve	
BS3FV	Aluminum 3" NH Barrel Strainer with Foot Valve	
BS3PFV	Aluminum 3" NPSH Barrel Strainer with Foot Valve	
BS4FV	Aluminum 4" NH Barrel Strainer with Foot Valve	
BS45FV	Aluminum 4 1/2" NH Barrel Strainer with Foot Valve	
BS5FV	Aluminum 5" NH Barrel Strainer with Foot Valve	
BS6FV	Aluminum 6" NH Barrel Strainer with Foot Valve	

W FireHoseDirect

Features

- Proudly Made in the U.S.A.
- Red powdercoat finish
- Full time swiveling strainer
- Vortex shield protects against whirlpooling

Made in the U.S.A.

Made in the U.S.A.

Fire





FS45

Self Leveling Floating Strainers			
FS25	Aluminum 2 1/2" NH Self Leveling Floating Strainer		
FS3	Aluminum 3" NH Self Leveling Floating Strainer		
FS4	Aluminum 4" NH Self Leveling Floating Strainer		
FS45	Aluminum 4 1/2" NH Self Leveling Floating Strainer		
FS5	Aluminum 5" NH Self Leveling Floating Strainer		
FS6	Aluminum 6" NH Self Leveling Floating Strainer		
FS6BW	Aluminum 6" NH Big Water Self Leveling Floating Strainer		

Features

- Proudly Made in the U.S.A.
- Meets NFPA standards
- Pivoting adjustable elbow
- Lightweight aluminum alloy



Low Leve	el Strainers	
LLS25	Aluminum 2 1/2" NH Low Level Strainer	
LLS3	Aluminum 3" NH Low Level Strainer	
LLS4	Aluminum 4" NH Low Level Strainer	
LLS45	Aluminum 4 1/2" NH Low Level Strainer	
LLS5	Aluminum 5" NH Low Level Strainer	
LLS6	Aluminum 6" NH Low Level Strainer	
LLS6BW	Aluminum 6" NH Big Water Low Level Strainer	

RPMBL-45		RPMRD-50	RPMWH-50	RPMAB-50
Reflective	Reflective Road Markers			
RPMBL-45	Peel-N-Stick Blue Reflective Road Marker (45 Pack)			
RPMRD-50	Peel-N-Stick Red Reflective Road Marker (50 Pack)			
RPMWH-50	Peel-N-Stick White Reflective Road Marker (50 Pack)			
RPMAB-50	Peel-N-Stick Amber Reflective Road Marker (50 Pack)			



Fire Hydrant Markers			
FBHT	Flat Bracket Fire Hydrant Tag (Custom Numbering Available)		
LBHT	"L" Bracket Hydrant Tag (Custom Numbering Available)		
FHC45LG	Hi-Viz 4 1/2" NH / NST Fire Hydrant Cap (Out of Service)		
FHC	Hydrant Cover (Out of Service)		



Fire Hydrant Markers

SMFHMP	Side Mount Fiberglass Hydrant Marker - Plastic Bracket	
SMFHMS	Side Mount Fiberglass Hydrant Marker - Steel Bracket	
SMSHM	Side Mount Steel Hydrant Marker	
TMFHMP	Top Mount Fiberglass Hydrant Marker - Plastic Bracket	
TMFHMS	Top Mount Fiberglass Hydrant Marker - Steel Bracket	
TMSHMS	Top Mount Steel Hydrant Marker - Steel Bracket	



Features

- Material brass
- Max pressure 300 psi
- Hydrostatically tested
- Used to provide a fire department outlet connection

Fire

• Pentagon nut at top of spindle discourages unauthorized use



Wharf Hydrants

SKU	Product Description	Height Open	Height Closed
WH3N25	Wharf Hydrant 3" Female NPT x 2 1/2" Male NH	16 3/8"	14 1/4"
WH4N25	Wharf Hydrant 4" Female NPT x 2 1/2" Male NH	16 3/8"	14 1/4"
WH4N45	Wharf Hydrant 4" Female NPT x 4 1/2" Male NH	18 1/8"	15 5/8"

Wharf Hydrant Accessories		
WHHW	Handwheel for Wharf Hydrant Valve	
WHN	Pentagon Hex Nut for Wharf Hydrant Valve	

Features

- Proudly Made in the U.S.A.
- Material aluminum
- Pre-drilled holes



MMP15



SMP5

Mounting Plates			
Product Description	Swivel Female	Male	Storz
1" Mounting Plate (NH)	SFMP1		
1 1/2" Mounting Plate (NH)	SFMP15	MMP15	
2 1/2" Mounting Plate (NH)	SFMP25	MMP25	
4" Mounting Plate (NH)		MMP4	SMP4
4 1/2" Mounting Plate (NH)		MMP45	
5" Mounting Plate			SMP5



SAME DAY SHIPPING COMPANY