



A Moen Incorporated Brand

Model: **40311NHCBN**  
**40314NHC**  
**40315NHC**



# CORNERSTONE™



## No Head Trims for Pressure Balancing Cycling In-Wall Valve

### DESCRIPTION

- Metal construction with chrome plated or LifeShine® Brushed Nickel finishes
- 40311NHC/CBN–tub/shower trim w/ slip fit tub spout
- 40315NHC–shower only trim
- 40314NHC–tub/shower trim w/ IPS tub spout
- Twelve (12) individual boxes per master carton

### OPERATION

- Rotating style metal lever blade handle
- Temperature control by 150° arc
- Will operate with less than 5 lbs of torque
- Stainless steel escutcheon features red and blue molded in color, heat staked temperature indicators that withstand harsh abrasive
- Protective gaskets surround interior and exterior rim
- Weep hole located at bottom of escutcheon
- Slip fit tub spout connects to 1/2" pipe with bottom 5/32" set screw

### STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- IAPMO Green Listed
- Features red/blue hot/cold temperature indicators
- **ADA** for lever handle


### WARRANTY — RESIDENTIAL, COMMERCIAL

- Ten (10) year limited warranty against defects in materials and manufacturing workmanship
- Refer to the installation instructions enclosed with each CFG product or call 1-888-450-4910 for complete warranty information


### IN-WALL VALVE SOLD SEPARATELY

- 45311 CC/Male IPS with stops
- 45312 CC/Male IPS
- 45317 Female IPS with stops
- 45318 Female IPS
- 45319 PEX connections
- 45320 PEX connections with stops
- 45321 CPVC with stops

### CRITICAL DIMENSIONS

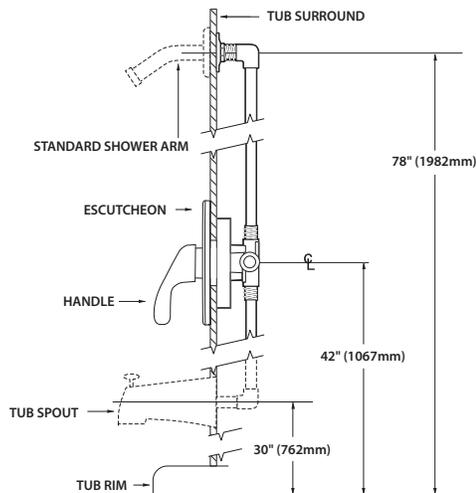

THIN WALL

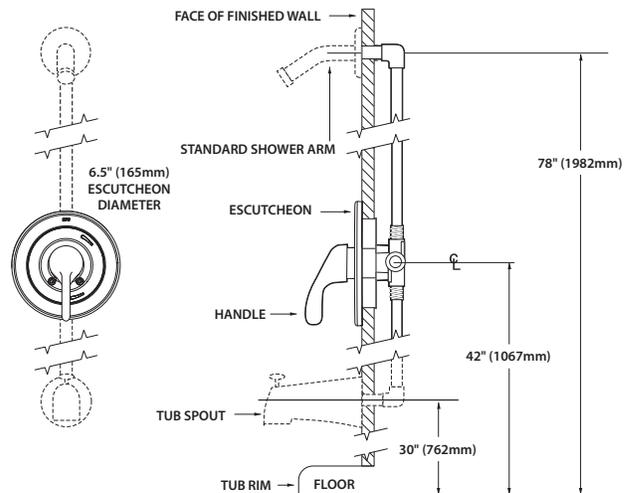

THICK WALL