

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general LED illumination in many application types. Ideal for use in foyers, corridors, hallways, bedrooms, offices, utility work areas, stairways and many other light commercial or residential settings. Fixture can be left on for continuous 24/7 hour operation.

CONSTRUCTION

Contemporary style fixture. Twin steel rings surround a dropped durable, milk-white acrylic diffuser. Complemented with matching trim in either a brushed nickel or antique bronze finish. Diffuser provides widespread illumination.

Available in two sizes: 13" or 16" diameters. Fixture can be flush or semi-flush mounted using the pendant mounting kit (ordered separately). Removable twin steel rings provide easy access for cleaning.

OPTICS

13" units produce 1,000 lumens and 16" units produce 1,500 lumens, both at 50,000 hours life.

ELECTRICAL

Long-life LEDs provide extended service life and are rated to deliver L70 performance at 50,000 hours.

Fixture operates at 120 volts, 60Hz. 13" unit standard input = 16 watts, 63 lumens per watt. 16" unit standard input = 24 watts, 63 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included.

LISTINGS

CUL Listed to US and Canadian safety standards and suitable for damp locations. ENERGY STAR® certified.

WARRANTY

5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Specifications subject to change without notice.

Decorative Indoor

LED Saturn

Flush/Semi-Flush Mount




HIGH PERFORMANCE LED



DIMENSIONS				
Nominal size	Model number	Mounting configuration	(A) Width inches (cm)	(B) Pendant kit inches (cm)
13" dia	FMSATL 13	Flush	13 (30.5)	3-1/8 (7.9)
		Semi-flush*		8-3/8 (21.3)
16" dia	FMSATL 16	Flush	16 (40.6)	3-3/8 (9.5)
		Semi-flush*		9-1/8 (23.2)

*Requires pendant kit. See Accessories/Replacement parts below.
All dimensions are inches (centimeters) unless otherwise indicated.

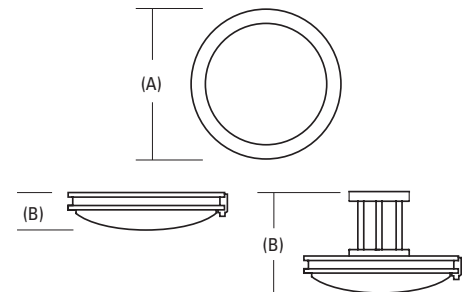

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMSATL 13 20840 BN

Series	Size	CRI	Color temperature	Finish
FMSATL LED flush mount	13 13"	208 >80	40 4000 K	BN Brushed nickel
	16 16"		35 3500 K	BZA Antique bronze
			30 3000 K	
			27 2700 K	

Accessories/Replacement parts: Order as separate catalog number.	
DSATL13	13" acrylic diffuser
DSATL16	16" acrylic diffuser
PKSATL BN	Pendant mounting kit, brushed nickel
PKSATL BZA	Pendant mounting kit, antique bronze

LED Saturn Flush/Semi-Flush Mount

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

SUGGESTED DIMMERS

The FMLRL is designed to operate with most standard Triac Based (Forward Phase-Control or Leading Edge) dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120