


SPECIFICATIONS

AERATOR KIT 0.5GPM SPRAY JUNIOR MALE

Description

- Flow rate at 0.5 gallon per minute
- Spray flow pattern
- Insert provided by Neoperl (A5.9035.0.0001)
- Pressure compensating between 20 psi and 80 psi
- Printed with "A112.18.1M, 0.5 GPM(1.9 L/min) Max"
- Manufactured to Meet NSF/ANSI 372 Requirements

Flow Rate

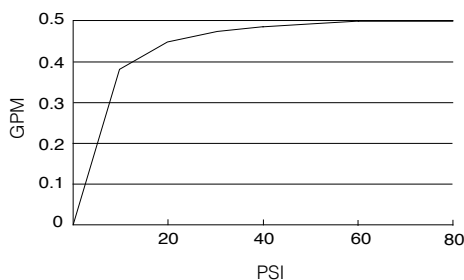

Standards

MEETS ASME
A112.18.1M/ A112.18.1



• ASME A112.18.1M/ A112.18.1

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

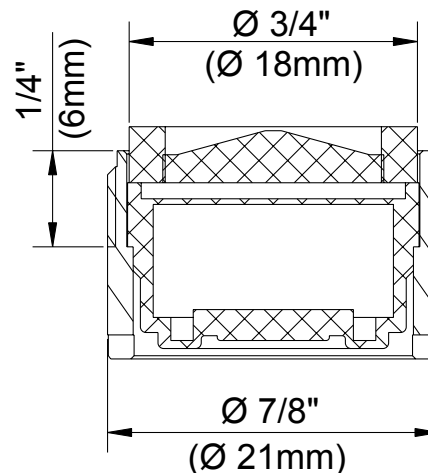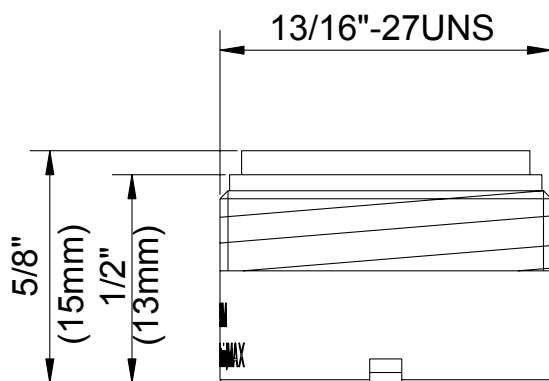

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____