



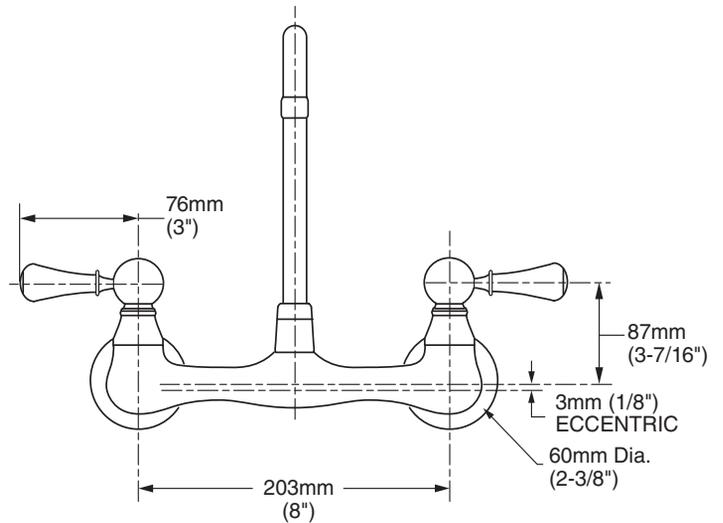

7293.252 Shown

**MODEL NUMBER:**

- ☐ **7293.252 Wall-Mount Sink Faucet**  
 Gooseneck swivel spout. Porcelain Lever Handles.
- ☐ **7293.252.F15 Wall-Mount Sink Faucet**  
 Gooseneck swivel spout. Porcelain Lever Handles.

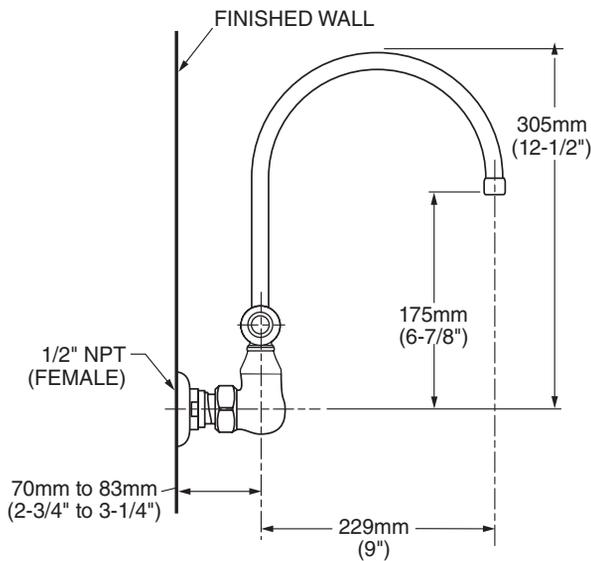

**GENERAL DESCRIPTION:**

Durable brass construction throughout. Amaris 1/4 turn washerless ceramic disc valve cartridges. One-half inch NPT female inlets with brass coupling nuts. Brass gooseneck swivel spout (360° rotation). 2.2 gpm/8.3 L/min. maximum flow rate, 1.5 gpm/5.7 L/min, maximum flow rate for F15 models.

**PRODUCT FEATURES:**

- Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.
- Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.


**SUGGESTED SPECIFICATION:**

Wall-mount sink faucet shall be cast brass construction with all brass coupling nuts. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model #7293.252.\_\_\_\_.\_\_\_\_.


**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B 125**
- NSF 61/Section 9 & Annex G**

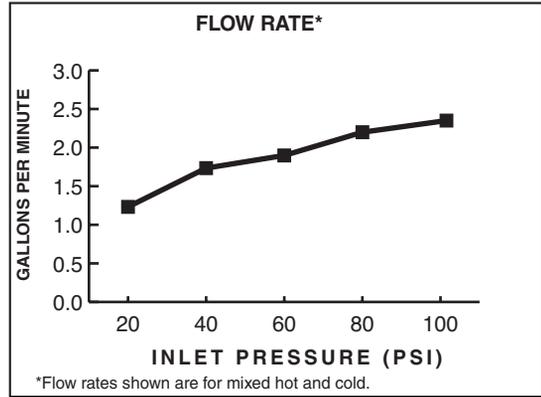

**2.2 gpm/8.3 L/min. FLOW RATE**

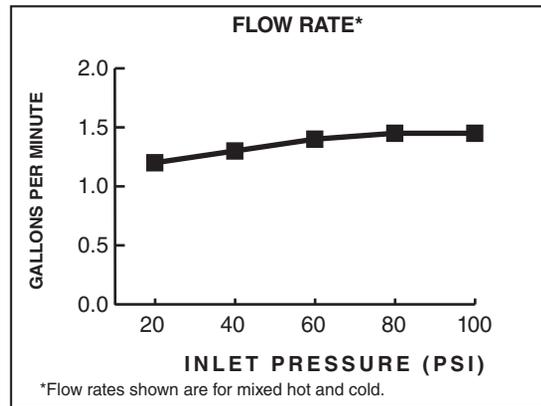

**1.5 gpm/5.7 L/min. FLOW RATE**

Product Number	Description	Finish
		Polished Chrome
		002
7293.252	Wall-Mount Sink Faucet. Brass Gooseneck Spout - 2.2 gpm/8.3 L/min. maximum flow rate	
7293.252.F15	Wall-Mount Sink Faucet. Brass Gooseneck Spout - 1.5 gpm/5.7 L/min. maximum flow rate	

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.