



# Low-lead Dielectric Nipple PFXDN Series


## Product Features

- Zinc plated
- Polypropylene plastic liner
- Metal-to-metal design
- Pressure up to 300 psi/temperature up to 230° F (110°C)
- Materials meet the requirements of ASTM F1545-15
- Certifications: NSF/ANSI 61, NSF/ANSI 372, IAPMO/UPC listed
- TxT / GxT: Steel pipe conforming to ASTM A53 Grade B
- NPT thread meets ANSI/ASME B1.20.1
- GxG: Ductile iron ASTM A536, Grade 65-45-12 compliant




Model Series	Ø1	Ø2
PFXDNTxx	NPT	NPT
PFXDNGxx	GROOVE, IPS	GROOVE, CTS
PFXDNGTxx	GROOVE, IPS	NPT

## Groove x Groove




Model #	Size	Ø1 (in)	Ø2 (in)	L (in)
PFXDNGKP	2" x 4"	2.375	2.125	4.17
PFXDNGKP	2-1/2" x 6"	2.875	2.625	6.18
PFXDNGMU	3" x 6"	3.5	3.125	6.18
PFXDNGPU	4" x 6"	4.5	4.125	6.18
PFXDNGUU	6" x 6"	6.625	6.125	6.18

## Thread x Thread

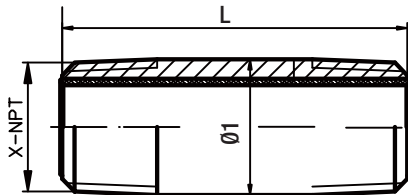

Model #	Size	X-NPT	Ø1 (in)	L (in)
PFXDNTDM	1/2" x 3"	1/2" - 14 NPT	0.84	3
PFXDNTFM	3/4" x 3"	3/4" - 14 NPT	1.05	3
PFXDNTGP	1" x 4"	1" - 11.5 NPT	1.315	4
PFXDNTHP	1-1/4" x 4"	1-1/4" - 11.5 NPT	1.66	4
PFXDNTJP	1-1/2" x 4"	1-1/2" - 11.5 NPT	1.9	4
PFXDNTKP	2" x 4"	2" - 11.5 NPT	2.375	4
PFXDNTLU	2-1/2" x 6"	2-1/2" - 8 NPT	2.875	6
PFXDNTMU	3" x 6"	3" - 8 NPT	3.5	6
PFXDNTPU	4" x 6"	4" - 8 NPT	4.5	6

## Groove x Thread

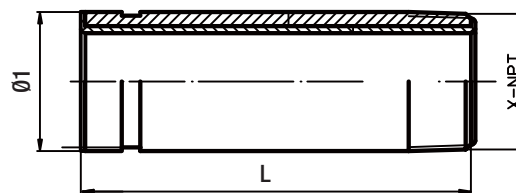

Model #	Size	X-NPT	Ø1 (in)	L (in)
PFXDNGTGP	1" x 4"	1" - 11.5 NPT	1.315	4
PFXDNGTHP	1-1/4" x 4"	1-1/4" - 11.5 NPT	1.66	4
PFXDNGTJP	1-1/2" x 4"	1-1/2" - 11.5 NPT	1.9	4
PFXDNGTKP	2" x 4"	2" - 11.5 NPT	2.375	4
PFXDNGTLU	2-1/2" x 6"	2-1/2" - 8 NPT	2.875	6
PFXDNGTMU	3" x 6"	3" - 8 NPT	3.5	6
PFXDNGTPU	4" x 6"	4" - 8 NPT	4.5	6

## Warranty and Codes

These PROFLO products carry a 1-year limited warranty.

