




PFXDNT Series **PFXDNG Series** **PFXDNGT Series** **Low Lead Dielectric Nipple**

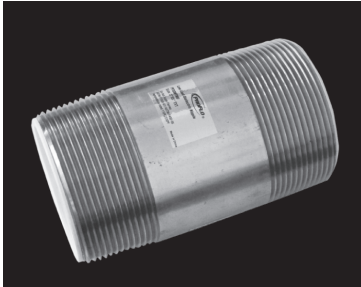

Thread x Thread

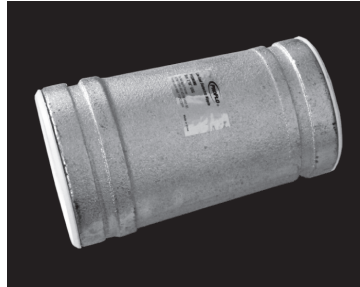

Groove x Groove

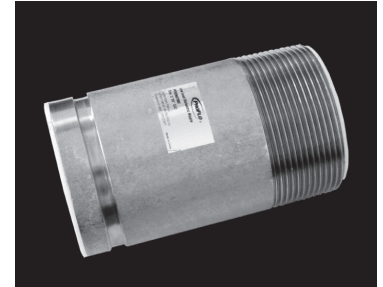


Groove x Thread

Product Features

- Zinc Plated
 - Polypropylene Plastic Liner
 - Metal to Metal design
 - Pressure up to 300 PSI/ Temperature up to 230° F (110°C)
- Materials meet the requirements of ASTM F1545-15


- Certifications: NSF/ANSI 61, NSF/ANSI 372, IAPMO/UPC listed
- TxT / GxT: Steel pipe conforming to ASTM A53 Grade B
NPT thread meets ANSI/ASME B1.20.1
- GxG: Ductile Iron ASTM A536, Grade 65-45-12 compliant

Thread x Thread

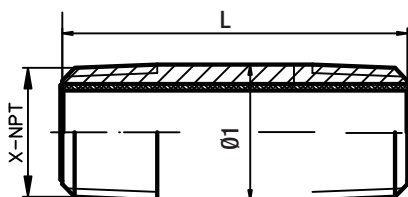


Model Number	Size	X-NPT	Ø1(in)	L(in)
PFXDNTDM	1/2" x 3"	1/2"-14NPT	0.84	3
PFXDNTFM	3/4" x 3"	3/4"-14NPT	1.05	3
PFXDNTGP	1" x 4"	1"-11.5NPT	1.315	4
PFXDNTHP	1-1/4" x 4"	1-1/4"-11.5NPT	1.66	4
PFXDNTJP	1-1/2" x 4"	1-1/2"-11.5NPT	1.9	4
PFXDNTKP	2" x 4"	2"-11.5NPT	2.375	4
PFXDNTLU	2-1/2" x 6"	2-1/2"-8NPT	2.875	6
PFXDNTMU	3" x 6"	3"-8NPT	3.5	6
PFXDNTPU	4" x 6"	4"-8NPT	4.5	6

Groove x Groove



Model Number	Size	Ø1(in)	Ø2(in)	L(in)
PFXDNGKP	2" x 4"	2.375	2.125	4.17
PFXDNGLU	2-1/2" x 6"	2.875	2.625	6.18
PFXDNGMU	3" x 6"	3.5	3.125	6.18
PFXDNGPU	4" x 6"	4.5	4.125	6.18
PFXDNGUU	6" x 6"	6.625	6.125	6.18

Groove x Thread

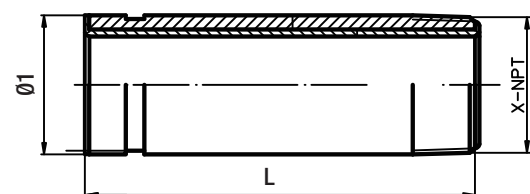

Model Number	Size	X-NPT	Ø1(in)	L(in)
PFXDNGTGP	1" x 4"	1"-11.5NPT	1.315	4
PFXDNGTHP	1-1/4" x 4"	1-1/4"-11.5NPT	1.66	4
PFXDNGTJP	1-1/2" x 4"	1-1/2"-11.5NPT	1.9	4
PFXDNGTKP	2" x 4"	2"-11.5NPT	2.375	4
PFXDNGTLU	2-1/2" x 6"	2-1/2"-8NPT	2.875	6
PFXDNGTMU	3" x 6"	3"-8NPT	3.5	6
PFXDNGTPU	4" x 6"	4"-8NPT	4.5	6

Warranty and Codes

This PROFLO product carries a 1-year limited warranty