


AUTOMATIC  
THERMAL  
PROTECTOR

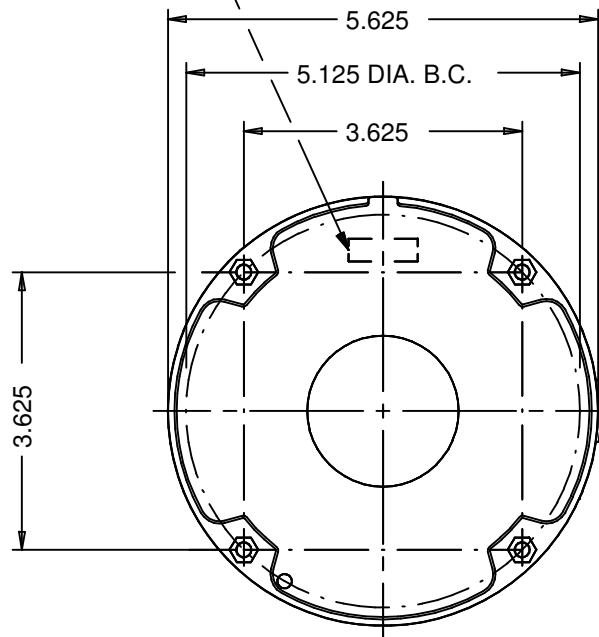

BLACK  
DRAIN  
PLUG


8-32 UNC  
THREAD

DRAIN PLUG  
INSTRUCTION  
LABEL

NAMEPLATE


(3) .250 STRAIGHT TYPE  
Q.C. TERMS. WITH INSUL.  
GRIP

3 LEADS, #18, .062 THICK INSUL.  
TO EXTEND BEYOND MOTOR  
YELLOW=45.000 +2-1, BROWN=45.000 +2-1,  
BLACK=45.000 +2-1.

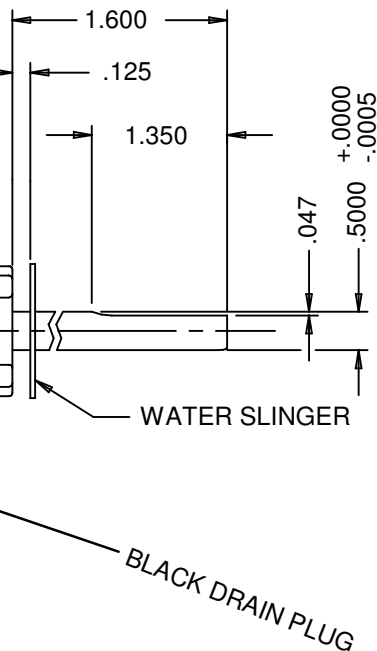

WATER SLINGER

BLACK DRAIN PLUG

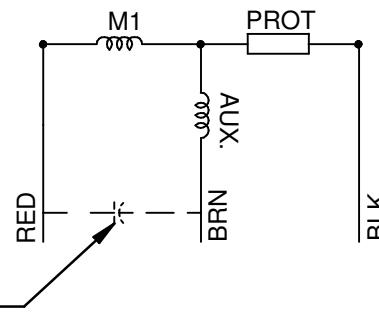

NIDEC MOTOR CORPORATION 15-Oct-12

MODEL		REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN	
K55HXS WF-7924			WHOLESALE-HAC	1/12	208-230	.67	60	1100	CW. LEAD END		
SHEET NUMBER	REV	REVISION RECORD FOR: C6404-00			INFORMATION DISCLOSED ON THIS DOCUMENT IS CONSIDERED PROPRIETARY AND SHALL NOT BE REPRODUCED OR DISCLOSED WITHOUT WRITTEN CONSENT OF NIDEC MOTOR CORPORATION				NIDEC MOTOR CORPORATION		
1 OF 1	C	UPDATED ENGINEER APPROVED TO B. GAITAN									
REVISION DATE											
15-OCT-12											
ISSUED BY		REVIEWED BY		ENGINEER APPROVED	TITLE				CODE	ITEM NO.	SIZE
R. MORALES		M. LARGENT		B. GAITAN	ASSEMBLED VIEW				V01	333434	A