


ROTATION IS C.CW VIEWING LEAD END WITH
ORG. TO ORG. & YEL. TO YEL. TO REVERSE
ROTATION INTERCHANGE ORG. & YEL. LEADS

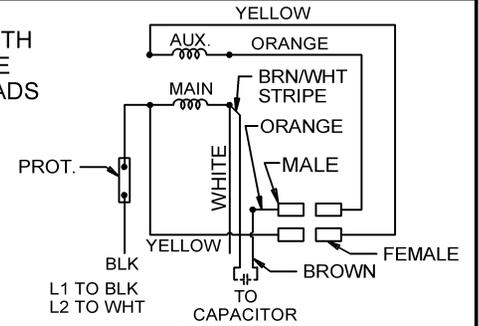



(2) .250 FLAG TYPE Q.C. TERMS.
WITH INSUL.GRIP ON BROWN
LEADS

#16 GREEN GROUND LEAD
TO BE 12.00 BETWEEN
CENTERS OF TERMS.
TERM. TO FIT #10 SCREW

LEADS SKINNED .75

8-32 UNC
THREAD

4 LEADS TO EXTEND
30" BEYOND MOTOR

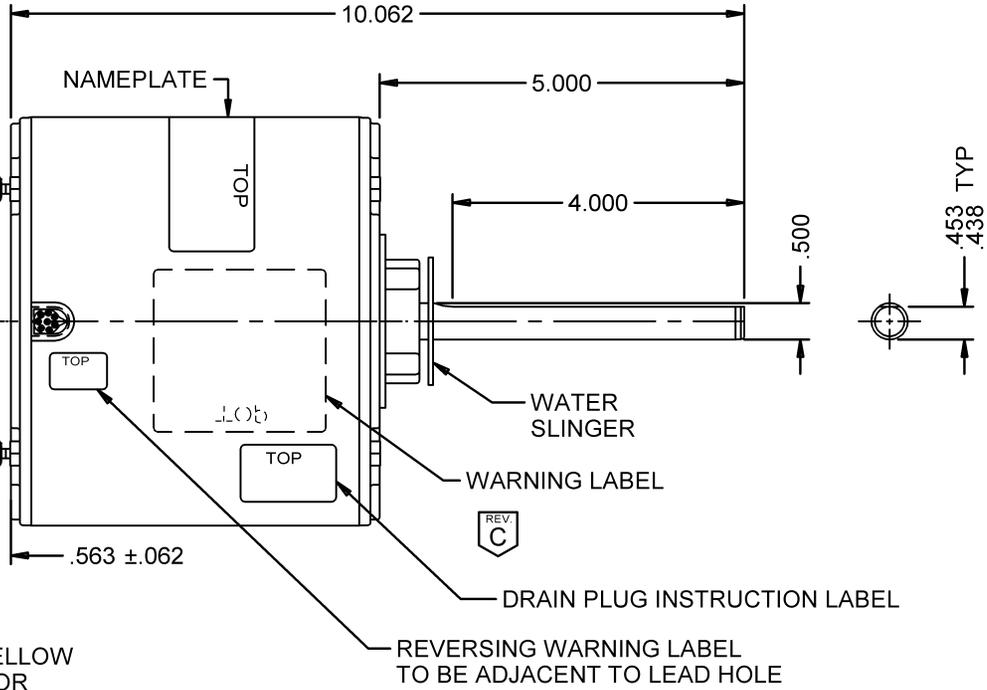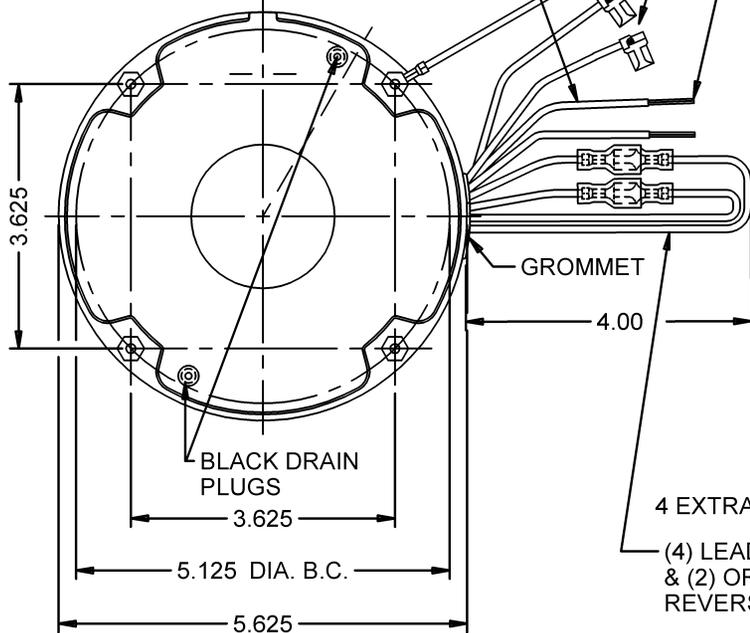

(4) LEADS, (2) YELLOW
& (2) ORANGE FOR
REVERSING ROTATION.

USE WITH 7.5 MFD
370-VAC CAPACITOR TOTALLY ENCLOSED

NIDEC MOTOR CORPORATION 21-Jun-13

MODEL	REF	CUSTOMER	HP	VOLTS	AMPS	HZ	RPM	ROTATION	CUSTOMER PN
K55HXMAE-0216	A29826	WHOLESALE - HAC	1/3	208-230	2.0	60	1075	CCW LEAD END REV	1877

SHEET NUMBER	REV	REVISION RECORD FOR: C7803-20
1 OF 1	C	DELETED NOTE.
REVISION DATE		
21-JUN-13		

INFORMATION DISCLOSED ON THIS DOCUMENT
IS CONSIDERED PROPRIETARY AND SHALL NOT BE
REPRODUCED OR DISCLOSED WITHOUT WRITTEN
CONSENT OF NIDEC MOTOR CORPORATION

**NIDEC MOTOR
CORPORATION**

ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE IS GIVEN

ISSUED BY	REVIEWED BY	ENGINEER APPROVED
R. MORALES	N. CALVIN	B. GAITAN

TITLE
ASSEMBLED VIEW

CODE	ITEM NO.	SIZE
V01	782937	A