KOHLER_®

Gradient® Frameless Sliding Shower Door K-709064-D3

Features

- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Reversible top track offers a choice of curved or flat profile.

Technology

- Frameless 1/4" (13 mm) frosted tempered glass.
- Improved bypassing mechanism for smoother feel.
- Solid-metal contemporary towel bar design.

Installation

- Out-of-plumb adjustability simplifies installation.
- Sliding shower door.
- Not for use in hospitality.

Included Components

Additional Components: Hardware kit



Codes/Standards CPSC 16CFR 1201

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|------------------------|
| 11 | SHP | Bright Polished Silver |
| 1 | MX | Matte Nickel |
| | ABZ | Anodized Dark Bronze |

Available Glass Options

Code Description


D3 Frosted



Gradient®



Frameless Sliding Shower Door K-709064-D3

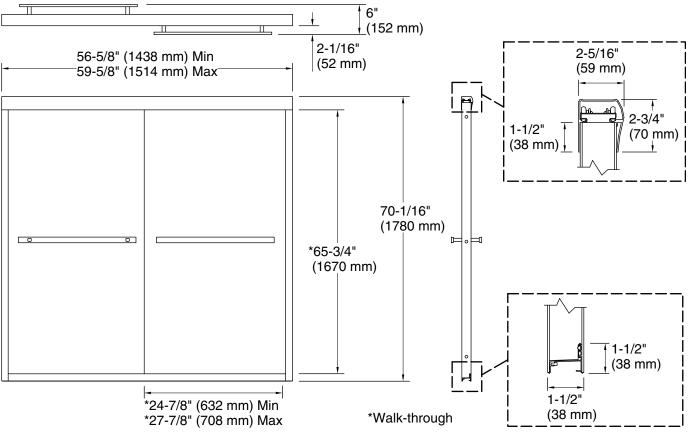

Technical Information

All product dimensions are nominal.

| Installation type: | For shower base installation |
|-------------------------------|------------------------------|
| Opening style: | Sliding/Bypass |
| Opening Width - Min: | 56-5/8" (1438 mm) |
| Opening Width - Max: | 59-5/8" (1514 mm) |
| Walk-through - Min: | 24-7/8" (632 mm) |
| Walk-through - Max: | 27-7/8" (708 mm) |
| Base-To-Wall Radius – Max: | 5/8" (16 mm) |
| Glass thickness: | 1/4" (6 mm) |
| Glass coating: | CleanCoat® |

Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 71-13/16" (1824 mm) to allow for installation clearance.