

Location:

# SYMMONS® Safetymix®

## Hand Shower System 1-25-FSB

### Specification Submittal



#### Feature Highlights

- Symmons Safetymix 3-port pressure balancing mixing valve with lever handle and adjustable stop screw to limit handle turn.
- Open Flow FS hand shower with 5 foot flexible metal hose, inline vacuum breaker, wall connection and flange
- 30 inch adjustable slide bar for mounting hand shower
- Standard flow rate 2.5 gpm (9.5 L/min)  
*Optional lower flow rate restrictor available*
- Polished chrome finish

#### Model Numbers

- 1-25-FSB  
Hand Shower System with 30 inch adjustable slide bar, Safetymix 3-port pressure balancing mixing valve #4-500

#### Finish Options

*Append appropriate -suffix to model number.*

- Polished chrome finish (standard)

#### Standards / Certifications

ASME A112.18.1/CSA B125.1



#### Warranty

- Limited Lifetime - to the original end purchaser in residential/consumer installations.
- 5 years - for commercial installations

#### Options / Modifications


*Append appropriate -suffix to model number.*

- CG** -1.5 1.5 gpm (5.7 L/min) flow restrictor
- 2.0 2.0 gpm (7.6 L/min) flow restrictor
- 72 72" hose in place of 60" hose
- ADAHS 1 mode white hand shower unit with non-positive shut-off button in place of standard hand shower unit
- B48 48" adjusting bar in place of standard 30" bar
- BX Back connection with integral stops
- G Dial thermometer
- QD Quick disconnect
- R White vinyl hose in place of metal hose
- T724 24" slide bar/grab bar with ADA hand shower
- T736 36" slide bar/grab bar with ADA hand shower
- T748 48" slide bar/grab bar with ADA hand shower
- VB Elevated vacuum breaker with wall flanges in place of in-line vacuum breaker
- VP Vandal resistant escutcheon screws in place of standard screws
- X Integral stops - allows water shut off at valve for service. Recommended for use on all multiple commercial installations
- X-3/4" 3/4" valve to increase flow approximately 20%
- X-CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve

# Dimensions *Safetymix Hand Shower System, 1-25-FSB*

Male 1/2" I.P.S. thread must protrude 3/8" (10mm) from finished wall for proper installation of street ell and flange.

**IMPORTANT:** To maintain ADA compliance, slide bar must be mounted no higher than 48" above shower floor.

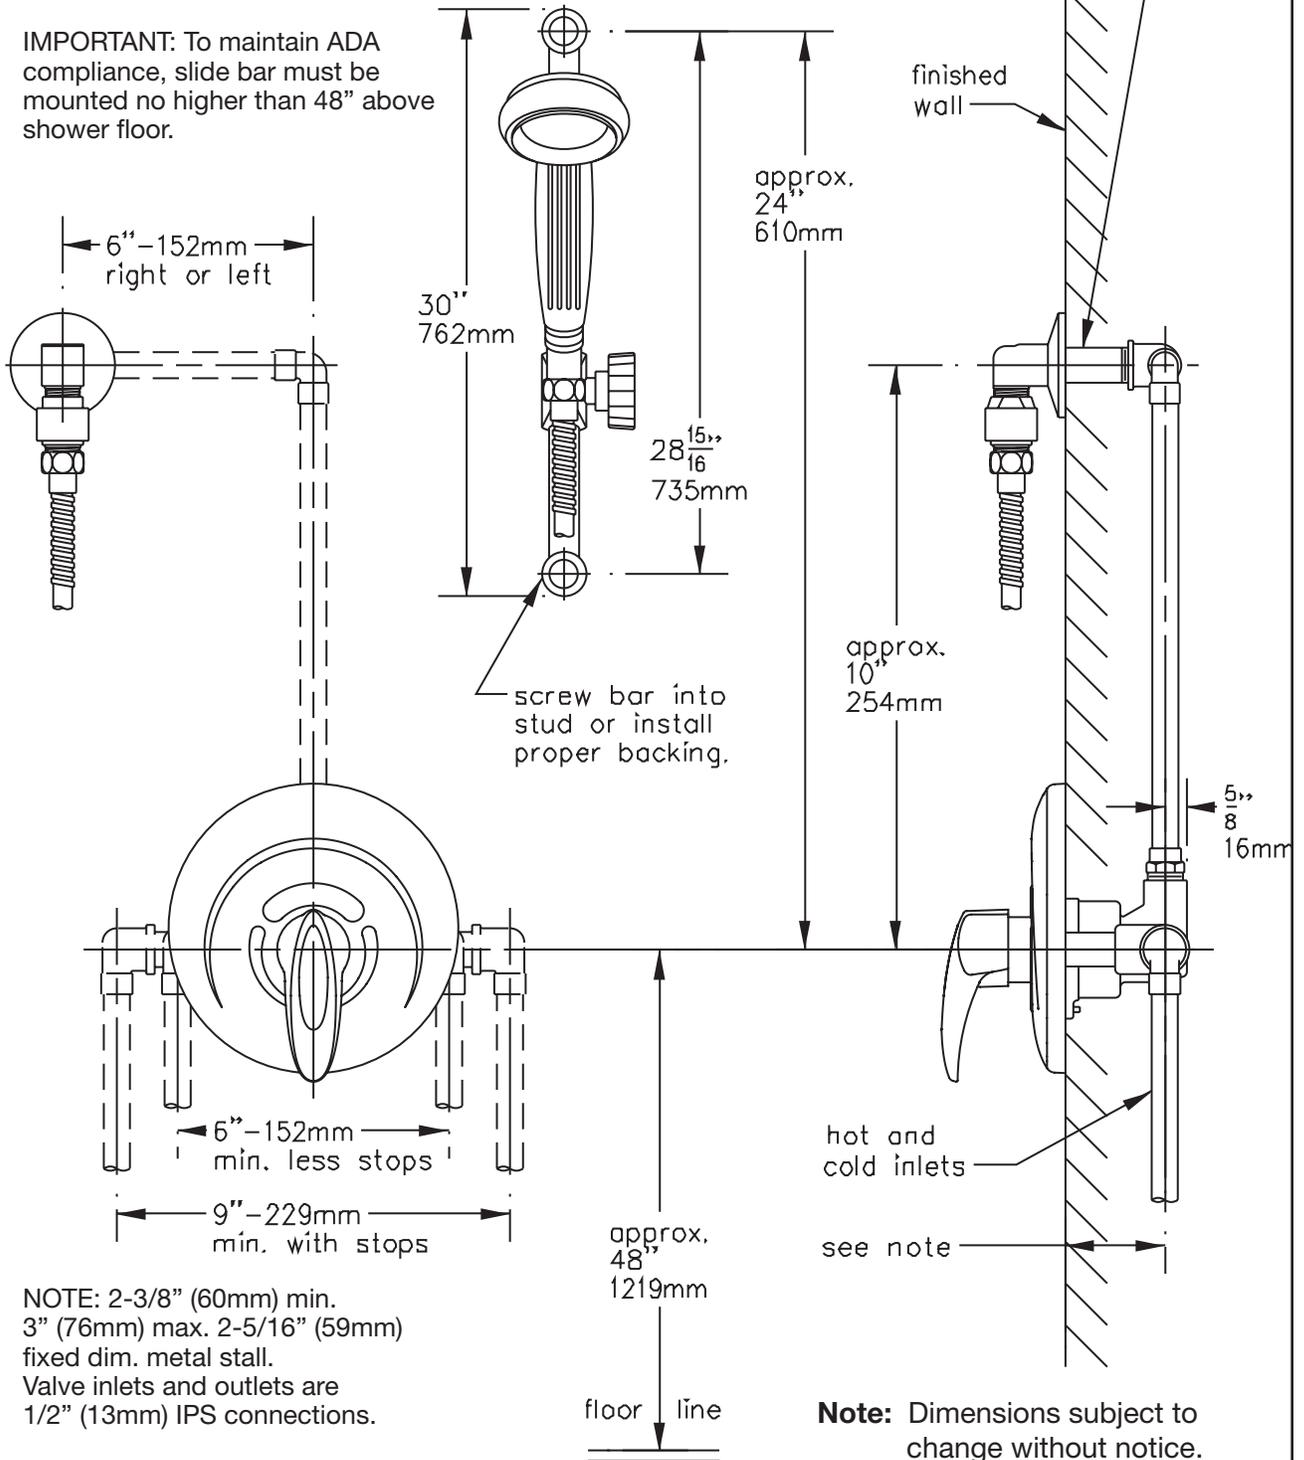

NOTE: 2-3/8" (60mm) min.  
3" (76mm) max. 2-5/16" (59mm)  
fixed dim. metal stall.  
Valve inlets and outlets are  
1/2" (13mm) IPS connections.