

ASSEMBLY INSTRUCTIONS

Fresno Framed Medium Sconce

Item # CHD 2933


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver

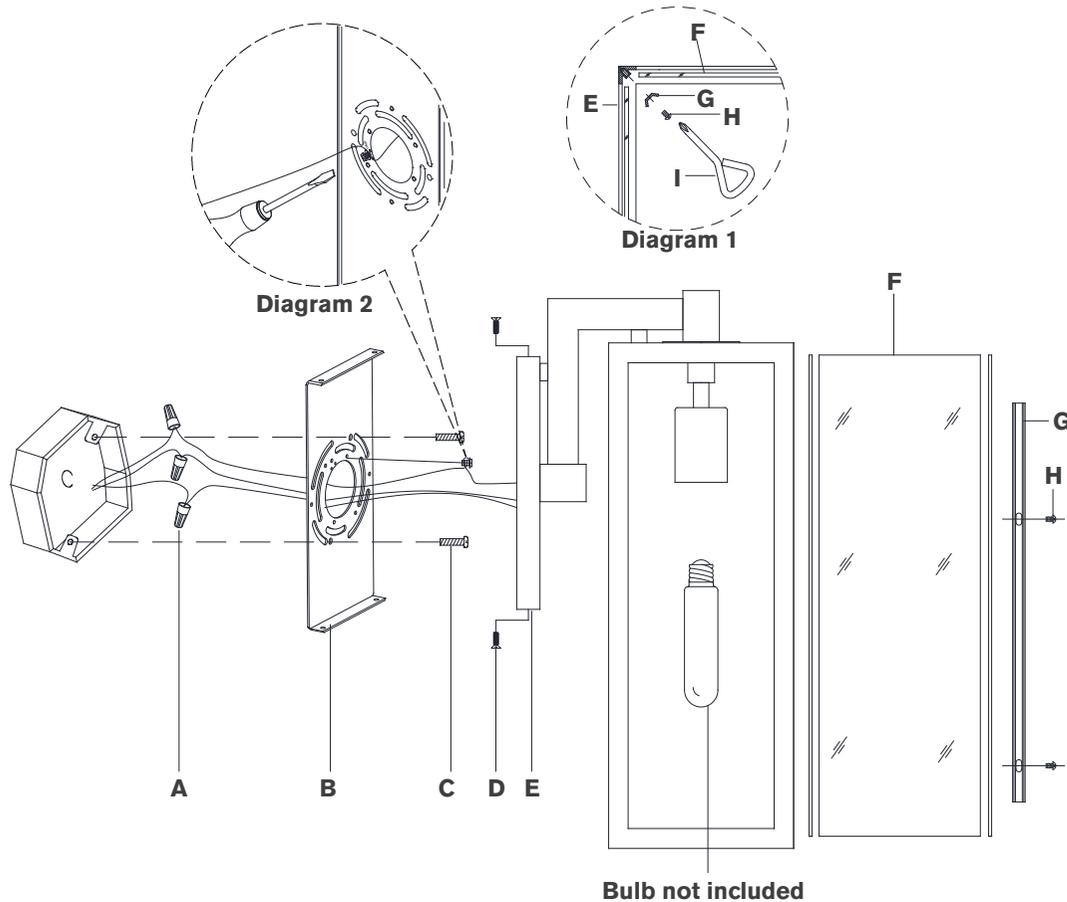

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove metal bars (**G**) from fixture body (**E**) by removing screws (**H**) using provided screwdriver (**I**).
3. Attach glass panels (**F**) to fixture body (**E**) and secure with metal bars (**G**) and screws (**H**) with provided screwdriver (**I**). See diagram 1.
NOTE: Do not over-tighten otherwise glass panels could be damaged.
4. Remove mounting plate (**B**) from fixture by removing screws (**D**).
5. Install mounting plate (**B**) to junction box and secure with mounting screws (**C**).
6. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 2.). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (**A**).
7. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut (**A**).
8. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut (**A**).

CAUTION: Do not reverse the hot and neutral connections.

