

Turbo air
AIR CONDITIONER MANUFACTURER

4184 E. Conant St.
Long Beach, CA 90808
Tel. 888-900-1002
Fax. 310-900-1088
www.turboairinc.net

Project :

Model # :


Item # :

Qty :

Approval :

Regular Wall Mount Unit

Model : TAS-18N & TAS-18N/O

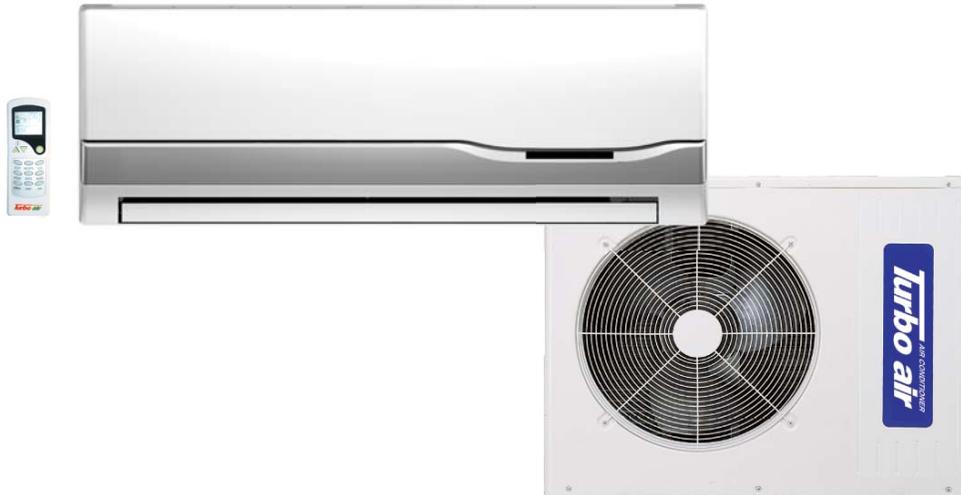

208~230V / 60HZ (Evaporator Unit & Condensing Unit) **COOLING ONLY**

≡ FEATURES / BENEFITS ≡

- *Natural Wind By AI Theory*
- *Auto Operation*
- *Super Power & Mild Operation*
- *Quiet Operation*
- *Soft Dry Operation Mode*
- *Sleep Mode Auto Control*
- *Wireless Remote Controller*
- *Circulation Operation Mode*
- *Self-Diagnosis Function*
- *24-Hour On/Off Timer*
- *Anti-Bacteria Filter*
- *2 Way Auto Swing*
- *Deodorizing Filter*
- *Washable Grille*
- *Convenient Display*

Regular Wall Mount Unit

JOB NAME:	LOCATION:
PURCHASER:	
ENGINEER:	
SUBMITTED TO:	FOR: REFERENCE APPROVAL CONSTRUCTION

SPECIFICATIONS	TAS-18N & TAS-18N/O
SEER	13
EER	11.4
HSPF	n/a
Voltage	208-230V/60HZ/1PHASE
Breaker Size (A)	20
RLA Cool/Heat (A)	5.3/N/A
Operating Ambient Temperature Range for Cooling	20°F - 109°F
Indoor Unit	
Airflow Hi/Medium/Low Speed (CFM)	624
Noise Level Hi Speed (Db)	50
Width (Inches)	42.5
Depth (Inches)	9.6
Height (Inches)	13.2
Unit Weight (lbs)	40
Outdoor Unit	
Noise Level (dB)	55
Width (Inches)	35.4
Depth (Inches)	13
Height (Inches)	32.9
Unit Weight (lbs)	143

Line Sets	
Refrigerant	R410A
Pipe Size	3/8", 5/8"
Maximum Length	49
Maximum Vertical	16
Factory Charge for (Ft)	25
Additional Charge (Oz/Ft)	0.3

Controls	
Control Method	Wireless Remote Control
Communication Control Voltage	208-230V

Certification	
Safety	UL
Performance	

*All specification subject to change without notice.

   	<p>▪ Toll Free : 888-900-1002</p>
---	-----------------------------------

