

TRENCH TOUGH PLUS™

MOLDED PVC FITTINGS

TRENCH TOUGH PLUS™

SDR35 GASKETED SEWER FITTINGS

- Ideal for use in wastewater, stormwater and industrial waste applications.
- Reinforced to SDR26 thickness at key locations such as the branches of tees and wyes for optimal long-term performance.
- Joint withstands 15 psi hydrostatic pressure and a -10.8 psi vacuum pressure.
- Leak-proof at 5° joint deflection and 5% ring deflection.

Injection
Molded
4" – 18"

Fabricated
18" – 42"



NEW MOLDED GASKETED SDR35 SEWER FITTINGS

Product	Size (inches)	Size (mm)	Old Part #	NEW Part #
45° WYE (GxGxG)	15 x 10	375 x 250	043317	143317
	15 x 12	375 x 300	043318	143318
	15	375	043310	143310
	18 x 4	450 x 100	043904	143904
	18 x 6	450 x 150	043903	143903
45° ELBOW (GxG)	15	375	043515	143515
45° ELBOW (SxG)	15	375	043951	143951
REPAIR COUPLING WITHOUT PIPE STOP (GxG)	12	300	043631	143631
EXTENDED BUSHING (SxG) - Concentric	12 x 4	300 x 100	043697	143697
	12 x 6	300 x 150	043617	143617
	12 x 8	300 x 200	043616	143616
	12 x 10	300 x 250	043623	143623
INCREASER COUPLING (GxG)	12 x 4	300 x 100	043798	143798
	12 x 6	300 x 150	043530	143530
	12 x 8	300 x 200	043532	143532
	12 x 10	300 x 250	043520	143520




MULTI FITTINGS


LAYING LENGTH

ISSUE DATE: OCT 30/17
SUPERCEDES: MAR 11/05

GASKET CAP

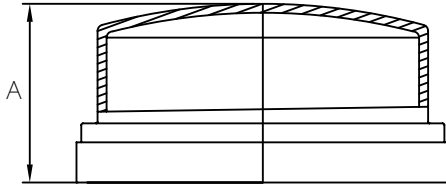

INJECTION MOLDED FITTING (M)

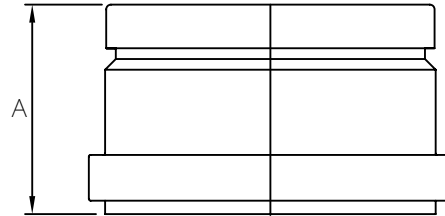

FABRICATED FITTING (F)

	SIZE	PART NUMBER	A REF
M =	4	063959	2.375
M =	6	043988	3.625
M =	8	063961	6.250
M =	10	063886	5.250
M =	12	043987	5.750
F @	15	043962	13.000
F @	18	043746	17.500
F @	21	043747	19.500
F @	24	043168	20.500
++F @	27	043749	22.000

Note: = Refer to Page G4 for Hub Detail, Type A
@ Refer to Page G5 for Hub Detail, Fabricated
++ FRP Reinforced