

ZONECONE

Black Base Cone

Introducing our new technologically advanced, superior Black Base Cone! Our Black Base Cone features new grip technology for reduced slippage while handling and interior bands for quick release stacking. This fade resistant cone out performs others with its Cold and Hot Temperature Formulation, making it the best fit for any climate. The Black Base Cone features a 16-lug base for additional support and reduced base cracking during runover incidents. This unique base improves surface friction to prevent skidding during placement.

The Black Base Cone creates a new class of traffic cones, designed for durability and made crash proof. Your safety demands it and Work Area Protection delivers it with high-visibility, durable, high-quality traffic cones.

Features

- Injection-molded for supreme durability
- New grip technology for easier handling
- Interior bands and wide base design reduce stacking issues
- Cold and Hot Temperature Formulation provides superior winter and summer performance
- Superior Fluorescent Pigment gives unmatched fade resistance
- Base and conical sections interlocked and fused to provide integral design
- 16 lug base provides additional support and reduced cracking during runovers
- New base design increases friction to prevent skidding
- NCHRP 350/MASH certified
- Meets MUTCD standards



Standard 28" Cone with 6" & 4" Reflective Collars


Available plain or with reflective collars attached






STANDARD BLACK BASE CONES

| Product No. Weight | Description | Model No. | Top Thickness | Bottom Thickness | A | B | C | D | Cone Height | |
|-----------------------|-----------------|-------------------|---------------|------------------|--------|-------|-------|--------|-------------|-------|
| 412337 | Standard | 18PVCS-BB | 0.09" | 0.09" | 10.5" | 1.57" | 1.93" | 8.10" | 18" | 3 LB |
| 412422 | Standard | 18PVCS6CC-BB | 0.09" | 0.09" | 10.5" | 1.57" | 1.93" | 8.10" | 18" | 3 LB |
| 412424 | Standard | 28PVCS6CC4CC-BB | 0.12" | 0.12" | 14.51" | 1.57" | 1.89" | 11.38" | 28" | 7 LB |
| 412425 | Heavy | 28PVCH6CC4CC-BB | 0.12" | 0.12" | 14.51" | 1.57" | 1.89" | 11.38" | 28" | 10 LB |
| 412423 | Trim-Line Heavy | 28PVCTLH6CC4CC-BB | 0.12" | 0.12" | 14.5" | 1.57" | 1.89" | 8.83" | 28" | 10 LB |
| 412426 | Standard | 36PVCS6CC4CC-BB | 0.13" | 0.13" | 14.75" | 1.58" | 1.99" | 11.69" | 36" | 10 LB |
| 412427 | Heavy | 36PVCH6CC4CC-BB | 0.13" | 0.13" | 14.75" | 1.58" | 1.99" | 11.69" | 36" | 12 LB |

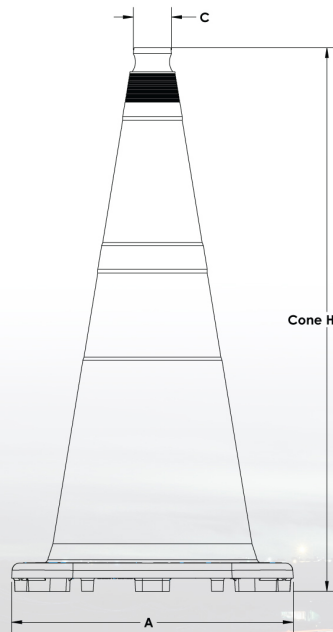

A = Base size (square)
B = Hole diameter at top
C = Cone diameter at top
D = Cone diameter at base

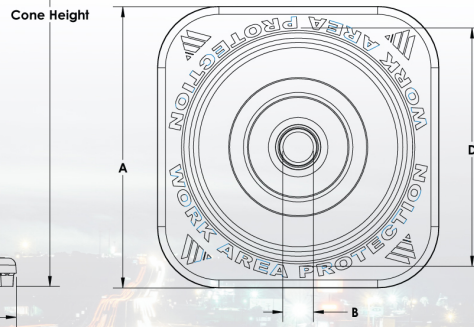

HILL & SMITH INC.

987 Buckeye Park Road | Columbus OH 43207

(614) 340-6294 | info@hillandsmith.com

www.hillandsmith.com | www.workareaprotection.com