


SYNTHETIC WEB BRIDLE SLINGS

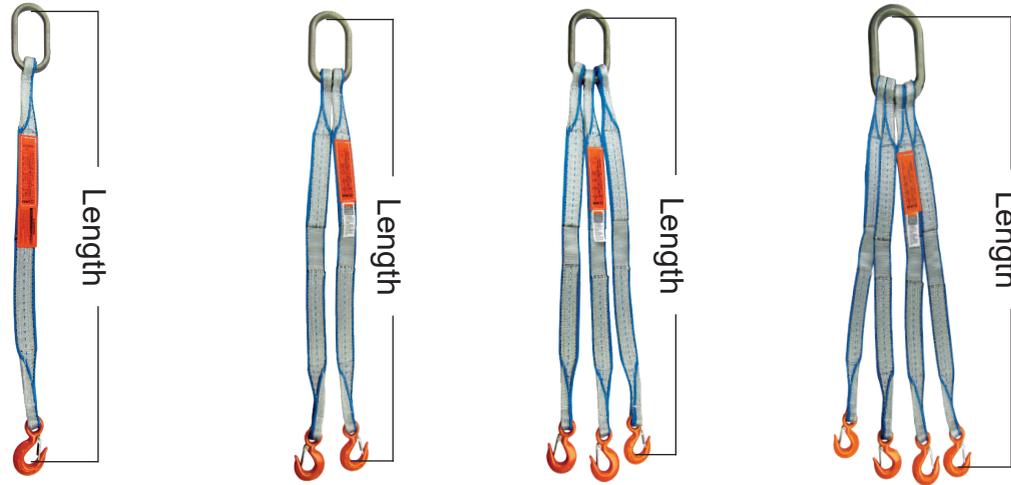

Web Slings

Web Bridle Slings											
Part No. For Web Sling Legs	Web Width (in.)	Web Plies	Number of Legs	Rated Capacity* (lbs.)						Alloy Sling Hook Size (Ton)	Oblong Link Dia. (in.)
				Vertical	Choker	Basket	60°	45°	30°		
EE1801	1	1	Single	1,600	1,280	3,200	–	–	–	1	1/2
	1	1	Double	–	–	–	2,700	2,200	1,600	1	1/2
	1	1	Triple	–	–	–	4,100	3,300	2,400	1	3/4
	1	1	Quad	–	–	–	5,500	4,500	3,200	1	1
EE2801	1	2	Single	3,000	2,400	6,000	–	–	–	1-1/2	1/2
	1	2	Double	–	–	–	5,100	4,200	3,000	1-1/2	1/2
	1	2	Triple	–	–	–	7,700	6,300	4,500	1-1/2	3/4
	1	2	Quad	–	–	–	10,300	8,400	6,000	1-1/2	1
EE1802	2	1	Single	3,000	2,400	6,000	–	–	–	1-1/2	1/2
	2	1	Double	–	–	–	5,100	4,200	3,000	1-1/2	1/2
	2	1	Triple	–	–	–	7,700	6,300	4,500	1-1/2	3/4
	2	1	Quad	–	–	–	10,300	8,400	6,000	1-1/2	1
EE2802	2	2	Single	6,000	4,800	12,000	–	–	–	3	3/4
	2	2	Double	–	–	–	10,300	8,400	6,000	3	1
	2	2	Triple	–	–	–	15,500	12,700	9,000	3	1
	2	2	Quad	–	–	–	20,700	16,900	12,000	3	1-1/4

Note: Hardware capacities correspond to the appropriate sling capacities. See hardware dimensions in Rigging Hardware section in this catalog. Import hooks with latches are standard. Contact *Lift-All* for domestic hook and latch options.

* **⚠ WARNING** Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog. **Always protect synthetic slings from being cut by corners and edges. See the Sling Protection section in this catalog.**