



JAY R. SMITH MFG. CO.®
DIVISION OF SMITH INDUSTRIES, INC.
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:



LOCATION


FLOOR DRAINS

WITH 8 1/2" (215) ROUND TOPS

HEAVY DUTY DRAINS WITH TRACTOR GRATE

FUNCTION: Used in heavy traffic areas where waste water contains no sediment or debris and floor construction requires shallow drain body. Body flange and flashing collar serve as anchor in on grade locations and as flashing clamp when installed in waterproof floors.

Free Area
13 SQ IN
(84) SQ CM

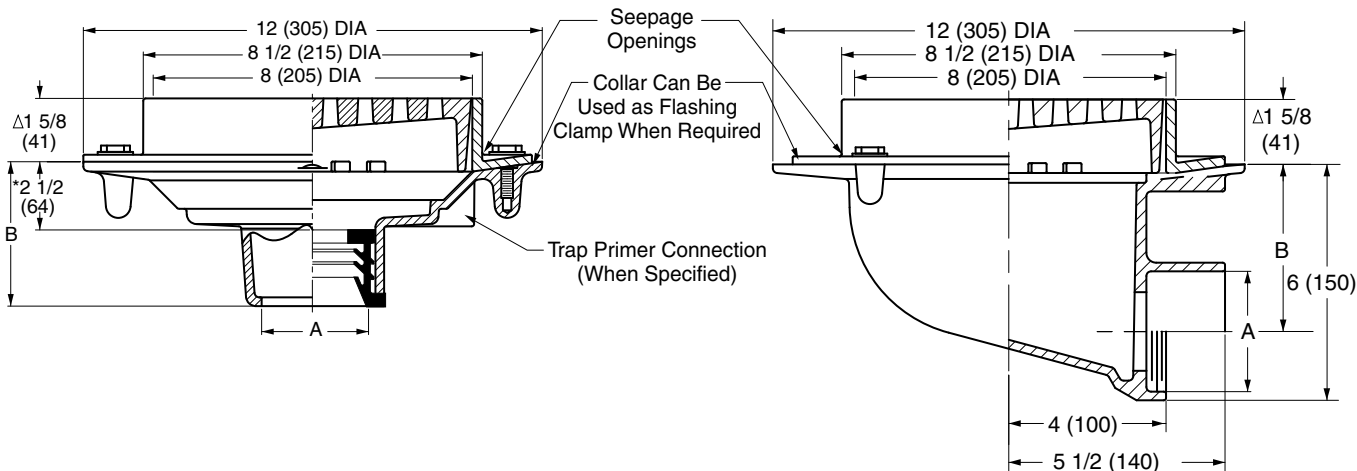

☐ Fig. 2120C.....CAULK OUTLET
☐ Fig. 2120Y.....NO-HUB OUTLET

☐ Fig. 2125T.....CAULK OUTLET
☐ Fig. 2125T.....THREADED OUTLET

A SIZE	02 (50)	03 (80)	04 (100)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded			3 3/4 (95) NO-HUB Only

A SIZE	02(50)	03(75)	04(100)
B	4 1/4(110)	3 3/4(95)	3

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Collar with Cast Iron Tractor Grate.

VARIATIONS:

- ☐ Closure Plug -XP (Fig. 2110 only)
- ☐ Dome Grate -D
- ☐ Flat Bottom Strainer -FBS (Fig. 2120 only)
- ☐ L Speedi-Set Service Weight (Fig. 2120 only)
- ☐ LXH Speedi-Set Extra Heavy (Fig. 2120 only)
- ☐ NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2120 only)
- ☐ Sediment Bucket -B
- ☐ Square Top -S
- ☐ * Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- ☐ Vandal Proof Grate -U
- ☐ T Threaded Outlet

OPTIONAL MATERIALS:

- ☐ Ductile Iron Grate -M
- ☐ Galvanized Cast Iron -G
- ☐ Nickel Bronze Top -NB
- ☐ Polished Bronze Top -PB

ΔAdd 3/16" (5) when bronze top is specified.
*This dimension to internal stop of Speedi-Set gasket.

NOTE: Dimensions shown in parentheses are in millimeters.
*Not available on Fig. 2120T threaded outlet drain.

FIGURE NUMBER	REV.	DATE	DESCRIPTION	BY	CHKD.
2120, 2125	G F	11/17/05 1-15-99	Revised 2120 A-Size Table Submittal redraw Illustrator	JJ CMD	CL CL

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		2120, 2125