

BISMAT® Flash Clamp





Product Specifications:

- For use with all metal pipes
- Easier, faster, safer - installs with one hand
- Noise reducing - tested in accordance with ISO 3822-1*
- Features our patented Quick-Locking System
- Due to the locking screw feature, no tools are required for installation!
- Since the locking screw is manually closed, there is minimal rubber compression: this results in better absorption of noise and vibration.
- Age resistant lining
- Materials:
 - Clamp: Steel 1.0242
 - Noise insulation lining: EPDM black rubber
- Noise insulating, according to DIN 4109
- Plenum rated - tested to ASTM E-84
- Tested for fire safety

Item Number	D (mm)	D / CTS (inches)	D / IPS (inches)	B (inches)	H (inches)	h (inches)	Fa,z (lbs)	Items per pkg.
CR3379018	15-18	1/2	3/8	1.9	1.4	0.87	180	50
CR3379023	20-23	3/4	1/2	2.1	1.5	0.91	180	50
CR3379028	25-28	1	3/4	2.3	1.7	1.00	180	50
CR3379035	32-35	1-1/4	1	2.6	2.0	1.20	180	50
CR3379043	40-43	1-1/2	1-1/4	2.9	2.4	1.30	180	50
CR3379051	48-51	-	1-1/2	3.2	2.6	1.50	180	50
CR3379056	53-56	2	-	3.3	3.0	1.60	180	50
CR3379063	57-63	-	2	3.6	3.2	1.80	180	50

The maximum allowed load (Fa,z) is calculated using specific statistical methods related to the breaking load, taking into account a deflection of 0.060" (1.5mm) or 2% of the maximum nominal clamp diameter. The test results are certified and monitored by an independent test institute.

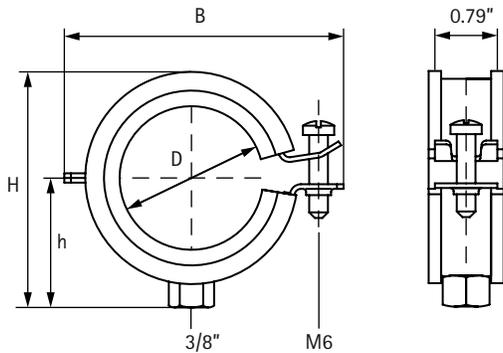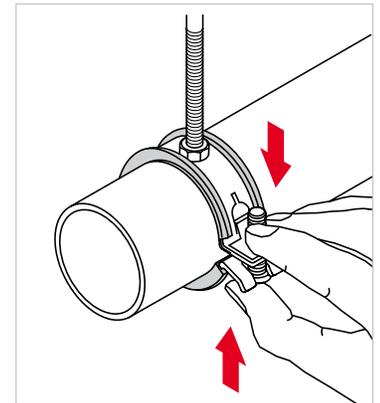

PRODUCT SUBMITTAL Date:	
Job Name:	
Part No.	Qty:
Architect / Owner:	
Contractor:	
Notes:	

* Testing reports available upon request

THE INFORMATION CONTAINED IN THIS SUBMITTAL SHEET IS PROPRIETARY TO WALRAVEN, INC. AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THIS INFORMATION MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION FROM WALRAVEN, INC.

