

## Brass Hose Fittings

**Use:** For use with residential and commercial grade garden hose, all female hose thread connections require a rubber washer inserted prior to installation.


## **Design Features**


- · Compatible with ANSF B1.20.1
- · Low lead compliant

## **Operating Specifications**

**Temperature:** -35° – 100°F at maximum operating pressures **Working Pressure:** 75 PSI maximum, intermittent to 150 PSI

Fitting Material Specifications	
Body	Low Lead Compliant Brass
Hose Washer	Rubber

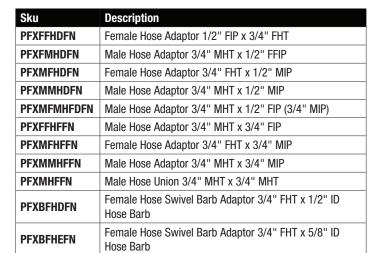



Sku	Description
PFXBFHFFN	Female Hose Swivel Barb Adaptor 3/4" FHT x 3/4" ID Hose Barb
PFXFFHSDFN	Female Swivel Hose Adaptor 3/4" FHT x 1/2" FIP
PFXFHFHSFFN	Female Swivel Hose Union 3/4" FHT x 3/4" FHT
PFXFFHSFFN	Female Swivel Hose Adaptor 3/4" FHT x 3/4" FIP
PFXMHAAN	Male Hose Barb Adaptor 1/8" ID Hose Barb x 1/8" MIP
PFXBMHFFN	Male Hose Barb Adaptor 3/4" MHT x 3/4" 5/8 ID Hose Barb
PFXHWFFN	Y Hose Fitting 3/4" FHT x 3/4" MHT x 3/4" MHT
PFXDEDN	Garden Hose Dishwasher Elbow 3/4" FHT x 1/2" OD Tube
PFXDEN	Garden Hose Dishwasher Elbow 3/4" FHT x 3/8" OD Tube
PFXGHCFN	Garden Hose Cap 3/4" FHT
PFRGHWN	Rubber Garden Hose Washer For 3/4" FHT

## **Listings & Certifications**

Low Lead Compliant ad product CSA certified to NSF/ANSI 372 — Drinking water system components — Lead Content, and conforms to the requirements for "lead free" plumbing products as defined by California, Vermont, Maryland, and Louisiana state law and by Section 1417 of the US Safe Drinking Water Act.

