



Brass Hose Fittings


Use: For use with residential and commercial grade garden hose, all female hose thread connections require a rubber washer inserted prior to installation.

Design Features

- Compatible with ANSF B1.20.1
- Low Lead Compliant

Operating Specifications

Temperature: -35° – 100°F at maximum operating pressures
Working Pressure: 75 PSI maximum, intermittent to 150 PSI

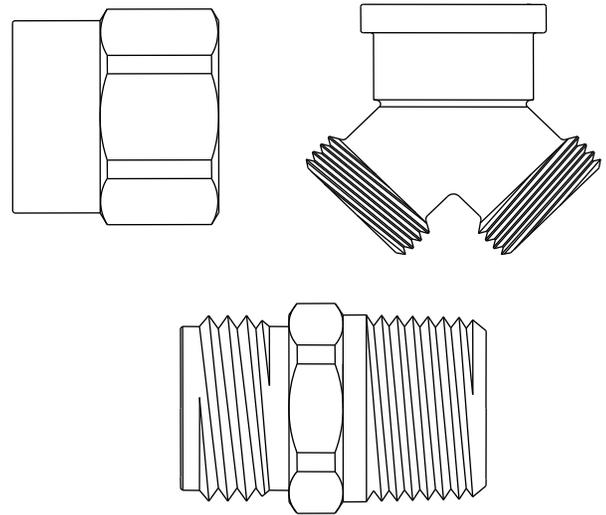

Fitting Material Specifications	
Body	Low Lead Compliant Brass
Hose Washer	Rubber

SKU	Description
PFXFFHDFN	Female Hose Adaptor 1/2" FIP x 3/4" FHT
PFXFMHDFN	Male Hose Adaptor 3/4" MHT x 1/2" FIP
PFXMFHDFN	Female Hose Adaptor 3/4" FHT x 1/2" MIP
PFXMMHDFN	Male Hose Adaptor 3/4" MHT x 1/2" MIP
PFXMFMHDFN	Male Hose Adaptor 3/4" MHT x 1/2" FIP (3/4" MIP)
PFXFMHFFN	Male Hose Adaptor 3/4" MHT x 3/4" FIP
PFXFFHFFN	Female Hose Adaptor 3/4" FHT x 3/4" FIP
PFXMFHFFN	Female Hose Adaptor 3/4" FHT x 3/4" MIP
PFXMMHFFN	Male Hose Adaptor 3/4" MHT x 3/4" MIP
PFXMHFFN	Male Hose Union 3/4" MHT x 3/4" MHT

SKU	Description
PFXFFHSDFN	Female Swivel Hose Adaptor 3/4" FHT x 1/2" FIP
PFXFHHSFFN	Female Swivel Hose Union 3/4" FHT x 3/4" FHT
PFXFFHSFFN	Female Swivel Hose Adaptor 3/4" FHT x 3/4" FIP
PFXBMHFFN	Male Hose Barb Adaptor 3/4" MHT x 3/4" 5/8 ID Hose Barb
PFXHWWFN	Y Hose Fitting 3/4" FHT x 3/4" MHT x 3/4" MHT
PFXDEDN	Garden Hose Dishwasher Elbow 3/4" FHT x 1/2" OD Tube
PFXDEN	Garden Hose Dishwasher Elbow 3/4" FHT x 3/8" OD Tube
PFXGHCFN	Garden Hose Cap 3/4" FHT
PFRGHWN	Rubber Garden Hose Washer For 3/4" FHT

Listings & Certifications

- Product is Certified to NSF/ANSI 372 and conforms with lead content requirements for "lead-free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.



Certified to
NSF/ANSI 372