



# PRODUCT SPECIFICATION DRAWING

## TESTRITE® #TRW2 thru #TRW6 (2", 3", 4" & 6")

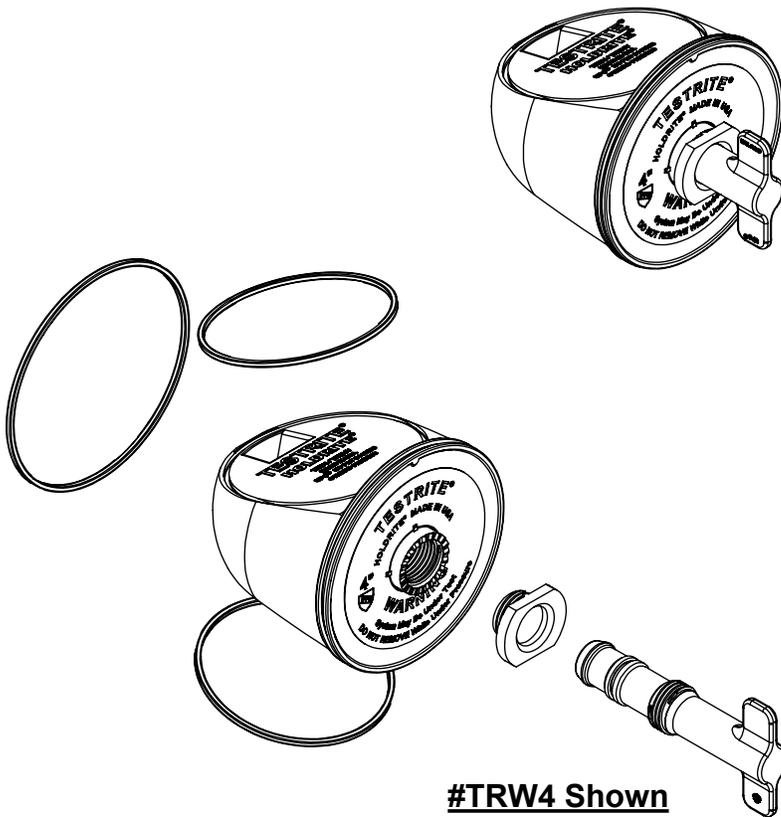

| DIMENSION CHART |                  |
|-----------------|------------------|
| Size            | Dim "A" (closed) |
| 2"              | 2.84" (2-13/16") |
| 3"              | 2.52" (2-1/2")   |
| 4"              | 1.63" (1-5/8")   |
| 6"              | 1.93" (1-15/16") |

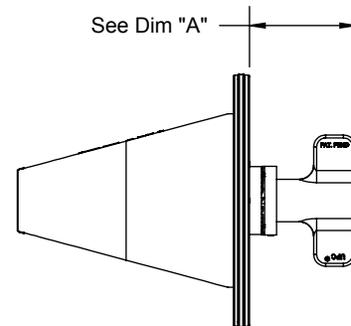

The TESTRITE® TRW2 through TRW6 (TEST WEDGES) are used in conjunction with TESTRITE TEE'S, which allow temporary blocking of the DWV stack for testing. Available in 2", 3", 4" & 6".

### Product Information:

- Material:
  - Wedge: Nylon 6/6
  - Fill Drain Cartridge: NYLON 6/6, Black
  - Lock Nut: Nylon 6/6, Black
- Pressure ratings with TestRite's fittings up to 50' head of water / 5 psi (air):
  - 2" thru 4" up to 50' head, 6" up to 30' head
- For use only with TestRite® fittings
- Patents issued and Patents Pending

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.



| Product Submittal  |      |
|--------------------|------|
| Job Name:          |      |
| Date:              |      |
| Part Number:       | Qty: |
|                    |      |
| Architect / Owner: |      |
|                    |      |
| Contractor:        |      |
|                    |      |
| Notes:             |      |
|                    |      |
|                    |      |