
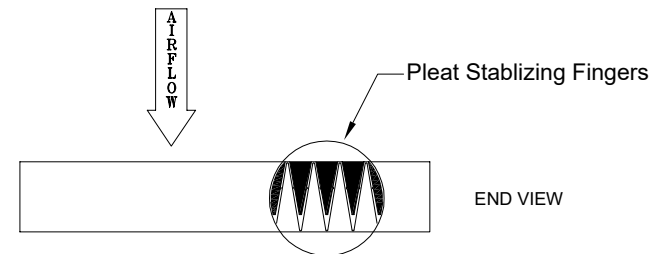


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Initial Resistance	Media Area	MERV
P5-MV8	16x25x5	15- ¹¹ / ₁₆ x 24- ³ / ₁₆ x 4- ¹⁵ / ₁₆	.10	20.0	8
P5-MV8	20x20x5	19- ¹ / ₂ x 20- ⁵ / ₈ x 4- ¹⁵ / ₁₆	.10	20.6	8
P5-MV8	20x25x5	19- ⁵ / ₈ x 24- ¹ / ₄ x 4- ³ / ₄	.10	23.8	8
P5-MV11	16x25x5	15- ¹¹ / ₁₆ x 24- ³ / ₁₆ x 4- ¹⁵ / ₁₆	.15	20.0	11
P5-MV11	20x20x5	19- ¹ / ₂ x 20- ⁵ / ₈ x 4- ¹⁵ / ₁₆	.15	20.6	11
P5-MV11	20x25x5	19- ⁵ / ₈ x 24- ¹ / ₄ x 4- ³ / ₄	.15	23.8	11
P5-MV13	16x25x5	15- ¹¹ / ₁₆ x 24- ³ / ₁₆ x 4- ¹⁵ / ₁₆	.15	20.0	13
P5-MV13	20x20x5	19- ¹ / ₂ x 20- ⁵ / ₈ x 4- ¹⁵ / ₁₆	.15	20.6	13
P5-MV13	20x25x5	19- ⁵ / ₈ x 24- ¹ / ₄ x 4- ³ / ₄	.15	23.8	13

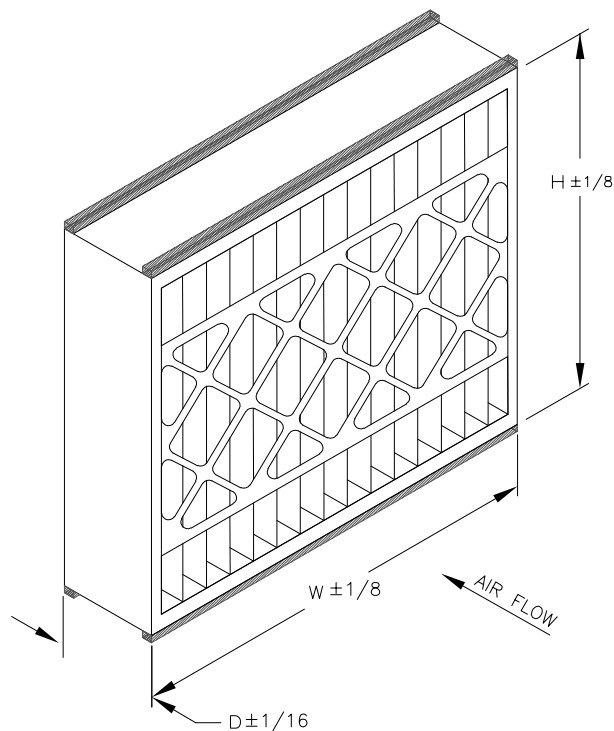

STANDARD CONSTRUCTION

1. White 100% Synthetic Media
2. Expanded Metal Pleat Supports
3. Moisture Resistant Beverage Board Frame
4. Double Wall Frame
5. Pleat Stabilizing Fingers on Air Entering Side
6. (2) Gaskets Top & Bottom

NOTES

1. Model P5 Replacement Filter for Trion Air Bear
2. Tested per ASHRAE 52.2
3. Final Resistance: 1.0" W.G.
4. Rated Velocity: 300 FPM
5. Classified Per UL Standard 900 for Flammability
6. Maximum Operating Temperature: 225 deg. F



HVAC Filtration
Division
parker.com/HVAC

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONAL -
DECIMAL -
ANGLES -

ALL DIMENSIONS IN INCHES

DRAWING NAME

PUROLATOR P5 RESIDENTIAL REPLACEMENT FILTER

APPROVED BY *K. Quinn*

SPECIFICATION NO.
MKT-B-00762

PAGE
1 OF 1

SCALE
NONE

DWG. SIZE
A

REVISION
NEW

REVISION DATE
02-18-2021

THIS MATERIAL IS PROPRIETARY, BEING EXCLUSIVELY OWNED BY PARKER HANNIFIN CORPORATION. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS. ALL RIGHTS RESERVED.