


DEWALT®

ANCHORS & FASTENERS

DUST X+™

ANCHOR INSTALLATION SYSTEM

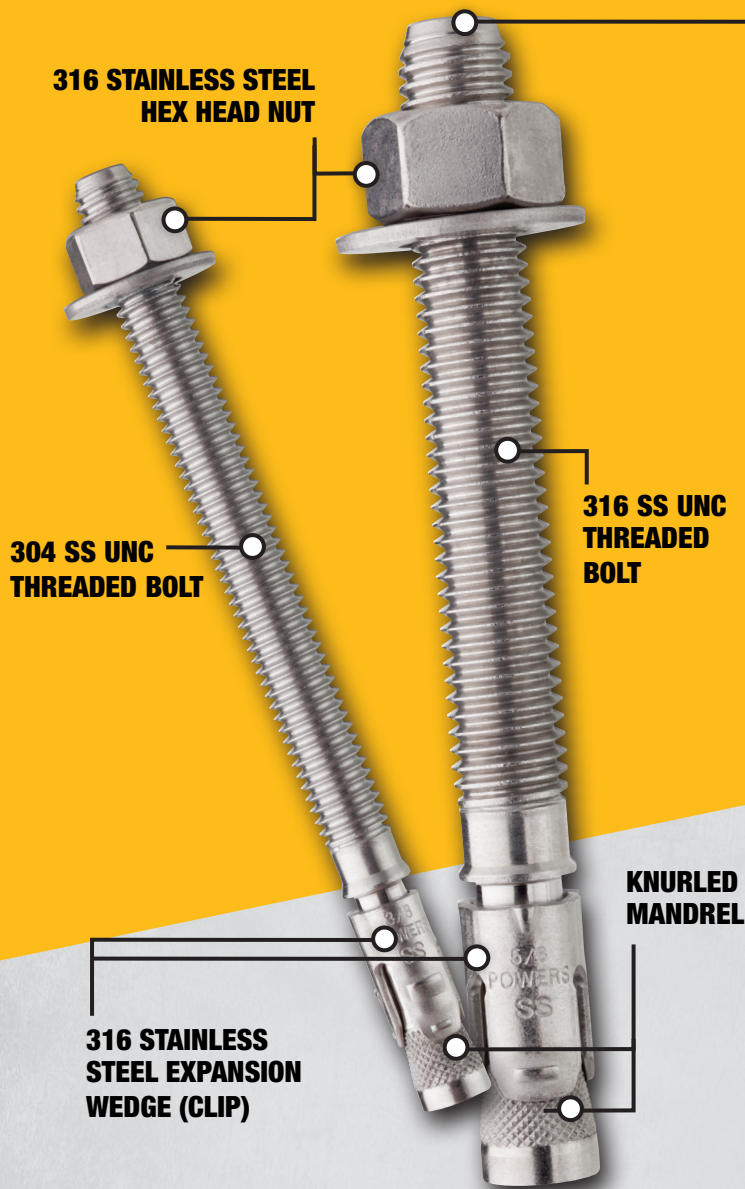

TOP VIEW



LETTER CODE

Length
ID Mark
EX : H = 5";
J = 6"

NUMBER CODE

4 = Type 304 Stainless Steel Body,
316 Stainless Steel Expansion Clip
and Hex Nut
6 = Type 316 Stainless Steel Body,
Expansion Clip and Hex Nut

TYPICAL APPLICATIONS

- Knurled mandrel - consistent performance in cracked concrete
- Interior and exterior applications (SD4)
- Corrosion resistant stainless steel (SD6)
- Tension zone applications

APPROVALS



ESR-2502
Concrete



2015 2012
2009



Recognition in cracked
and uncracked concrete including
seismic and wind loading
(Category 1 Anchors)

BASE MATERIALS



Normal
Weight
Concrete



Lightweight
Concrete



Grouted
Masonry

HIGH PERFORMANCE STAINLESS STEEL WEDGE ANCHORS

Power-Stud®+ SD4/SD6

POWER-STUD®+ SD4

CAT #	ANCHOR SIZE	THREAD LEN	CTN	MSTR
7300SD4*	1/4" x 1-3/4"	3/4"	100	600
7302SD4	1/4" x 2-1/4"	1-1/4"	100	600
7304SD4	1/4" x 3-1/4"	2-1/4"	100	600
7313SD4	3/8" x 3"	1-5/8"	50	300
7315SD4	3/8" x 3-3/4"	2-3/8"	50	300
7316SD4	3/8" x 5"	3-5/8"	50	300
7322SD4	1/2" x 3-3/4"	2"	50	200
7323SD4	1/2" x 4-1/2"	2-3/4"	50	200
7324SD4	1/2" x 5-1/2"	3-3/4"	50	100
7326SD4	1/2" x 7"	5-1/4"	25	100
7333SD4	5/8" x 5"	3"	25	100
7334SD4	5/8" x 6"	4"	25	75
7338SD4	5/8" x 8-1/2"	6-1/2"	25	50
7342SD4	3/4" x 5-1/2"	3-1/8"	20	60
7348SD4	3/4" x 8-1/2"	6-1/8"	10	40

POWER-STUD®+ SD6

CAT #	ANCHOR SIZE	THREAD LEN	CTN	MSTR
7600SD6*	1/4" x 1-3/4"	3/4"	100	600
7602SD6	1/4" x 2-1/4"	1-1/4"	100	600
7604SD6	1/4" x 3-1/4"	2-1/4"	100	600
7610SD6*	3/8" x 2-1/4"	7/8"	50	300
7612SD6	3/8" x 2-3/4"	1-3/8"	50	300
7613SD6	3/8" x 3"	1-5/8"	50	300
7614SD6	3/8" x 3-1/2"	2-1/8"	50	300
7615SD6	3/8" x 3-3/4"	2-3/8"	50	300
7616SD6	3/8" x 5"	3-5/8"	50	300
7617SD6	3/8" x 7"	5-5/8"	50	200
7620SD6*	1/2" x 2-3/4"	1"	50	200
7622SD6	1/2" x 3-3/4"	2"	50	200
7623SD6	1/2" x 4-1/2"	2-3/4"	50	200
7624SD6	1/2" x 5-1/2"	3-3/4"	50	100
7626SD6	1/2" x 7"	5-1/4"	25	100
7630SD6*	5/8" x 3-1/2"	1-1/2"	25	100
7632SD6	5/8" x 4-1/2"	2-1/2"	25	100
7633SD6	5/8" x 5"	3"	25	100

POWER-STUD®+ SD6, CONTINUED

CAT #	ANCHOR SIZE	THREAD LEN	CTN	MSTR
7634SD6	5/8" x 6"	4"	25	75
7636SD6	5/8" x 7"	5"	25	75
7638SD6	5/8" x 8-1/2"	6-1/2"	25	50
7640SD6*	3/4" x 4-1/4"	1-7/8"	20	60
7641SD6*	3/4" x 4-3/4"	2-3/8"	20	60
7642SD6	3/4" x 5-1/2"	3-1/8"	20	60
7644SD6	3/4" x 6-1/4"	3-7/8"	20	60
7646SD6	3/4" x 7"	4-5/8"	20	60
7648SD6	3/4" x 8-1/2"	6-1/8"	10	40

* Less than the minimum standard anchor length for Strength Design. Published length is the overall length of the anchor. Allow for fixture thickness plus one anchor diameter for the nut and washer thickness when selecting a length. Packaged with nuts and washers. Manual hand pump available (Cat. #08280). Hollow drill bits must be used with a dust extraction vacuum (Cat. #DW012).




UPGRADE FROM TRADITIONAL HOLE CLEANING



➤ Superior performance in damp or exterior environments



STRUCTURAL DESIGN SOFTWARE FOR ANCHORING TO CONCRETE

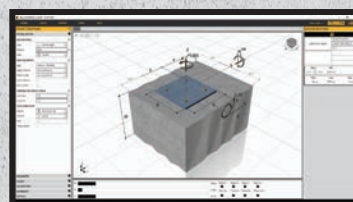

Download DDA™ and experience our free concrete anchoring design software.

DEWALT.COM/DDA

RELATED PRODUCTS



DCH293R2DH
20V MAX* XR® SDS PLUS
ROTARY HAMMER W/DUST
COLLECTION



DCH273P2DHO
20V MAX* XR® SDS PLUS ROTARY
HAMMER W/ON-BOARD DUST
EXTRACTOR



DWH050K
LARGE HAMMER DUST
EXTRACTION - HOLE CLEANING



DWV012
10-GALLON HEPA/RRP
WET/DRY DUST EXTRACTOR



HOLLOW DRILL BIT
SDS PLUS AND
SDS MAX CARBIDE

For 20V MAX Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

1-800-4-DEWALT

www.DEWALT.com

Copyright ©2021 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWS4SD6SS