

ProPuck LED

120V Undercabinet

Linkable Series

Catalog #:

Type:

Project:

Date:


Notes:



Surface Mount



Recessed Mount

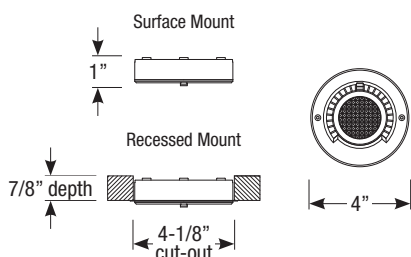

Electrical Data

Part Number	Wattage	Lumens	Efficacy
PPL	4.5W	250lm	56lpw

Specifications

Description

Slim puck lights are designed for recessed or surface mounted installations. System can be daisy chained together up to 100 units.

LED Light Engine

- 4.5W LED @ 2700K at 90 CRI
- 35,000 hours at 70% lumen maintenance (L70)

Electrical

- 120V input
- Dimmable with incandescent dimmer
- Linkable up to 450W (100 units)

Mounting

Surface mount housing included with mounting hardware. May be recessed mounted for a seamless installation.

For cabinet use only. Not intended for walls or ceilings.

Housing

- 1" surface mount housing with knockouts on sides and back
- Die-cast aluminum construction
- Solite lens, flange for recessed mount, surface mount housing, strain relief and mounting hardware included
- Internal terminal block included, no wire nuts or connectors needed

Finishes

Available in white, bronze, black or satin aluminum

Accessories

- PP-PLG - 6' Cord and plug available in black or white
- PP-CON - 1/2" Flexible conduit connector for side knockout only
- INVWC3 - Shallow 1" low profile wiring compartment. Meets UL 2028 standards.
- PP-CRD - SJT cable for connecting luminaires, available in black or white and lengths of 10' or 100'
- 0-16 - Prismatic spread lens replaces included solite lens
- 0-18 - Mini prismatic spread lens replaces included solite lens
- 0-19 - Linear spread lens replaces included solite lens

Listing

UL listed to US and Canadian standards for damp locations



Order Matrix

ProPuck Order Matrix (Example: PPL-BZ)

Series	Finish
PPL (ProPuck LED)	<input type="checkbox"/> -WT (White)
	<input type="checkbox"/> -BZ (Bronze)
	<input type="checkbox"/> -SA (Satin Aluminum)
	<input type="checkbox"/> -BK (Black)



1/2" Flexible Conduit Connector (Side Knockout)

Part Number
<input type="checkbox"/> PP-CON (1/2" Flexible Conduit Connector)



Wiring Compartment

Part Number
<input type="checkbox"/> INVWC3 (Low Profile Wiring Compartment)



Lens Accessories

Description
<input type="checkbox"/> 0-16 (Prismatic Spread Lens)
<input type="checkbox"/> 0-18 (Mini Prismatic Spread Lens)
<input type="checkbox"/> 0-19 (Linear Spread Lens)



6' Cord and Plug

Cable Length	Finish
PP-PLG (6')	<input type="checkbox"/> -WT (White)
	<input type="checkbox"/> -BK (Black)



Linking Cord (SJT cable)

Series	Cord Length	Finish
PP-CRD	<input type="checkbox"/> (blank) (10')	<input type="checkbox"/> -WT (White)
	<input type="checkbox"/> -100 (100')	<input type="checkbox"/> -BK (Black)

Revised 08/10/18