



LED Downlighting

Energy-Efficient
Recessed Lighting



5" Eco-Downlight LED	2
5" Trims	4
5" Details	6
3" Eco-Downlight LED	9
3" Eco-Downlight LED Adjustable	9
3" Round Trims	10
3" Adjustable Round Trims	10
3" Square Trims	12
3" Adjustable Square Trims	12
3" Details	14
1" Eco-Downlight LED	18
1" Trims	19
1" Details	20



The CSL LED Downlight line has been designed and engineered as a true, high-performance replacement for low-efficacy recessed lighting.

The CSL LED Downlights line offers environmentally efficient illumination, as well as the style, functionality and dependability that distinguishes CSL as an industry leader.

Available in 5", 3" and 1" apertures, these high-performance fixtures feature sustainable, zero-maintenance LED engines and meet L-70 standards.



Eco-Downlight LED

5" Recessed Downlights

Fixture

- High-performance COB LEDs:
 - 38W, 2,700°K, ± 50 , CRI 90, 2815 lm
 - 38W, 3,000°K, ± 50 , CRI 90, 3012 lm
 - 38W, 3,500°K ± 50 , CRI 90, 3012 lm
 - 38W, 4,000°K ± 50 , CRI 80, 3700 lm
- INC/ELV/0-10V Universal dimming

Housing/Heat Sink

New Construction and Remodel

- 30°, 50° and 80° optics included
- Extruded aluminum heat sink and stamped aluminum arm with black anodized finish
- Aluminum housing with black powder coat finish

IC / Airtight

- 30°, 50° and 80° optics included
- Extruded aluminum heat sink with black anodized finish
- Aluminum housing

New Construction (Non-IC)



EDL5-NC Series

120-277V 38W Integral Driver, 50/60 Hz,
INC/ELV/0-10V Universal dimming

Remodel / Retrofit



EDL5-RM Series

120-277V 38W Integral Driver, 50/60 Hz,
INC/ELV/0-10V Universal dimming

IC / Airtight



EDL5-IC Series

120-277V 38W Integral Driver, 50/60Hz,
INC/ELV/0-10V Universal dimming





Eco-Downlight LED

5"
Trims

Materials

- Trim rings: Diecast aluminum
- Reflectors and baffles:
Spun aluminum and diecast aluminum

Finishes

- Standard Finishes:
White Powder-Coat, Satin Aluminum
- RAL color matching available
(consult factory)

Accessories

- Optional 10° optic available
- Round and square trimless rings
available




EDL5-1000 Series

Reflectors Clear Alzak,
Black Alzak, Haze, White



EDL5-2000 Series

Reflectors White,
Black, Haze



EDL5-1100 Series

Baffles White, Black



EDL5-2100 Series

Baffles White, Black



EDL5-1200
Shower Light



EDL5-2200
Shower Light

Fixture

- Integral 120-277V input LED Driver, 38W output, 85% efficient, 0.90 power factor
- UL/C-UL Listed for damp location



LEDs

- High-performance COB LEDs:
 - 38W, 2,700°K, ± 50 , CRI 90, 2815 lm
 - 38W, 3,000°K, ± 50 , CRI 90, 3012 lm
 - 38W, 3,500°K ± 50 , CRI 90, 3012 lm
 - 38W, 4,000°K ± 50 , CRI 80, 3700 lm
- 2-step binning process
- 50,000 hours at 70% lumen maintenance (L70)
- LM79 test results available at csllighting.com
- Compatible with INC (incandescent/triac), ELV and 0-10V dimmers
- Field-replaceable light engine and driver

Housing/Heat Sink


New Construction and Remodel

- Extruded aluminum heat sink and stamped aluminum arm with black anodized finish
- Aluminum housing with black powder-coat finish
- Includes black oxide-coated, heat-treated spring steel mounting clips
- 30°, 50° and 80° optics included
- Adjusts vertically to accommodate ceiling thicknesses from 1/2" to 1"
- Galvanized steel plaster frame, adjustable hanger bars (EDL5-NC only)
- Stamped aluminum junction box with two 1/2" trade-size knockouts

IC / Airtight

- Extruded aluminum heat sink with black anodized finish
- Aluminum housing
- 30°, 50° and 80° optics included
- Galvanized plaster frame, adjustable hanger bars
- Galvanized junction box with six 1/2" trade-size knockouts

5" New Construction (Non-IC)

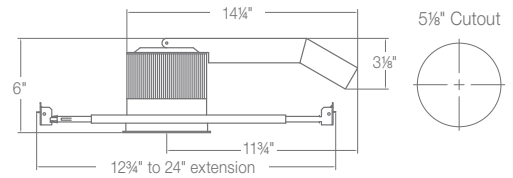


120-277V 38W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming

EDL5-NC-27-I	LED, 2,700°K ± 50 °K, CRI 90, 2,815 lm
EDL5-NC-30-I	LED, 3,000°K ± 50 °K, CRI 90, 3,012 lm
EDL5-NC-35-I	LED, 3,500°K ± 50 °K, CRI 90, 3,012 lm
EDL5-NC-40-I	LED, 4,000°K ± 50 °K, CRI 80, 3,700 lm

5" Remodel/Retrofit


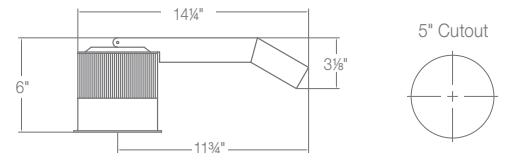


120-277V 38W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming

EDL5-RM-27-I	LED, 2,700°K ± 50 °K, CRI 90, 2,815 lm
EDL5-RM-30-I	LED, 3,000°K ± 50 °K, CRI 90, 3,012 lm
EDL5-RM-35-I	LED, 3,500°K ± 50 °K, CRI 90, 3,012 lm
EDL5-RM-40-I	LED, 4,000°K ± 50 °K, CRI 80, 3,700 lm

IC/Airtight

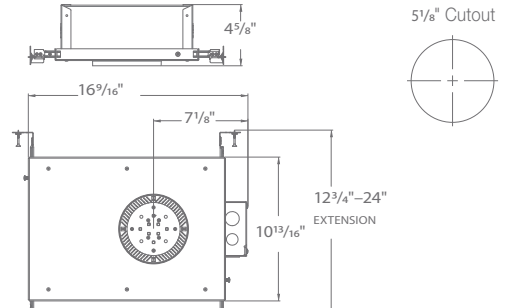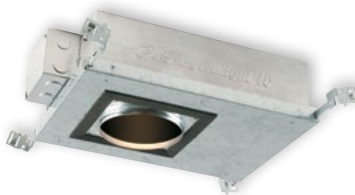


120-277V 38W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming


EDL5-IC-27-I	LED, 2,700°K ± 50 °K, CRI 90, 2,815 lm
EDL5-IC-30-I	LED, 3,000°K ± 50 °K, CRI 90, 3,012 lm
EDL5-IC-35-I	LED, 3,500°K ± 50 °K, CRI 90, 3,012 lm
EDL5-IC-40-I	LED, 4,000°K ± 50 °K, CRI 80, 3,700 lm

5" Round Trims


NUMBER	TRIM FINISH	REFLECTOR/BAFFLE
EDL5-1000-1	White	Clear Alzak Reflector
EDL5-1001-1	White	Black Alzak Reflector
EDL5-1002-1	Satin Aluminum	Clear Alzak Reflector
EDL5-1003-1	Satin Aluminum	Black Alzak Reflector
EDL5-1004-1	White	Haze Reflector
EDL5-1005-1	Satin Aluminum	Haze Reflector
EDL5-1006-1	White	White Reflector
EDL5-1100-1	White	White Baffle
EDL5-1101-1	White	Black Baffle
EDL5-1102-1	Satin Aluminum	Black Baffle
EDL5-1200-1	White	Shower Light



EDL5-1000 Series



EDL5-1100 Series



EDL5-1200

Materials

- Trim Rings: Diecast aluminum
- Reflectors and Baffles: Round – Spun aluminum and diecast aluminum
Square – Diecast aluminum

Finishes


- Standard Finishes: White Powder-Coat, Satin Aluminum
- RAL color matching available (consult factory)

Accessories


- Optional 10° optic available
- Round and square trimless rings available

5" Square Trims


NUMBER	TRIM FINISH	REFLECTOR/BAFFLE
EDL5-2000-1	White	White Reflector
EDL5-2001-1	White	Black Reflector
EDL5-2002-1	White	Haze Reflector
EDL5-2003-1	Satin Aluminum	Black Reflector
EDL5-2004-1	Satin Aluminum	Haze Reflector
EDL5-2100-1	White	White Baffle
EDL5-2101-1	White	Black Baffle
EDL5-2102-1	Satin Aluminum	Black Baffle
EDL5-2200-1	White	Shower Light



EDL5-2000 Series



EDL5-2100 Series



EDL5-2200

Details

5" Fixtures, Trims and Accessories


5" Accessories

NUMBER	DESCRIPTION
EDL5-RD-TL	Round Trimless Ring
EDL5-SQ-TL	Square Trimless Ring
EDL5-10-OPTIC-1	10° Optic



Eco-Downlight LED

3"
Recessed
Downlights

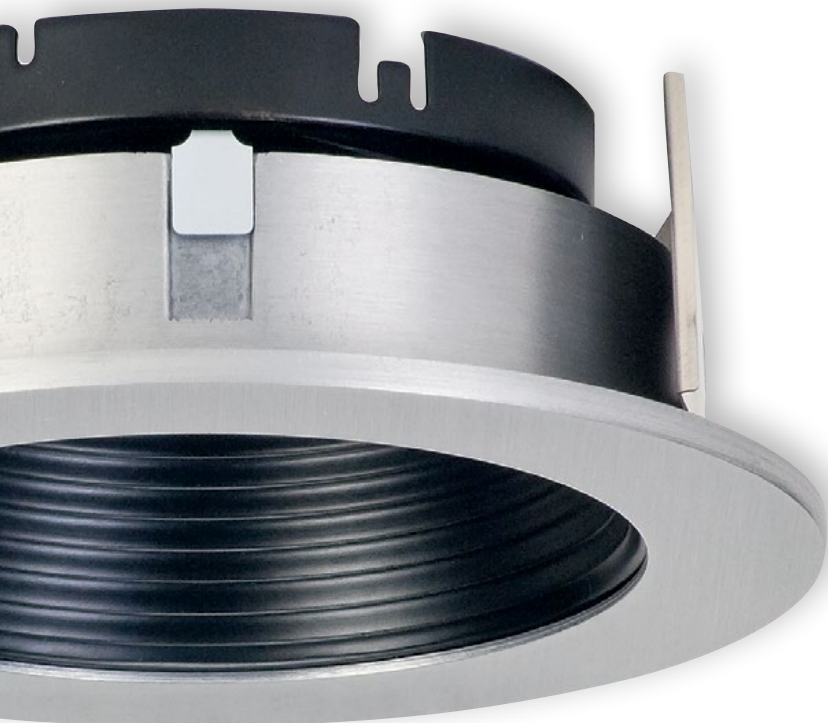

Fixture

- High-performance COB LEDs:
 - 24W, 2,700°K $\pm$ 50, CRI 90, 1900 lm
 - 24W, 3,000°K $\pm$ 50, CRI 90, 2035 lm
 - 24W, 3,500°K $\pm$ 50, CRI 90, 2186 lm
 - 24W, 4,000°K $\pm$ 50, CRI 80, 2691 lm
- INC/ELV/0-10V Universal dimming

Housing / Heat Sink

New Construction (Non-IC) and Remodel / Retrofit:

- 30°, 50° and 80° optics included
- Extruded aluminum heat sink with black anodized finish
- Cold-rolled steel housing with black powder-coat finish

IC / Airtight / Adjustable:

- 30°, 50° and 80° optics included
- Suitable for insulated ceilings and airtight applications
- Adjustable, rotating heat sink:
 - Vertical aiming – up to 45° tilt
 - Horizontal aiming – 359° rotation
- Extruded aluminum heat sink with black anodized finish

New Construction (Non-IC)



EDL-NC Series

120-277V 24W Integral Driver,
50/60 Hz, INC/ELV/0-10V
Universal dimming

Remodel / Retrofit



EDL-RM Series

120-277V 24W Integral Driver,
50/60 Hz, INC/ELV/0-10V
Universal dimming

IC / Airtight / Adjustable



EDL-ADJ Series

120-277V 24W Integral Driver,
50/60 Hz, INC/ELV/0-10V
Universal dimming



Eco-Downlight LED

3" Round Trims

Materials

- Trim rings: Diecast aluminum
- Reflectors and baffles: Spun aluminum

Finishes

- Standard Finishes: White Powder-Coat, Bronze, Satin Aluminum
- RAL color matching available (consult factory)

Accessories

- Optional 10° optic available
- Round trimless rings available



Adjustable



EDL-1000 Series

Reflectors Clear Alzak,
Black Alzak, Haze, Bronze, White



EDL-3000 Series

Adjust All
Lens Solite Glass



EDL-1100 Series

Baffles White, Black, Bronze



EDL-1300 Series

Adjust 0°-35°
Reflectors Clear Alzak,
Black Alzak, Haze, Bronze



EDL-1200

Shower Light



EDL-1400 Series

Adjust 0°-35°
Baffles White, Black, Bronze



Adjustable



EDL-2000 Series

Reflectors

White, Black, Haze, Bronze




EDL-1500 Series

Adjusts 0-35°


Reflectors

White, Black, Haze, Bronze



EDL-2100 Series

Baffles White, Black, Bronze



EDL-1600 Series

Adjusts 0-35°

Baffles White, Black, Bronze



EDL-2200

Shower Light



EDL-4000 Series

Adjust All

Lens Solite Glass



Eco-Downlight LED

3"
Square
Trims

Materials

- Trim rings: Diecast aluminum
- Reflectors and baffles: Diecast aluminum

Finishes

- Standard Finishes: White Powder-Coat, Satin Aluminum, Bronze
- RAL color matching available (consult factory)

Accessories

- Optional 10° optic available
- Square trimless rings available

Details

3" Recessed Downlights

Fixture

- Integral 120-277V input LED Driver, 24W, 90% efficient, 0.99 power factor
- Emergency remote battery backup available
- UL/C-UL Listed for damp location




LEDs

- High-performance COB LEDs:
 - 24W, 2,700°K ± 50 , CRI 90, 1900 lm
 - 24W, 3,000°K ± 50 , CRI 90, 2035 lm
 - 24W, 3,500°K ± 50 , CRI 90, 2186 lm
 - 24W, 4,000°K ± 50 , CRI 80, 2691 lm
- 2-step binning process
- 50,000 hours at 70% lumen maintenance (L70)
- LM79 test results available at cslighting.com
- INC/ELV/0-10V Universal dimming.
- Field-replaceable light engine and driver

Housing/Heat Sink

- 30°, 50° and 80° optics included
- Extruded aluminum heat sink with black anodized finish
- Cold-rolled steel housing with black powder-coat finish
- Includes black oxide-coated, heat-treated spring steel mounting clips
- Adjusts vertically to accommodate ceiling thicknesses from 1/2" to 1"
- Galvanized steel plaster frame, adjustable hanger bars (EDL-NC only)
- Stamped aluminum junction box with two 1/2" trade-size knockouts

3" New Construction (Non-IC)

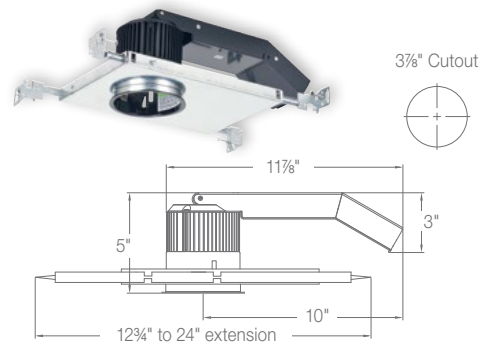


120-277V 24W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming

EDL-NC-27-4	LED, 2,700°K ± 50 °K, CRI 90, 1900 lm
EDL-NC-30-4	LED, 3,000°K ± 50 °K, CRI 90, 2035 lm
EDL-NC-35-4	LED, 3,500°K ± 50 °K, CRI 90, 2186 lm
EDL-NC-40-4	LED, 4,000°K ± 50 °K, CRI 80, 2691 lm

3" Remodel/Retrofit

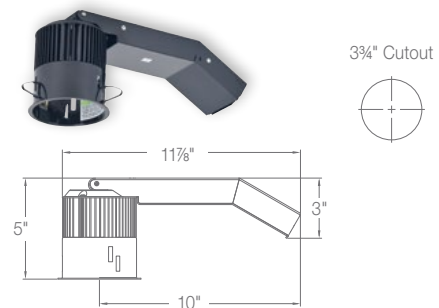


120-277V 24W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming

EDL-RM-27-4	LED, 2,700°K ± 50 °K, CRI 90, 1900 lm
EDL-RM-30-4	LED, 3,000°K ± 50 °K, CRI 90, 2035 lm
EDL-RM-35-4	LED, 3,500°K ± 50 °K, CRI 90, 2186 lm
EDL-RM-40-4	LED, 4,000°K ± 50 °K, CRI 80, 2691 lm

3" IC / Airtight / Adjustable

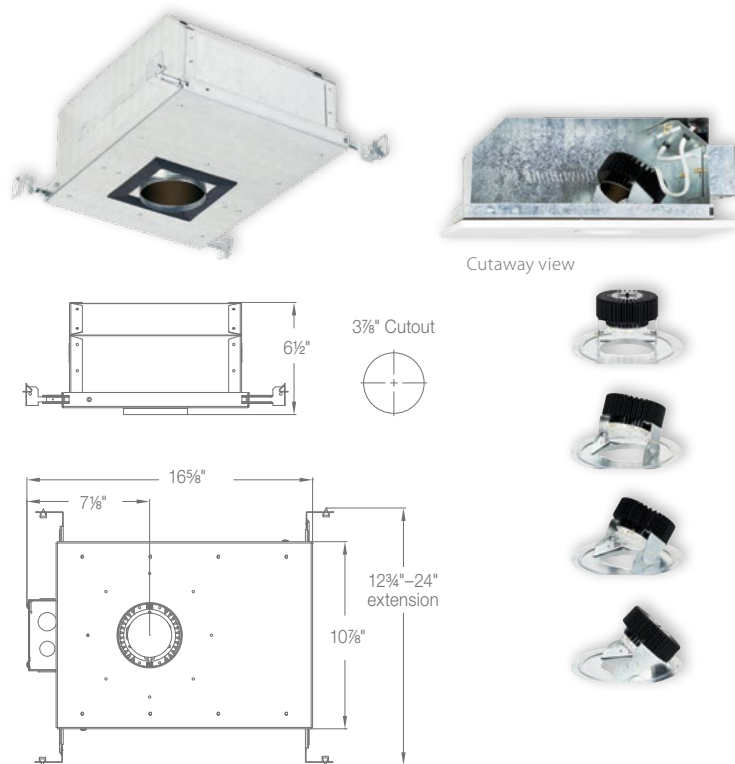

120-277V 24W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming

EDL-ADJ-27-4	LED, 2,700°K ±50°K, CRI 90, 1900 lm
EDL-ADJ-30-4	LED, 3,000°K ±50°K, CRI 90, 2035 lm
EDL-ADJ-35-4	LED, 3,500°K ±50°K, CRI 90, 2186 lm
EDL-ADJ-40-4	LED, 4,000°K ±50°K, CRI 80, 2691 lm

Emergency Remote Battery Pack

for use with all 3" Eco-Downlight fixtures

EM-1000	25W LED Battery Pack
---------	----------------------

Fixture

- Integral 120-277V input LED Driver, 24W output, 90% efficient, 0.99 power factor
- UL/C-UL Listed for damp location

LEDs

- High-performance COB LEDs:
 - 24W, 2,700°K ±50, CRI 90, 1900 lm
 - 24W, 3,000°K ±50, CRI 90, 2035 lm
 - 24W, 3,500°K ±50, CRI 90, 2186 lm
 - 24W, 4,000°K ±50, CRI 80, 2691 lm
- 2-step binning process
- 50,000 hours at 70% lumen maintenance (L70)
- LM79 test results available at csllighting.com
- Compatible with INC (incandescent/triac), ELV and 0-10V dimmers
- Field-replaceable light engine and driver

Housing / Heat Sink




- 30°, 50° and 80° optics included
- Suitable for insulated ceilings and airtight applications
- Adjustable, rotating heat sink:
 - Vertical aiming up to 45° tilt
 - Horizontal aiming 359° rotation
- Extruded aluminum heat sink with black anodized finish
- Galvanized steel airtight housing with adjustable hanger bars
- Accommodates ceiling thicknesses from 1/2" to 1"
- Galvanized junction box with six 1/2" trade-size knockouts

Details

3" Trims and Accessories




3" Round Trims

NUMBER	TRIM FINISH	REFLECTOR/BAFFLE
EDL-1000-4	White	Clear Alzak Reflector
EDL-1001-4	White	Black Alzak Reflector
EDL-1002-4	Satin Aluminum	Clear Alzak Reflector
EDL-1003-4	Satin Aluminum	Black Alzak Reflector
EDL-1004-4	White	Haze Reflector
EDL-1005-4	Satin Aluminum	Haze Reflector
EDL-1006-4	White	White Reflector
EDL-1007-4	Bronze	Bronze Reflector
EDL-1100-4	White	White Baffle
EDL-1101-4	White	Black Baffle
EDL-1102-4	Satin Aluminum	Black Baffle
EDL-1103-4	Bronze	Bronze Baffle
EDL-1200-4	White	Shower Light
EDL-1201-4	Satin Aluminum	Shower Light



3" Square Trims

NUMBER	TRIM FINISH	REFLECTOR/BAFFLE
EDL-2000-4	White	White Reflector
EDL-2001-4	White	Black Reflector
EDL-2002-4	White	Haze Reflector
EDL-2003-4	Satin Aluminum	Black Reflector
EDL-2004-4	Satin Aluminum	Haze Reflector
EDL-2005-4	Bronze	Bronze Reflector
EDL-2100-4	White	White Baffle
EDL-2101-4	White	Black Baffle
EDL-2102-4	Satin Aluminum	Black Baffle
EDL-2103-4	Bronze	Bronze Baffle
EDL-2200-4	White	Shower Light
EDL-2201-4	Satin Aluminum	Shower Light



3" Accessories

NUMBER	DESCRIPTION
EDL-RD-TL	Round Trimless Ring
EDL-SQ-TL	Square Trimless Ring
EDL-10-OPTIC-4	10° Optic



3" Round Trimless Ring




3" Square Trimless Ring

3" Round Adjustable Trims

NUMBER	ADJUSTMENT	TRIM FINISH	REFLECTOR/ BAFFLE/LENS
EDL-3000-4	Adjust All	White	Solite Glass
EDL-3001-4	Adjust All	Satin Aluminum	Solite Glass
EDL-3002-4	Adjust All	Bronze	Solite Glass
EDL-1300-4	0°-35°	White	Clear Alzak Reflector
EDL-1301-4	0°-35°	White	Black Alzak Reflector
EDL-1302-4	0°-35°	Satin Aluminum	Clear Alzak Reflector
EDL-1303-4	0°-35°	Satin Aluminum	Black Alzak Reflector
EDL-1304-4	0°-35°	White	Haze Reflector
EDL-1305-4	0°-35°	Satin Aluminum	Haze Reflector
EDL-1306-4	0°-35°	White	White Reflector
EDL-1307-4	0°-35°	Bronze	Bronze Reflector
EDL-1400-4	0°-35°	White	White Baffle
EDL-1401-4	0°-35°	White	Black Baffle
EDL-1402-4	0°-35°	Satin Aluminum	Black Baffle
EDL-1403-4	0°-35°	Bronze	Bronze Baffle



EDL-3000 Series



EDL-1300 Series



EDL-1400 Series

Materials

- Trim rings: Diecast aluminum
- Reflectors and baffles:
Round – Spun aluminum and diecast aluminum
Square – Diecast aluminum

Finishes


- Standard Finishes: White Powder-Coat, Satin Aluminum, Bronze
- RAL color matching available (consult factory)

Accessories


- Optional 10° optic available
- Round and square trimless rings available

3" Square Adjustable Trims

NUMBER	ADJUSTMENT	TRIM FINISH	LENS
EDL-1500-4	0°-35°	White	White Reflector
EDL-1501-4	0°-35°	White	Black Alzak Reflector
EDL-1502-4	0°-35°	White	Haze Reflector
EDL-1503-4	0°-35°	Satin Aluminum	Black Alzak Reflector
EDL-1504-4	0°-35°	Satin Aluminum	Haze Reflector
EDL-1505-4	0°-35°	Bronze	Bronze Reflector
EDL-1600-4	0°-35°	White	White Baffle
EDL-1601-4	0°-35°	White	Black Baffle
EDL-1602-4	0°-35°	Satin Aluminum	Black Baffle
EDL-1603-4	0°-35°	Bronze	Bronze Baffle
EDL-4000-4	Adjust All	White	Solite Glass
EDL-4001-4	Adjust All	Satin Aluminum	Solite Glass
EDL-4002-4	Adjust All	Bronze	Solite Glass



EDL-1500 Series



EDL-1600 Series



EDL-4000 Series



Eco-Downlight LED

1" Recessed Downlights

Fixture

- High-performance COB LEDs:
 - 14W, 2,700°K, ± 50 , CRI 90, 980 lm
 - 14W, 3,000°K, ± 50 , CRI 90, 1074 lm
 - 14W, 3,500°K ± 50 , CRI 90, 1157 lm
 - 14W, 4,000°K ± 50 , CRI 80, 1250 lm
- INC/ELV/0-10V Universal dimming

Housing / Heat Sink

New Construction (Non-IC) and Remodel / Retrofit:

- 30°, 50° and 80° optics included
- Extruded aluminum heat sink with black anodized finish
- Cold-rolled steel housing with black powder-coat finish

IC / Airtight / Adjustable

- 30°, 50° and 80° optics included
- Suitable for insulated ceilings and airtight applications
- Extruded aluminum heat sink with black anodized finish

New Construction (Non-IC)



EDLM-NC Series

120V-277V 14W
Integral Driver, 50/60 Hz,
INC/ELV/0-10V Universal
dimming

Remodel / Retrofit



EDLM-RM Series

120V-277V 14W
Integral Driver, 50/60 Hz,
INC/ELV/0-10V Universal
dimming

IC / Airtight / Adjustable



EDLM-IC Series

120V-277V 14W
Integral Driver, 50/60 Hz,
INC/ELV/0-10V Universal
dimming



Eco-Downlight LED

1"
Trims



EDLM-1000 Series

Reflectors Black Alzak, Haze, White,



EDLM-2000 Series

Reflectors Black Alzak, Haze, White,



EDLM-1100 Series

Baffles White, Black



EDLM-2100 Series

Baffles White, Black



EDLM-1200

Shower Light



EDLM-2200

Shower Light

Materials

- Trim rings: Diecast aluminum
- Reflectors and baffles: Spun aluminum

Finishes

- Standard Finishes: White Powder-Coat, Satin Aluminum
- RAL color matching available (consult factory)

Accessories°

- Optional 10° optic available
- Round and square trimless rings available

Details

1" Fixtures and Trims

Fixture

- Integral, 120V-277V input LED Driver, 14W output, 90% efficient, 0.99 power factor
- UL/C-UL Listed for damp location 

LEDs

- High-performance COB LEDs:
 - 14W, 2,700°K, ± 50 , CRI 90, 980 lm
 - 14W, 3,000°K, ± 50 , CRI 90, 1074 lm
 - 14W, 3,500°K ± 50 , CRI 90, 1157 lm
 - 14W, 4,000°K ± 50 , CRI 80, 1250 lm
- 2-step binning process
- 50,000 hours at 70% lumen maintenance (L70)
- Compatible with INC (incandescent/triac), ELV and 0-10V dimmers
- Field-replaceable light engine and driver

Housing / Heat Sink


New Construction (Non-IC) and Remodel / Retrofit:

- 30°, 50° and 80° optics included
- Extruded aluminum heat sink with black anodized finish
- Cold-rolled steel housing with black powder-coat finish
- Supplied with black oxide-coated, heat-treated spring steel mounting clips
- Adjusts vertically to accommodate ceiling thicknesses from 1/2" to 1"
- Galvanized steel plaster frame, adjustable hanger bars (EDLM-NC only)
- Aluminum junction box with one 1/2" trade-size knockout

IC / Airtight / Adjustable :

- 30°, 50° and 80° optics included
- Suitable for insulated ceilings and airtight applications
- Adjustable, black anodized rotating heat sink: Vertical aiming up to 15° tilt, horizontal aiming 359° rotation
- Galvanized steel airtight housing with adjustable hanger bars
- Accommodates ceiling thicknesses from 1/2" to 1"
- Galvanized junction box with six 1/2" trade-size knockouts

1" New Construction (Non-IC)

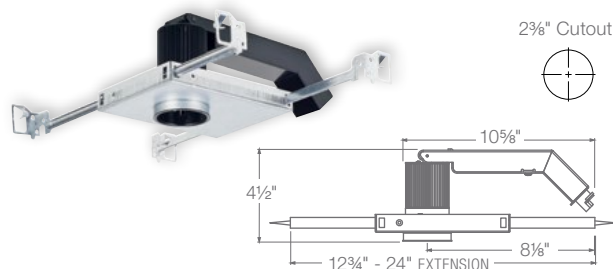


120V-277V 14W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming

EDLM-NC-27-3	LED, 2,700°K ± 50 °K, CRI 90, 980 lm
EDLM-NC-30-3	LED, 3,000°K ± 50 °K, CRI 90, 1074 lm
EDLM-NC-35-3	LED, 3,500°K ± 50 °K, CRI 90, 1157 lm
EDLM-NC-40-3	LED, 4,000°K ± 50 °K, CRI 80, 1250 lm

1" Remodel / Retrofit

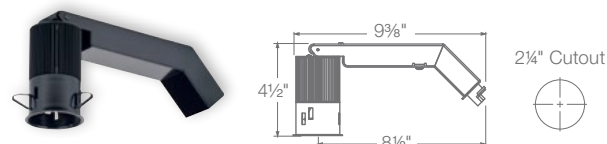


120V-277V 14W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming

EDLM-RM-27-3	LED, 2,700°K ± 50 °K, CRI 90, 980 lm
EDLM-RM-30-3	LED, 3,000°K ± 50 °K, CRI 90, 1074 lm
EDLM-RM-35-3	LED, 3,500°K ± 50 °K, CRI 90, 1157 lm
EDLM-RM-40-3	LED, 4,000°K ± 50 °K, CRI 80, 1250 lm

1" IC / Airtight / Adjustable

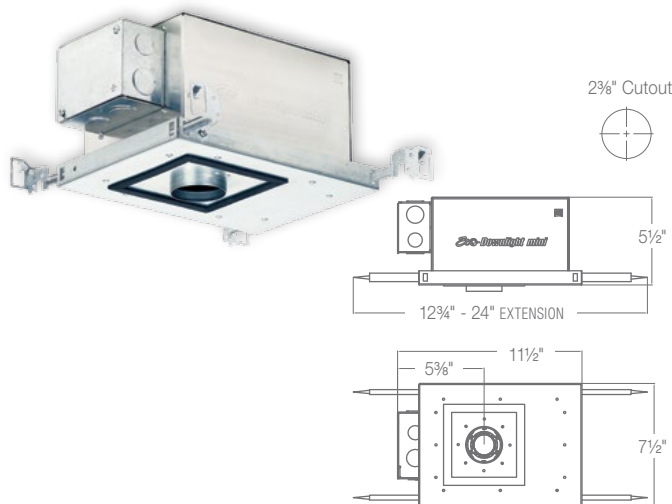


120V-277V 14W Integral Driver

50/60 Hz, INC/ELV/0-10V Universal dimming


EDLM-ADJ-27-3	LED, 2,700°K ± 50 °K, CRI 90, 980 lm
EDLM-ADJ-30-3	LED, 3,000°K ± 50 °K, CRI 90, 1074 lm
EDLM-ADJ-35-3	LED, 3,500°K ± 50 °K, CRI 90, 1157 lm
EDLM-ADJ-40-3	LED, 4,000°K ± 50 °K, CRI 80, 1250 lm

1" Round Trims


NUMBER	TRIM FINISH	REFLECTOR/BAFFLE
EDLM-1001-3	White	Black Alzak Reflector
EDLM-1003-3	Satin Aluminum	Black Alzak Reflector
EDLM-1004-3	White	Haze Reflector
EDLM-1005-3	Satin Aluminum	Haze Reflector
EDLM-1006-3	White	White Reflector
EDLM-1100-3	White	White Baffle
EDLM-1101-3	White	Black Baffle
EDLM-1102-3	Satin Aluminum	Black Baffle
EDLM-1200-3	White	Shower Light



EDLM-1000 Series




EDLM-1100 Series




EDLM-1200

1" Round Adjustable Trims

NUMBER	TRIM FINISH	REFLECTOR/BAFFLE
EDLM-1301-3	White	Black Alzak Reflector
EDLM-1303-3	Satin Aluminum	Black Alzak Reflector
EDLM-1304-3	White	Haze Reflector
EDLM-1305-3	Satin Aluminum	Haze Reflector
EDLM-1306-3	White	White Reflector
EDLM-1400-3	White	White Baffle
EDLM-1401-3	White	Black Baffle
EDLM-1402-3	Satin Aluminum	Black Baffle




EDLM-1300 Series




EDLM-1400 Series

1" Square Trims


NUMBER	TRIM FINISH	REFLECTOR/BAFFLE
EDLM-2001-3	White	Black Alzak Reflector
EDLM-2003-3	Satin Aluminum	Black Alzak Reflector
EDLM-2004-3	White	Haze Reflector
EDLM-2005-3	Satin Aluminum	Haze Reflector
EDLM-2006-3	White	White Reflector
EDLM-2100-3	White	White Baffle
EDLM-2101-3	White	Black Baffle
EDLM-2102-3	Satin Aluminum	Black Baffle
EDLM-2200-3	White	Shower Light



EDLM-2000 Series




EDLM-2100 Series




EDLM-2200 Series

1" Square Adjustable Trims

NUMBER	TRIM FINISH	REFLECTOR/BAFFLE
EDLM-1501-3	White	Black Alzak Reflector
EDLM-1503-3	Satin Aluminum	Black Alzak Reflector
EDLM-1504-3	White	Haze Reflector
EDLM-1505-3	Satin Aluminum	Haze Reflector
EDLM-1506-3	White	White Reflector
EDLM-1600-3	White	White Baffle
EDLM-1601-3	White	Black Baffle
EDLM-1602-3	Satin Aluminum	Black Baffle



EDLM-1500 Series



EDLM-1600 Series

Materials

- Trim Rings: Diecast aluminum
- Reflectors and Baffles: Spun aluminum

Finishes

- Standard Finishes:
White Powder-Coat, Satin Aluminum
- RAL color matching available
(consult factory)

1" Accessories

EDLM-10-OPTIC-3	10° Optic
EDLM-RD-TL	Round Trimless Ring
EDLM-SQ-TL	Square Trimless Ring



A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue
City of Industry CA 91744
Tel: 626.336.4511
Fax: 626.330.4266
www.csllighting.com



C-CECOD5-14

