

Five Function Valve

The Five Function Valve is easily installed and allows simple, one-handed operation. The valve upgrades Chem-Tech Series 100 metering pumps, plus all Pulsatron models up to 240 GPD. The Five Function Valve is packed with features that increase safety, enhance performance and generally improves the convenience of operation.

The functions are selected by setting two dual position selector knobs. The label on the back panel of the valve identifies each function with selector knob positions.

The Five Function Valve is compatible with most Pulsatron, and Chem-Tech Series pumps. Connected to the existing discharge valve the Five Function Valve is capable of handling a large output flow as well as viscous liquids. A return port located on the side body provides flow of chemical back to the solution tank when in the air bleed or drain discharge mode.

FEATURES

- Pressure Relief
- Back Pressure – Maintains output reproducibility and allows metering into atmospheric discharge.
- Anti-Siphon – Prevents siphoning through the pump when point of injection is lower than the pump or into the suction line of another pump. Rated at total vacuum.
- Air Bleed – Used during priming to manually remove air from the pump head.
- Discharge Drain – Depressurize pump discharge line without loosening tubing or fittings.

BENEFITS

- Relieve excessive pressure in discharge line to protect connections and tubing.
- Maintain output reproducibility.
- Prevents siphoning.



AFTERMARKET

- Water Meters
- Gauges
- Dampeners
- Pressure Relief Valves
- KOPkits
- Tanks
- Pre-Engineered Systems


SPECIFICATIONS

Five Function Valve Selection Guide		L380	-	-	---	---
Five Function Valve	L380	=	Five Function Valve			
Max Pressure Rating	D	=	100 PSI			
	F	=	150 PSI			
	K	=	300 PSI			
O-Ring Material	T	=	TFE			
Connection Size	01	=	3/8" (0.95 cm) OD Tubing Connection			
	03	=	1/2" (1.27 cm) OD Tubing Connection			
	0P	=	4 x 6 mm			
	0N	=	4 x 10 mm			
	0S	=	6 x 10 mm			
	0Y	=	6 x 12 mm			
	0Q	=	10 x 14 mm			
Body Materials	PVD	=	Polyvinylidene Fluoride (PVDF or Kynar)			
	FPP	=	Glass Filled Polypropylene			

ENGINEERING DATA

Valve Body Materials Available	GFPPL, PVDF
Diaphragm	PTFE-faced CSPE
O-Rings	PTFE
Hardware	188 SS
Maximum Flow	240 GPD (37.85 LPH)
Maximum Viscosity	1000 CPS
Maximum Operating Pressure	250 PSI (17 BAR)
Pressure Relief Settings: (nominal cracking pressure)	275 PSI (19 BAR) – red 175 PSI (12 BAR) – green 125 PSI (8.6 BAR) – blue
Note:	Pressure relief will occur within 50% of maximum rating of pump.

Important: Material Code - GFPPL=Glass-filled Polypropylene, PVC=Polyvinyl Chloride, PE=Polyethylene, PVDF=Polyvinylidene Fluoride, CSPE=Generic formulation of Hypalon, a registered trademark of E.I. DuPont Company. Viton is a registered trademark of E.I. DuPont Company. PVC wetted end recommended for sodium hypochlorite.

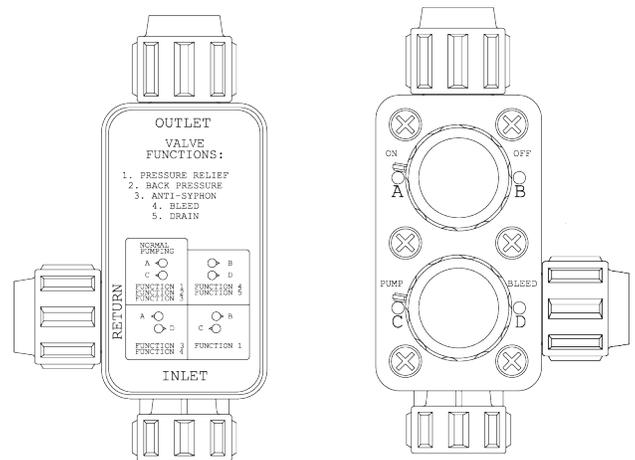

BACK VIEW

FRONT VIEW



27101 Airport Road
Punta Gorda, FL 33982
Tel: (941) 575-3800
www.pulsafeeder.com



An ISO Certified Company



FV001 G25