

ContourLine
30" Convection Oven

H 6780 BP



ContourLine 30" Convection Oven

H 6780 BP



H 6780 BP

Features:

- M Touch controls are both easy-to-operate and navigate. An intuitive swipe of the screen will quickly lead you to your desired selection
- Self Clean Oven
- 19 Operating Modes including Moisture Plus (plumbed only) increases the humidity in the oven optimizing the cooking of a variety of foods
- MasterChef Plus - fully functional automatic programs to create 15 different types of bread at home
- MasterChef menu offers over 100 food types to cook to perfection
- Wireless Roast Probe for safe, easy handling and perfect roasting results
- Favorites - up to 20 recipes
- Sabbath Program
- NEW: CleanGlass Door - for easier cleaning and superior design
- TwinPower Fans provide optimum and even distribution of hot air
- Soft Open and Soft Close for an easier handling
- ComfortSwivel Handle



SPECIFICATIONS

H 6780 BP— Item 22678053USA

Overall Unit Width - Excluding Fascia Dimension 28⁷/₁₆" (722 mm)

Overall Unit Height - Excluding Fascia Dimension 27³/₄" (705 mm)

Overall Unit Depth- Excluding Fascia Dimension 23³/₄" (603 mm)

Oven Door Clearance 22" (558 mm)

Overall Fascia Dimensions 29¹³/₁₆" (757 mm) W x 28⁵/₈" (727 mm) H x 7⁷/₈" (23mm) D

Built-In

Minimum Cabinet Opening Width 28¹/₂" (724 mm)

Minimum Cabinet Opening Depth 24" (610 mm)

Minimum Cabinet Opening Height 28¹/₄" (718 mm)

Minimum Base Support 250 lbs (113 kg)

Additional Cut-outs Required Cut-out 4" x 28" (100 cm x 720 cm) in the bottom of the cabinet for power cord and ventilation

Plumbing

Water Supply Requirements Connect to a cold water supply with a inline water filter only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 14.5 psi (1 bar) and may not exceed 145 psi (10 bar). If the pressure is higher than 145 psi (10 bar), a pressure reducing valve must be installed. The supplied hose has a length of 4'11" (1.5 m). The hose must not be shortened. The entire hose length must not exceed 24'7" (7.5 m).

Plumbed Hose Connection Supplied hose: flexible braided 4'11" (1.5 m) with 3/8" Compression fitting for connection to a shut off valve.

Electrical

Electrical Requirements 120/240V, 60Hz, 30A
120/208V, 60Hz, 30A

Power Cord NEMA 14-30 plug, 6 ft (1.8 m)

Shipping

Shipping Weight 216 lbs (98 kg)

Shipping Dimensions 32¹/₁₆" W x 35¹/₁₆" H x 30⁵/₁₆" L

Support

Call Miele (800) 999-1360

Miele Website www.mieleusa.com


20/20 Link 2020technologies.com

ContourLine 30" Convection Oven H 6780 BP



PRODUCT VIEWS

Isometric View

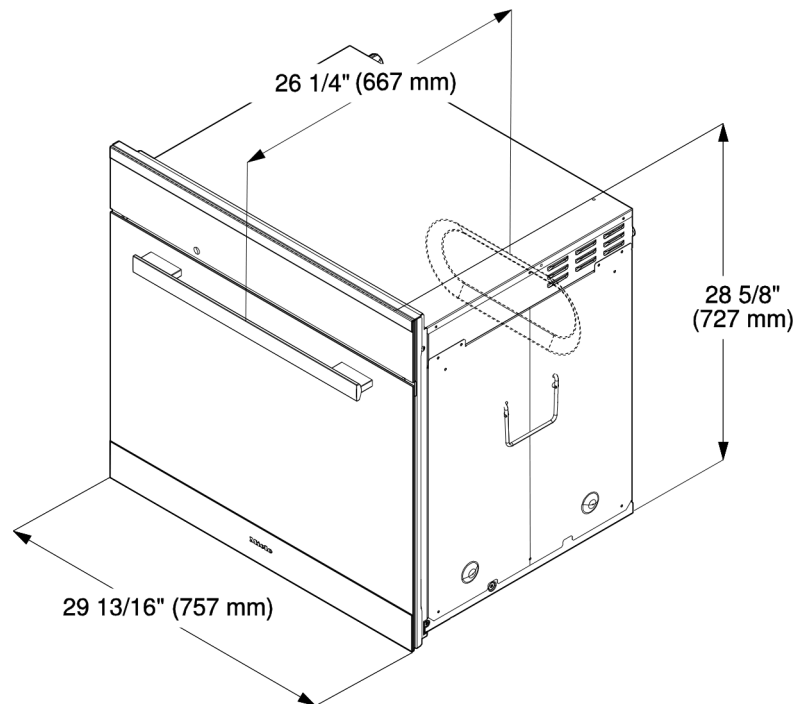

Front View




ContourLine 30" Convection Oven H 6780 BP




PRODUCT VIEWS

Top View

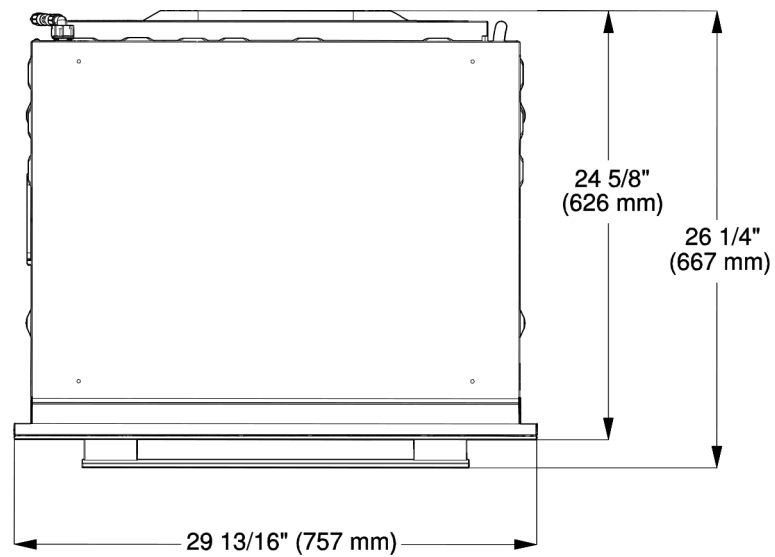

Rear View

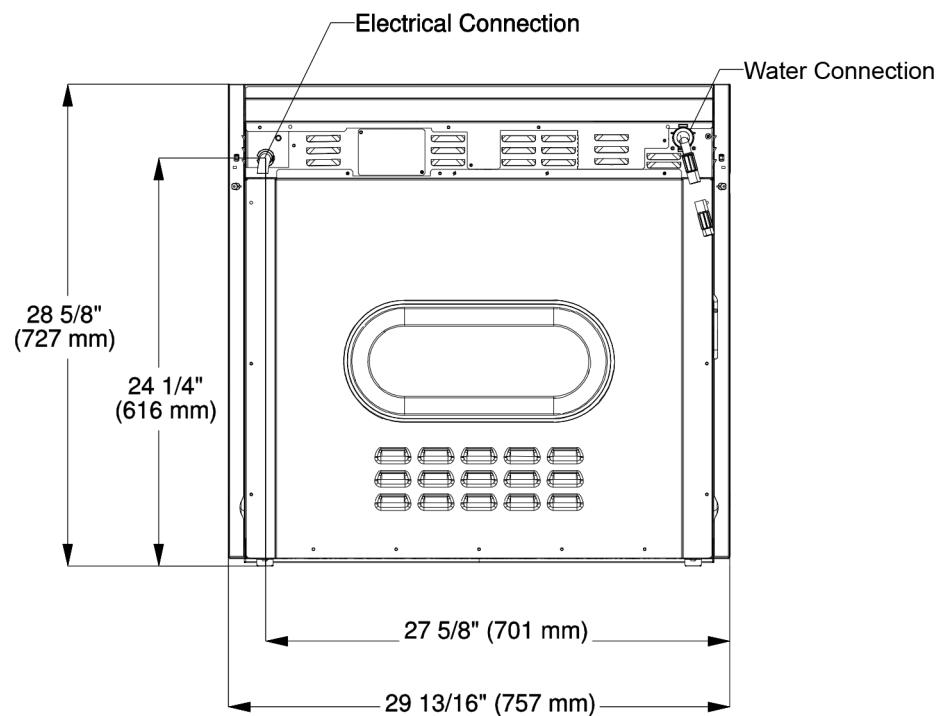


ContourLine 30" Convection Oven H 6780 BP




PRODUCT VIEWS

Side View

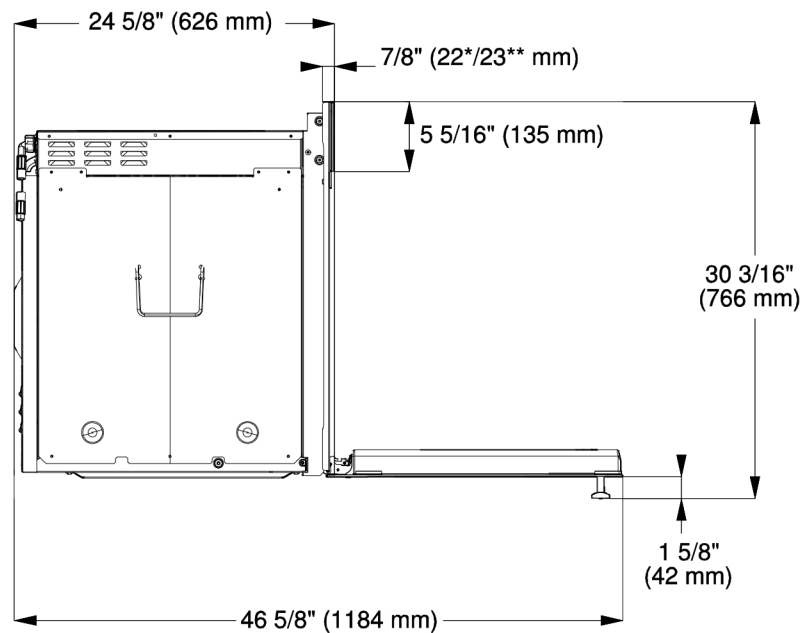

* Oven with glass front
** Oven with metal front

DOOR SWING DETAILS

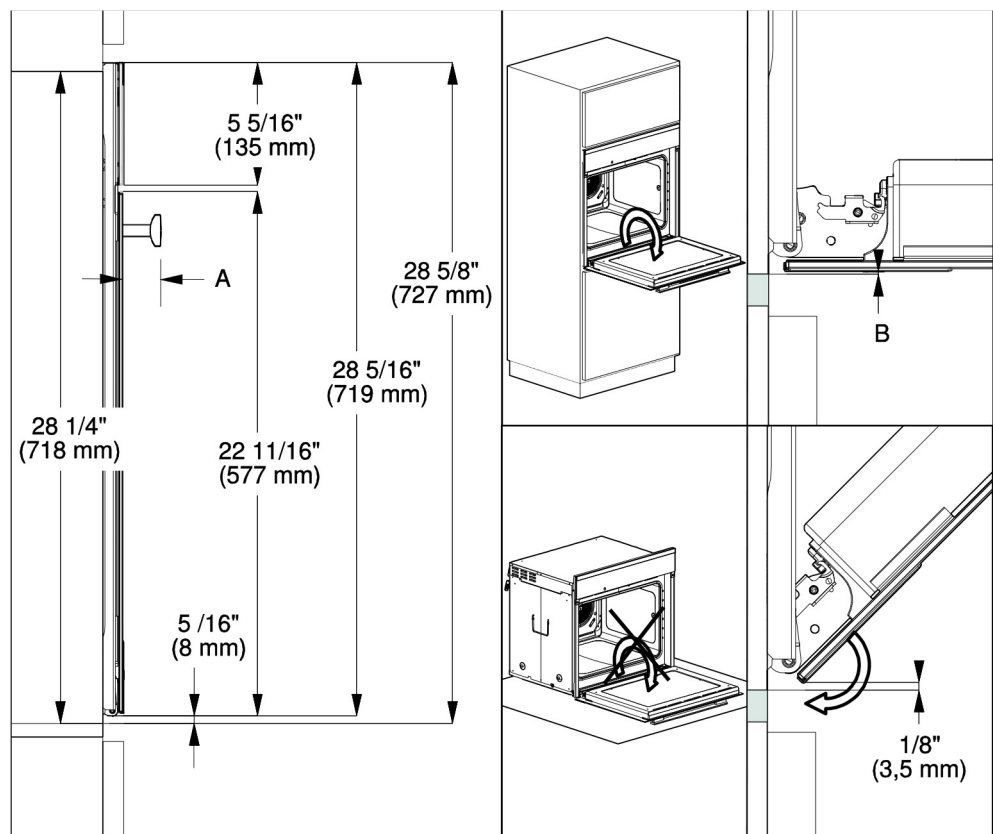


ContourLine 30" Convection Oven H 6780 BP



INSTALLATION SPECIFICATIONS

Install in Tall Niche

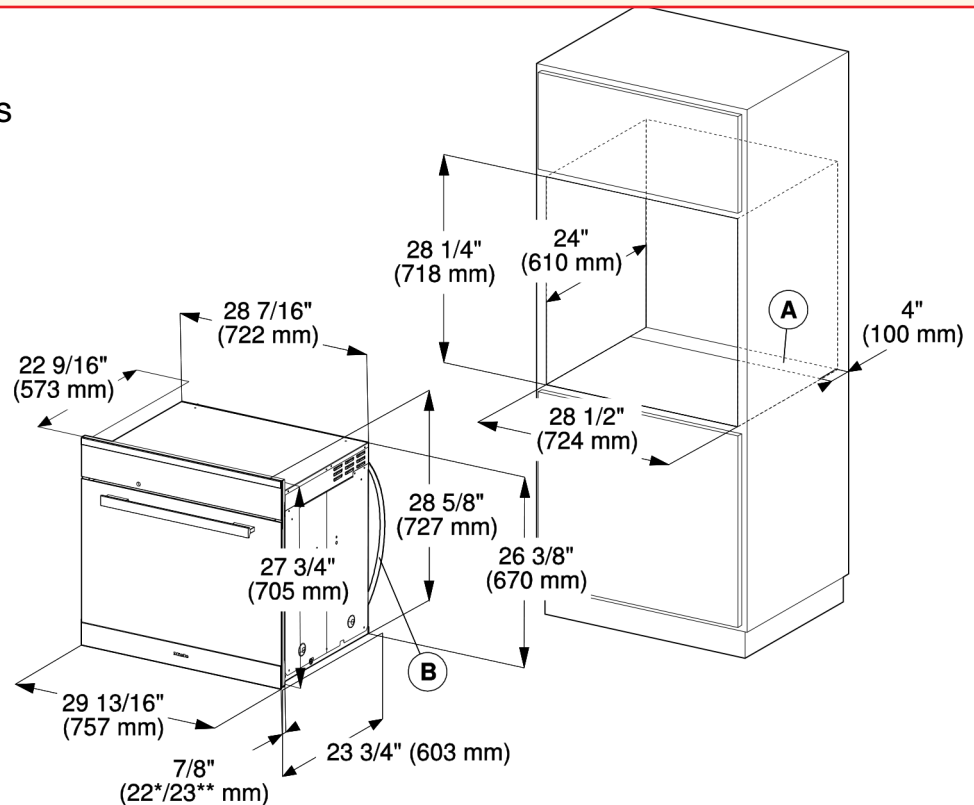


- Ⓐ Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug

* Oven with glass front
** Oven with metal front

INSTALLATION SPECIFICATIONS

Undercounter Installation

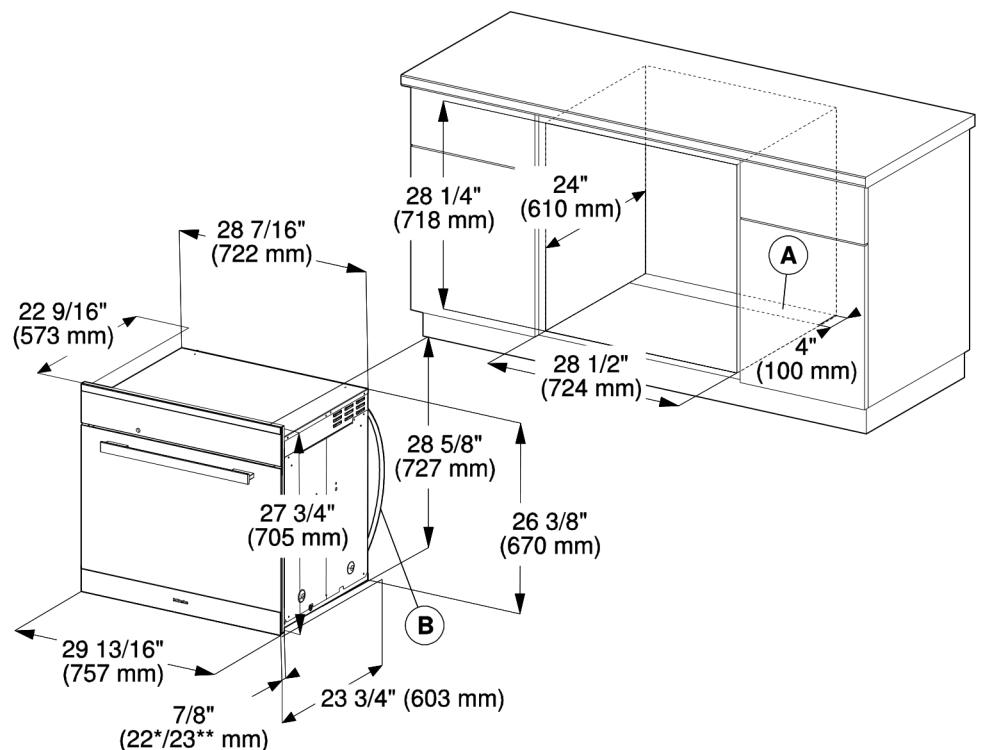


- Ⓐ Cut-out (4" x 28" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug

* Oven with glass front
** Oven with metal front

ContourLine 30" Convection Oven H 6780 BP



Undercounter Installation Front view

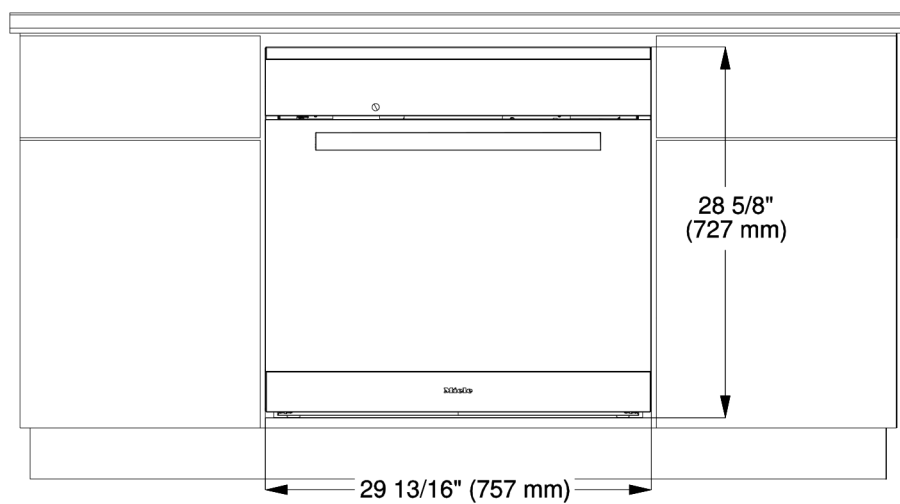


ContourLine 30" Convection Oven

H 6780 BP




HANDLE DETAILS

All Miele Signature And PureLine
Handle Dimensions

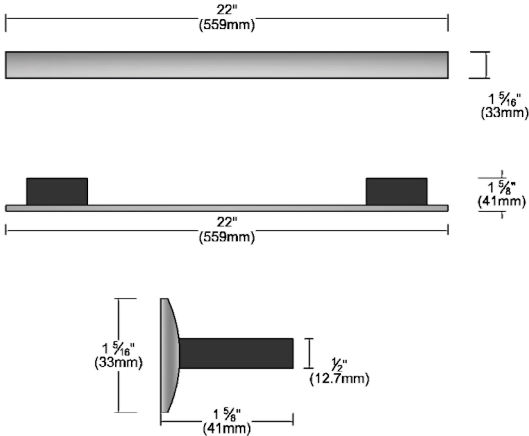

Please note hinges may require adjusting or replacing when changing from a ContourLine Handle to a Pureline or Miele Signature handle.

All ContourLine Handle
Dimensions

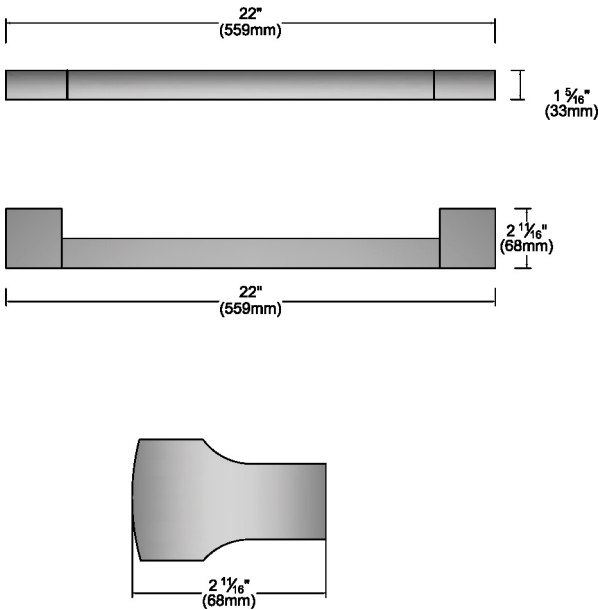

Please note hinges may require adjusting or replacing when changing from a Pureline or Miele Signature handle to a ContourLine Handle.