

Whole Bean Coffee System CVA 6405





CVA 6405 Features:

- DirectSensor controls: choose an operating mode with a single touch of one of the symbols on the left of the display. The touch component to the right of the display is used to navigate through the different levels.
- OneTouch function prepares beverage with the touch of a button
- OneTouch for Two operation dispenses two cappuccino or latté macchiato drinks, coffee or espresso simultaneously
- EasyClick Milk System simply clicks the milk reservoir into and out of place at the front of the machine
- Dishwasher-safe milk flask
- Automatic rinsing and cleaning programs
- Up to 10 user profiles
- The coffee pot function allows up to 8 cups of coffee to be brewed at one time

20/20 Link

- BrilliantLight
- Timer function
- Ground coffee chute for whole bean bypass
- Removable brew unit for easy cleaning
- Plumbed water connection


| SPECIFICATIONS | |
|--|---|
| CVA 6405 — Item 29640550USA | |
| Overall Unit Width - Excluding Fascia Dimension | 21 ⁷ / ₁₆ " (545 mm) |
| Overall Unit Height - Excluding Fascia Dimension | 17¹/₂" (445 mm) |
| Overall Unit Depth - Excluding Fascia Dimension | 18¹/₃" (460 mm) |
| Door Depth When Open | 23 ⁷ / ₁₆ " (594 mm) |
| Overall Fascia Dimensions | 237/16" (595 mm) W x 1715/16" (455.5 mm) H x 13/16" (22 mm) D |
| Built-In | |
| Minimum Cabinet Width | 22 ¹ / ₁₆ " (560 mm) |
| Minimum Cabinet Depth | 21 ⁵ /8" (550 mm) |
| Minimum Cabinet Height | 17 ¹¹ / ₁₆ " (450 mm) |
| Minimum Base Support | 62 lbs |
| Additional Cut-outs Required | Venting: 19 ¹¹ / ₁₆ " (500 mm) x 1 ⁹ / ₁₆ " (40 mm) or 31" in ² (200 cm ²) |
| Plumbing | Do not Connect to Reverse Osmosis (RO) System |
| Water Supply Requirements | Connect to a cold water supply only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 14.5 psi (1 bar) and may not exceed 145 psi (10 bar). If the pressure is higher than 145 psi (10 bar), a pressure reducing valve must be installed. |
| Water Connection Line | ³ / ₄ " BSP to ¹ / ₄ " Compression fitting is supplied. Suitable ¹ / ₄ " O.D flexible water line or copper piping is not supplied. Maximum water line length 4'11" (1.5 m). |
| Electrical | |
| Electrical Requirements | 120V, 60Hz, 15A |
| Power Cord | Molded NEMA 5-15A plug, 6 ft (1.8 m) |
| Shipping | |
| Shipping Weight | 70 lbs |
| Shipping Dimensions | 23 ⁵ / ₈ " W x 22 ¹ / ₁₆ " H x 26" L |
| Support | |
| Call Miele | 800.843.7231 |
| Miele Website | ூwww.mieleusa.com |
| | |


€2020technologies.com



PRODUCT VIEWS


Isometric View

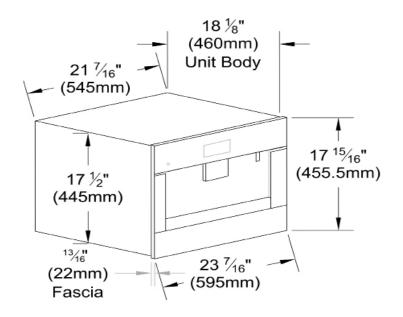

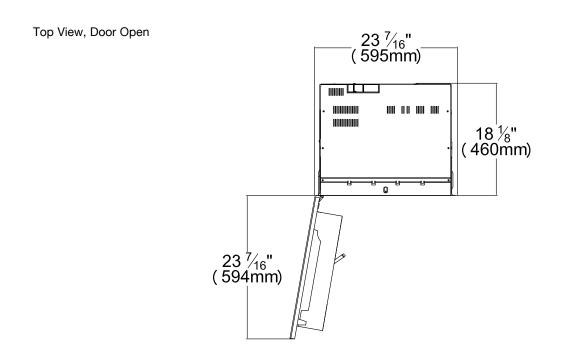


PRODUCT VIEWS

Front View

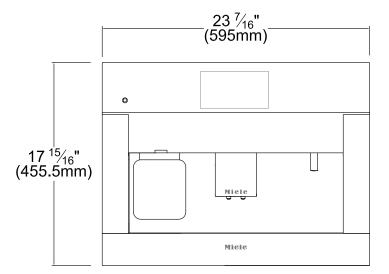

Side View

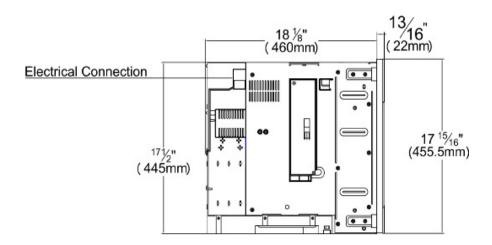







PRODUCT VIEWS

Rear View

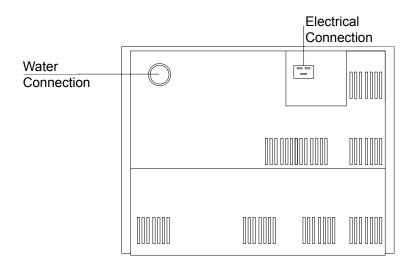




INSTALLATION SPECIFICATIONS Cutout Dimensions

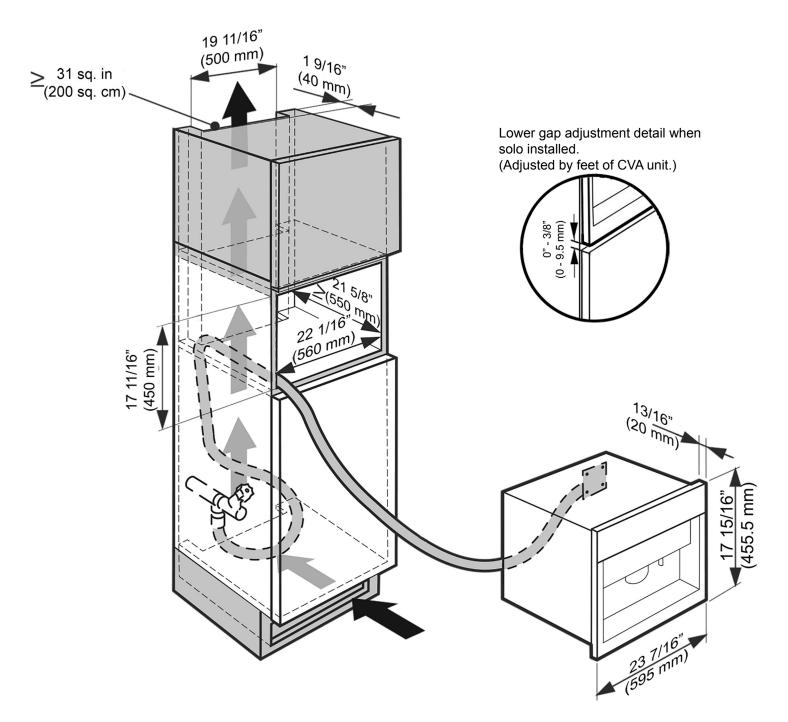


PLEASE NOTE: Condensation water can damage the coffee system or surrounding cabinets. The specified ventilation cross-sections absolutely must be observed.



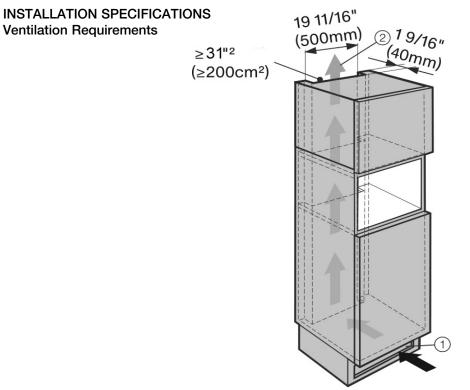

Air intake \mathbb{O} occurs via the plinth at the bottom of the appliance and the air escapes at the top \mathbb{O} at the rear of the surrounding cabinets.

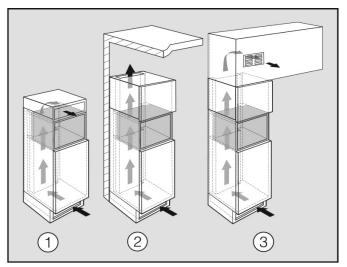


- ① directly above the coffee system with a ventilation grille (free airflow of at least 31 square inches / 200 cm2)
- 2 between the surrounding cabinets and the ceiling
- ③ through a suspended ceiling

PLEASE NOTE: Condensation water can damage the coffee system or surrounding cabinets. The specified ventilation cross-sections absolutely must be observed.



INSTALLATION SPECIFICATIONS With Warming Drawer

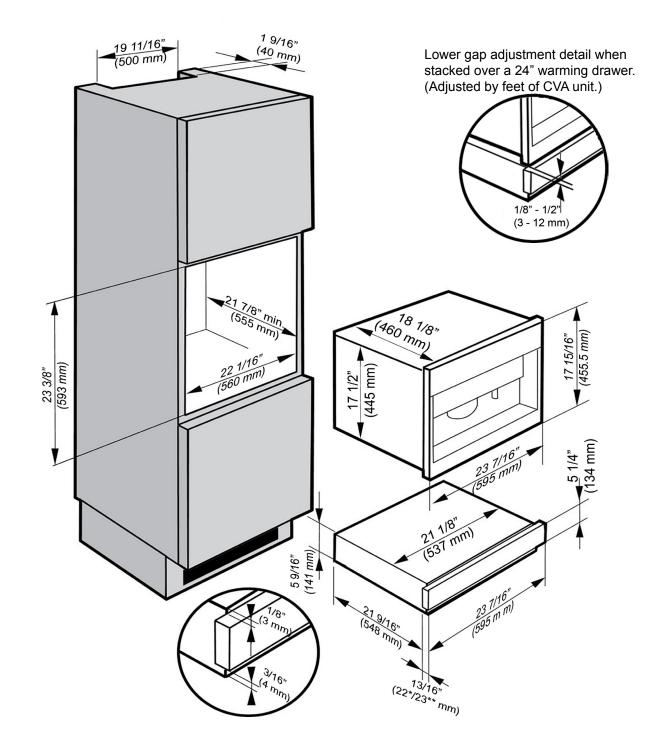

PLEASE NOTE: Condensation water can damage the coffee system or surrounding cabinets. The specified ventilation cross-sections absolutely must be observed.