

- Brass construction
- For single-hole installation
- One-piece, self-contained ceramic disc valve which allows both volume and temperature setting
- Temperature memory allows the faucet to be turned on and off at any temperature setting
- 4-3/8" (111 mm) spout reach
- Stationary spout
- Metal grid drain with metal tailpiece
- Flexible connections
- 0.5 gal/min (1.9 l/min) maximum flow rate [max at 80 psi (5.5bar)]



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
----	-----------------

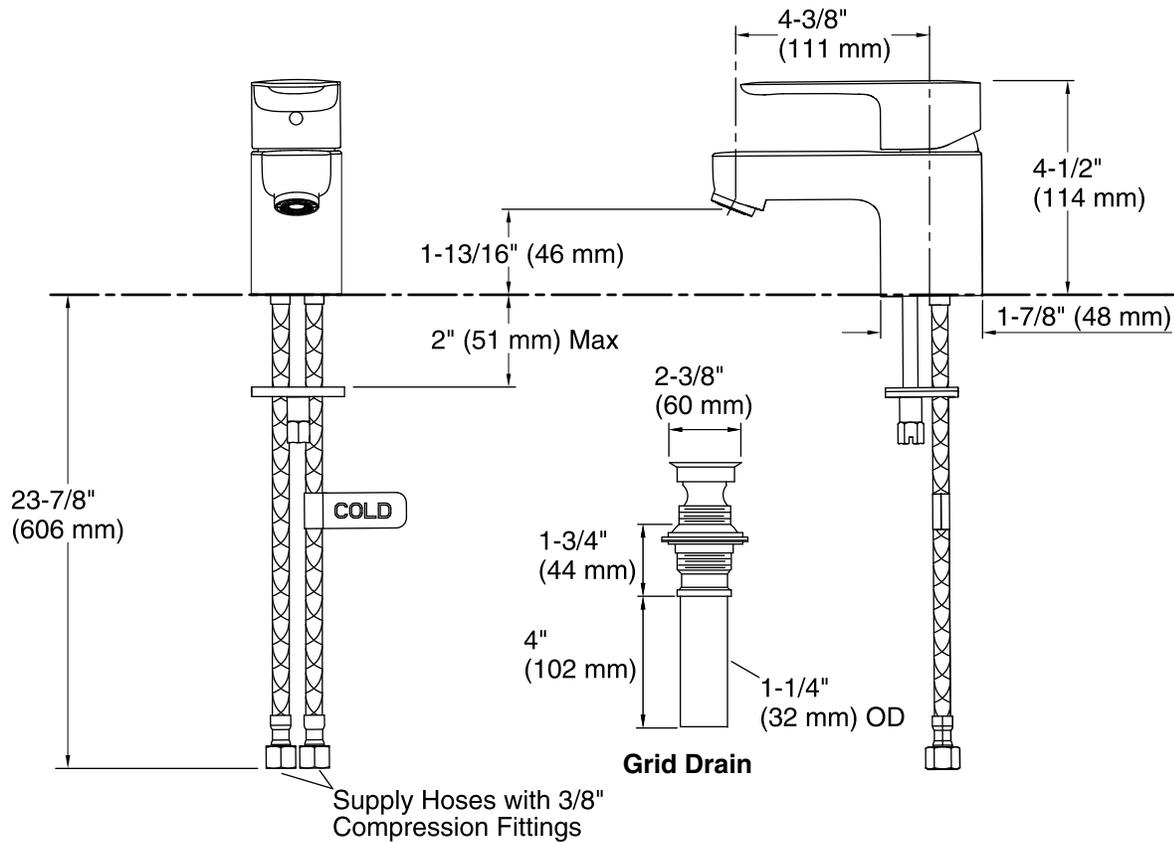

### Technical Information

All product dimensions are nominal.

Drain included: YES

Drain with overflow: YES

Drain tailpiece included: YES

included:

### Spout:

Spout reach: 4-3/8" (112 mm)

Handle clearance: 4-1/8" (105 mm)

### Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 80 psi (5.5 bar)

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.