



SUBMERSIBLE PUMPS

RESIDENTIAL & LIGHT COMMERCIAL



SUBMERSIBLE PUMPS

Model Number Nomenclature	2
4" 3200 Series Pumps	4
Ordering Information	5
5 gpm.....	6
7 gpm.....	8
10 gpm.....	10
Dimensions.....	12
4" Tri-Seal Pumps	13
Ordering Information	14
7 gpm.....	18
10 gpm.....	20
15 gpm.....	22
20 gpm.....	24
25 gpm.....	26
Dimensions.....	28
4" Series V Pumps	30
Ordering Information	31
5 gpm.....	33
7 gpm.....	35
10 gpm.....	37
15 gpm.....	39
20 gpm.....	41
25 gpm.....	43
Dimensions.....	45
4" High Capacity Pumps	46
Ordering Information	47
35 gpm.....	48
45 gpm.....	50
60 gpm.....	52
90 gpm.....	54
6" High Capacity Pumps	56
Ordering Information	57
50 gpm.....	58
75 gpm.....	60
100 gpm.....	62
125 gpm.....	64
E Series Environmental Pumps.....	66
Ordering Information	67
10 gpm Thermoplastic.....	68
20 gpm Thermoplastic.....	70
35 gpm Stainless Steel.....	72
45 gpm Stainless Steel.....	74
60 gpm Stainless Steel.....	76
90 gpm Stainless Steel.....	78
C1 Series Cistern Pumps	80
Ordering Information	81
Submersible Pump Accessories	82
References	83
Friction Loss.....	83
Pipe Fittings	86
Pressure Loss.....	87
Pressure Tank Sizing.....	89
Reference Tables.....	90
Conversions	91
2- or 3-Wire Cable, 60 Hz.....	92
Warranty Information	93

MODEL NUMBER NOMENCLATURE


PUMP AND MOTOR BRAND/SERIES CODES

FR = FPS 3200 Series
 FA = FPS Tri-Seal
 FV = FPS Series V
 FE = FPS Environmental
 FP = FPS Brand

HORSEPOWER CODES

HP	1/3	1/2	3/4	1	1.5	2	3	5	7.5	10	15	20	25	30	35	40	50	60	75	100	125	150	175	200
Code	03	05	07	1	15	2	3	5	7	10	15	20	25	30	35	40	50	60	75	100	125	150	175	200


4" 5-25 GPM SUBMERSIBLE PUMPS/MOTORS

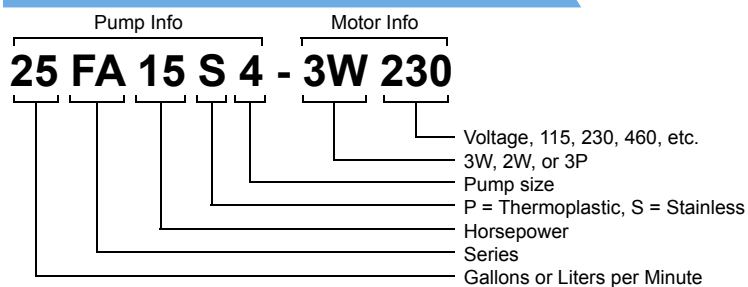

Examples:

15FA1S4-2W115 = 15 gpm, FPS 4400 Tri-Seal, Stainless Steel, 1 hp, 115 V, 2-wire Motor
 10FA15SA-3W230 = 10 gpm, FPS 4400 Tri-Seal, Stainless Steel, 1.5 hp, 230 V, 3-wire Motor

PUMP END

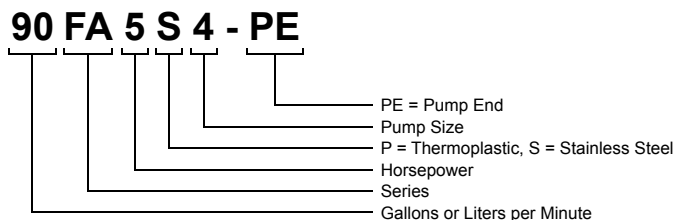

Examples:

45FA3S4-PE = 45 gpm, FPS 4400, 3 hp, Stainless Steel, Pump End
 25FE1P4-PE = 25 lpm, FPS E Series, 1 hp, Thermoplastic, Pump End

YOUR SUBMERSIBLE PUMP TEAM

Franklin's technical service hotline is made up of real people, offering real answers, in real time. Serving professional water systems distributors and contractors, our hotline boasts decades of collective industry experience. For answers to your water systems questions, contact our hotline by phone or email.

CUSTOMER RELATIONS

Please contact us at:

Toll free: 800-269-0063

Fax: 260-827-5800

Email: cleanwater@fele.com

Franklin Electric Website: www.franklinwater.com

E-Link: <http://elink.franklin-electric.com>

Distributor Self-Service: <http://customer.franklin-electric.com>

Facebook, Twitter, and YouTube: Search for "Franklin Electric"

TECHNICAL SERVICE HOTLINE

Please contact us at:

Toll free: 800-348-2420

Email: hotline@fele.com

Franklin Electric Website: www.franklinwater.com

E-Link: <http://elink.franklin-electric.com>

Facebook, Twitter, and YouTube: Search for "Franklin Electric"



EXPERIENCE SERVICE

4" 3200 SERIES PUMPS

The 3200 Series submersible pumps are designed so that all parts of the pump end, including the cable guard, fall within the diameter of Franklin Electric's industry leading submersible 4" motor. This reduced diameter pump end makes it ideal for installations where the well is considered encrusted or tight in comparison to a standard 4" well. The 3200 Series also offers a hydraulic stage design optimized for greater water and pressure output when installed at deeper well depths. For details on how to become a registered dealer and receive a 5-year warranty, contact your local distributor.

FEATURES

- Pump diameter is smaller than a standard 4" submersible for easier installation in reduced diameter 4" wells
- Hex rubber bearing and ceramic shaft sleeve allows sand and abrasives to pass through, virtually eliminating shaft wear and upper bearing failures
- Improved hydraulic performance for deeper set depths at all horsepower and flow ratings
 - Floating stage design allows for maximum efficiency while minimizing the downthrust load that is transferred to the motor
 - Advanced thermoplastic diffuser and disc with 300 Series stainless steel thrust and eye seal protection for durability and abrasion resistance
 - Scalloped impellers provide high performance to increase pressure output while reducing system losses from friction
- Removable spring-loaded check valve
- Stainless steel pump intake screen and stainless steel cable guard
- Maximum water temperature: 120 °F/49 °C
- Powered by corrosion-resistant Franklin Electric submersible 4" motor with lightning protection



UL 778
CSA 108
NSF/ANSI 372
NSF/ANSI 61 (Pump end only)

4" 3200 SERIES PUMPS - ORDERING INFORMATION

THERMOPLASTIC ORDERING INFORMATION

GPM	HP	Stages	Volts	2-Wire		3-Wire		
				Model	Order	Model	Order	Control Box
5	1/2	13	115	5WR05P4-2W115	96270505	5WR05P4-3W115	96270530	2801044915
	1/2	13	230	5WR05P4-2W230	96270510	5WR05P4-3W230	96270535	2801054915
	3/4	18	230	5WR07P4-2W230	96270515	5WR07P4-3W230	96270540	2801074915
	1	22	230	5WR1P4-2W230	96270520	5WR1P4-3W230	96270545	2801084915
7	1/2	10	115	7WR05P4-2W115	96270705	7WR05P4-3W115	96270730	2801044915
	1/2	10	230	7WR05P4-2W230	96270710	7WR05P4-3W230	96270735	2801054915
	3/4	13	230	7WR07P4-2W230	96270715	7WR07P4-3W230	96270740	2801074915
	1	18	230	7WR1P4-2W230	96270720	7WR1P4-3W230	96270745	2801084915
10	1/2	11	115	10WRD05P4-2W115	96271005	10WRD05P4-3W115	96271030	2801044915
	1/2	11	230	10WRD05P4-2W230	96271010	10WRD05P4-3W230	96271035	2801054915
	3/4	14	230	10WRD07P4-2W230	96271015	10WRD07P4-3W230	96271040	2801074915
	1	19	230	10WRD1P4-2W230	96271020	10WRD1P4-3W230	96271045	2801084915

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard on all models is 3.75".

STAINLESS STEEL ORDERING INFORMATION

GPM	HP	Stages	Volts	2-Wire		3-Wire		
				Model	Order	Model	Order	Control Box
5	1/2	13	115	5WR05S4-2W115	96370505	5WR05S4-3W115	96370530	2801044915
	1/2	13	230	5WR05S4-2W230	96370510	5WR05S4-3W230	96370535	2801054915
	3/4	18	230	5WR07S4-2W230	96370515	5WR07S4-3W230	96370540	2801074915
	1	22	230	5WR1S4-2W230	96370520	5WR1S4-3W230	96370545	2801084915
	1.5	30	230	5WR15S4-2W230	96370525	5WR15S4-3W230	96370550	2823008610
7	1/2	10	115	7WR05S4-2W115	96370705	7WR05S4-3W115	96370730	2801044915
	1/2	10	230	7WR05S4-2W230	96370710	7WR05S4-3W230	96370735	2801054915
	3/4	13	230	7WR07S4-2W230	96370715	7WR07S4-3W230	96370740	2801074915
	1	18	230	7WR1S4-2W230	96370720	7WR1S4-3W230	96370745	2801084915
	1.5	23	230	7WR15S4-2W230	96370725	7WR15S4-3W230	96370750	2823008610
10	1/2	11	115	10WRD05S4-2W115	96371005	10WRD05S4-3W115	96371030	2801044915
	1/2	11	230	10WRD05S4-2W230	96371010	10WRD05S4-3W230	96371035	2801054915
	3/4	14	230	10WRD07S4-2W230	96371015	10WRD07S4-3W230	96371040	2801074915
	1	19	230	10WRD1S4-2W230	96371020	10WRD1S4-3W230	96371045	2801084915
	1.5	24	230	10WRD15S4-2W230	96371025	10WRD15S4-3W230	96371050	2823008610

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard on all models is 3.75".

PUMP ENDS ORDERING INFORMATION

THERMOPLASTIC

GPM	HP	Stages	Model	Order
5	1/2	13	5WR05P4-PE	96280500
	3/4	18	5WR07P4-PE	96280501
	1	22	5WR1P4-PE	96280502
7	1/2	10	7WR05P4-PE	96280700
	3/4	13	7WR07P4-PE	96280701
	1	18	7WR1P4-PE	96280702
10	1/2	11	10WRD05P4-PE	96281000
	3/4	14	10WRD07P4-PE	96281001
	1	19	10WRD1P4-PE	96281002

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard on all models is 3.75".

STAINLESS STEEL


GPM	HP	Stages	Model	Order
5	1/2	13	5WR05S4-PE	96380500
	3/4	18	5WR07S4-PE	96380501
	1	22	5WR1S4-PE	96380502
	1.5	30	5WR15S4-PE	96380503
	2	38	5WR2S4-PE	96380504
7	1/2	10	7WR05S4-PE	96380700
	3/4	13	7WR07S4-PE	96380701
	1	18	7WR1S4-PE	96380702
	1.5	23	7WR15S4-PE	96380703
	2	30	7WR2S4-PE	96380704
	3	38	7WR3S4-PE	96380705
10	1/2	11	10WRD05S4-PE	96381000
	3/4	14	10WRD07S4-PE	96381001
	1	19	10WRD1S4-PE	96381002
	1.5	24	10WRD15S4-PE	96381003

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard on all models is 3.75".



4" 3200 SERIES PUMPS - 5 GPM

PERFORMANCE

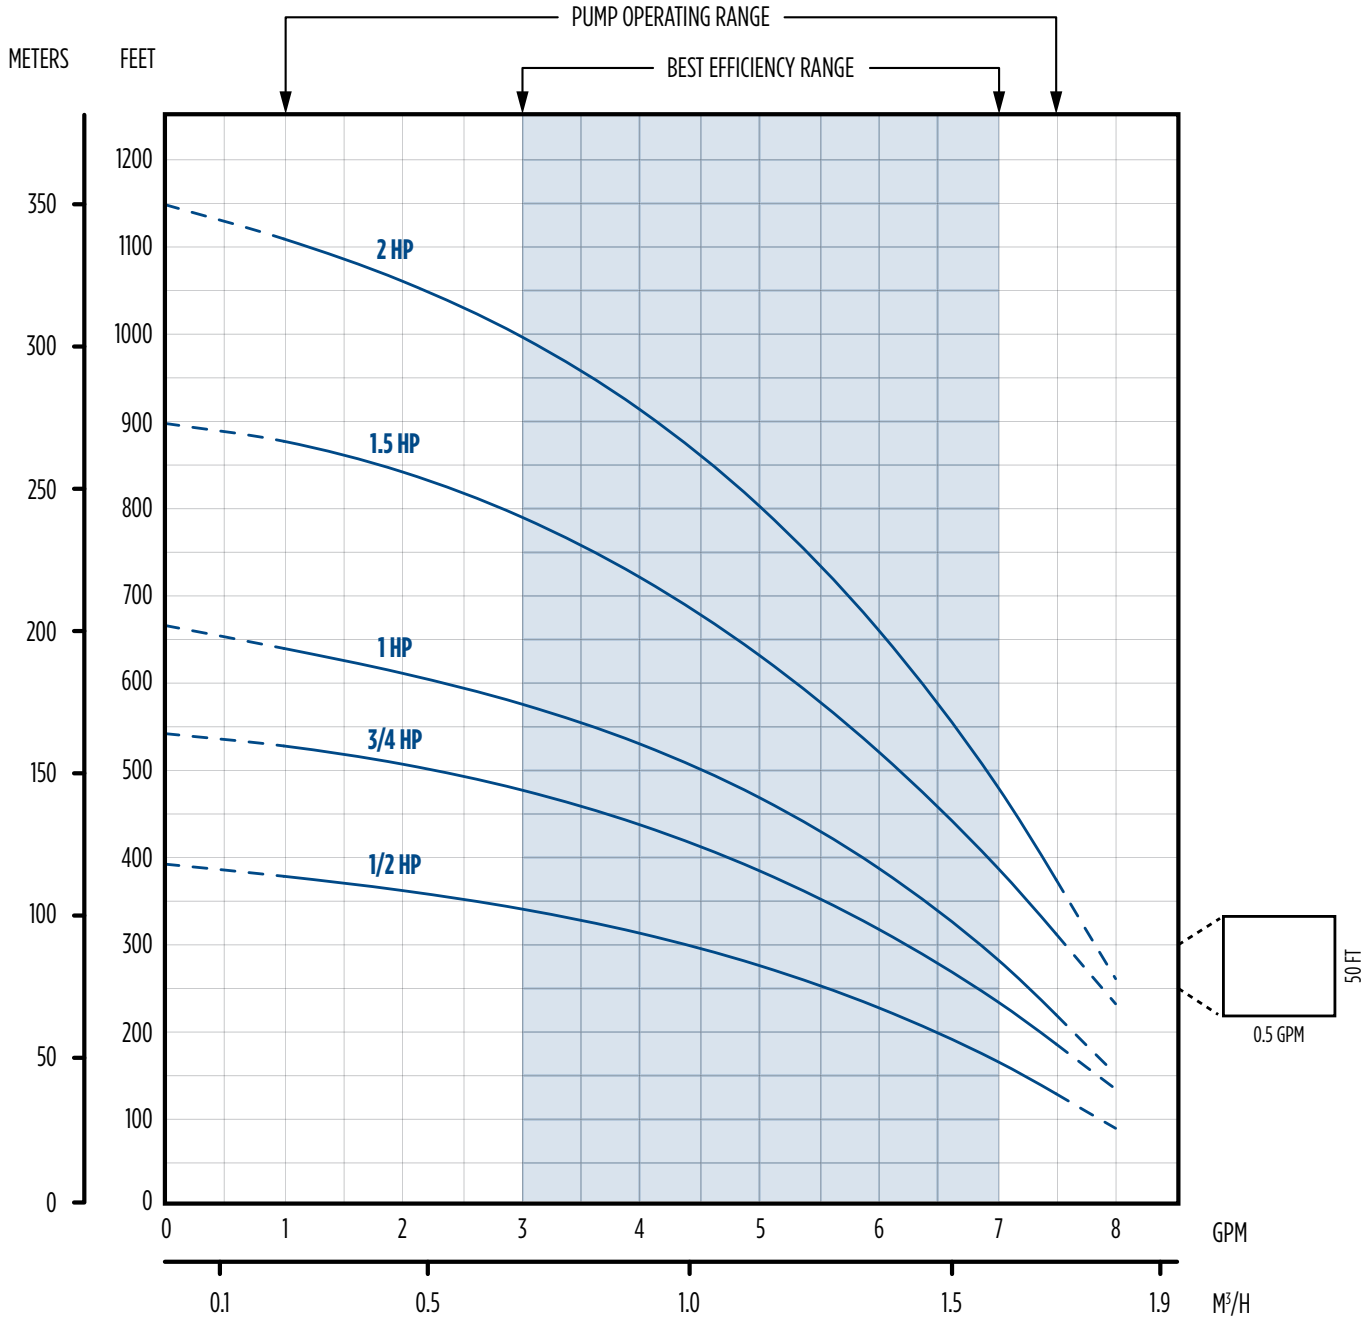

4" 3200 SERIES PUMPS - 5 GPM

PERFORMANCE


HP	PSI	Depth To Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																						Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	600	700	800	900	1000		
1/2	0				8	8	8	7	7	7	6	5	4	3									390	
	20		8	8	8	7	7	7	6	6	6	4	3											
	30	8	8	7	7	7	7	6	6	6	5	4	1											
	40	8	7	7	7	7	6	6	6	5	5	3												
	50	7	7	7	7	6	6	5	5	4	4	2												
	60	7	7	6	6	6	5	5	4	4	3													
	80	6	6	6	5	5	4	4	3	2														
Shut-off PSI		161	152	143	135	126	117	109	100	91	83	61	39	18										
3/4	0						8	8	8	8	7	7	6	6	5	4	2						541	
	20				8	8	8	7	7	7	7	6	6	5	4	2								
	30			8	8	8	7	7	7	7	7	6	5	4	3	1								
	40		8	8	8	7	7	7	7	7	6	6	5	4	3									
	50	8	8	8	7	7	7	7	7	6	6	5	4	3	2									
	60	8	8	7	7	7	7	6	6	6	6	5	4	3										
	80	7	7	7	7	6	6	6	6	5	5	4	3	1										
Shut-off PSI		226	217	209	200	191	183	174	165	157	148	126	105	83	61	39	18							
1	0							8	8	8	8	7	7	6	6	5	5	2					666	
	20					8	8	8	8	7	7	7	6	6	5	5	4	1						
	30				8	8	8	8	7	7	7	7	6	6	5	4	3							
	40			8	8	8	8	7	7	7	7	6	6	5	5	4	3							
	50		8	8	8	8	7	7	7	7	7	6	6	5	4	3	2							
	60	8	8	8	7	7	7	7	7	7	6	6	5	5	4	3	1							
	80	8	7	7	7	7	7	7	6	6	6	5	5	4	3	1								
Shut-off PSI		280	271	263	254	245	237	228	219	211	202	180	159	137	115	94	72	29						
1.5	0										8	8	8	7	7	7	6	5	4	3			899	
	20										8	8	8	7	7	7	6	6	5	4	2			
	30									8	8	8	7	7	7	6	6	6	5	3	1			
	40							8	8	8	8	7	7	7	6	6	5	4	3					
	50						8	8	8	8	7	7	7	6	6	6	5	4	3					
	60				8	8	8	8	8	8	7	7	7	6	6	5	5	4	2					
	80		8	8	8	8	8	7	7	7	7	7	6	6	5	5	4	3	1					
Shut-off PSI		381	372	364	355	346	338	329	320	312	303	281	260	238	216	195	173	130	86	43				
2	0											8	8	8	7	7	7	6	6	5	4	3	1152	
	20										8	8	8	7	7	7	7	6	5	5	4	2		
	30									8	8	8	8	7	7	7	7	6	5	4	3	2		
	40								8	8	8	8	7	7	7	7	6	6	5	4	3	1		
	50							8	8	8	8	8	7	7	7	7	6	6	5	4	3	1		
	60						8	8	8	8	8	7	7	7	7	7	6	6	5	5	4	2		
	80				8	8	8	8	8	8	7	7	7	7	6	6	6	5	4	3	2			
Shut-off PSI		491	482	473	465	456	447	439	430	421	413	391	369	348	326	304	282	239	195	152	109	66		

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



4" 3200 SERIES PUMPS - 7 GPM

PERFORMANCE

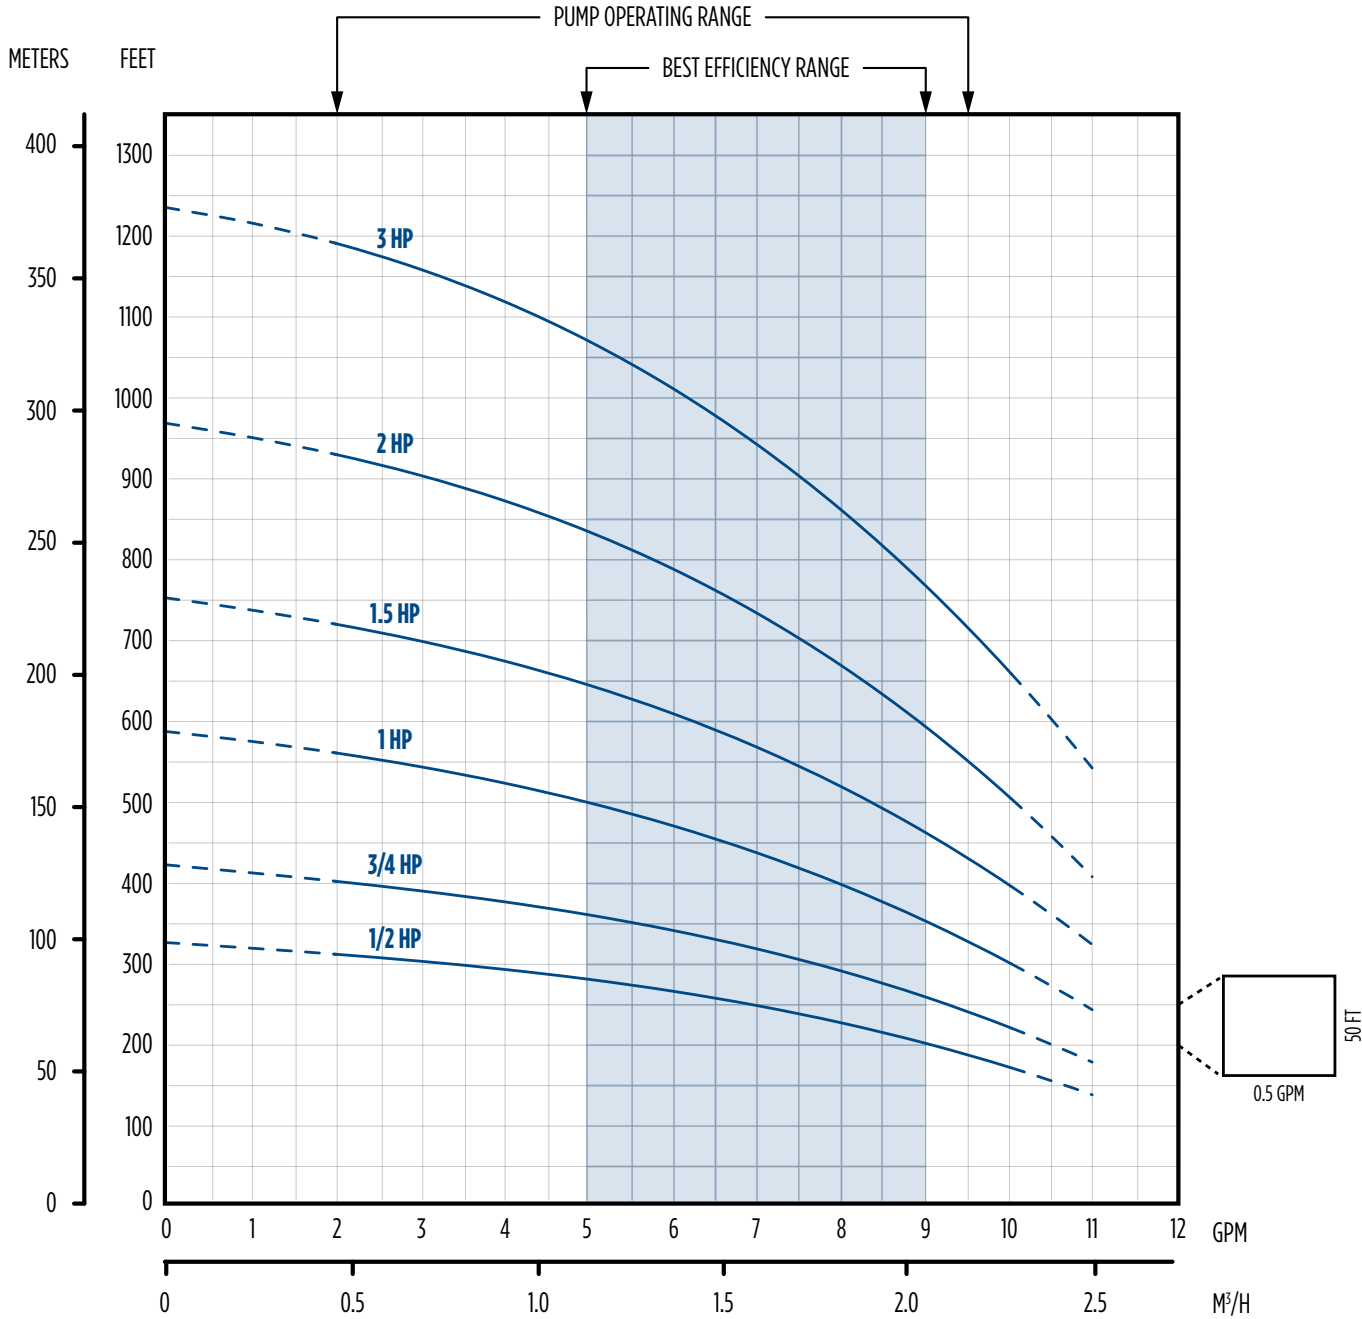

4" 3200 SERIES PUMPS - 7 GPM

PERFORMANCE

HP	PSI	Depth To Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																					
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	600	700	800	900	1000	Shut-Off (ft)
1/2	0				12	12	11	11	10	10	9	7	3										324
	20		12	12	11	11	10	9	9	8	7	4											
	30	12	12	11	11	10	9	9	8	7	6	1											
	40	12	11	11	10	9	9	8	7	5	4												
	50	11	10	10	9	8	8	7	5	4	1												
	60	10	10	9	8	7	6	5	3	1													
	80	9	8	7	6	5	3																
Shut-off PSI		132	123	115	106	97	89	80	71	63	54	32	10										
3/4	0						12	12	11	11	10	9	8	5	2								421
	20				12	12	11	11	10	10	9	8	6	2									
	30			12	12	11	11	10	10	9	9	7	4										
	40		12	11	11	11	10	10	9	9	8	6	3										
	50	12	11	11	11	10	10	9	8	8	7	5	1										
	60	11	11	10	10	10	9	8	8	7	6	3											
	80	10	10	9	9	8	7	7	6	5	3												
Shut-off PSI		174	165	156	148	139	130	122	113	104	96	74	52	31	9								
1	0								12	12	12	11	10	9	8	7	5						586
	20						12	12	11	11	11	10	9	8	7	5	3						
	30					12	12	11	11	11	11	10	9	7	6	4	1						
	40				12	12	11	11	11	10	10	9	8	7	5	3							
	50			12	12	11	11	11	10	10	10	9	8	6	5	2							
	60		12	12	11	11	11	10	10	10	9	8	7	5	3								
	80	12	11	11	11	10	10	10	9	9	8	7	6	3									
Shut-off PSI		245	237	228	219	211	202	193	185	176	167	146	124	102	81	59	37						
1.5	0									12	12	11	11	10	9	8	6	3					752
	20									12	12	11	11	10	9	8	7	5					
	30								12	12	12	11	10	10	9	8	7	4					
	40							12	12	12	11	11	10	9	8	8	6	3					
	50						12	12	12	11	11	10	10	9	8	7	6	2					
	60					12	12	11	11	11	11	10	9	9	8	7	5	1					
	80		12	12	12	11	11	11	11	10	10	9	9	8	7	5	4						
Shut-off PSI		317	309	300	291	283	274	265	257	248	139	218	196	174	153	131	109	66	23				
2	0												12	11	11	11	10	9	8	6	3		969
	20											12	12	11	11	10	10	8	7	5	1		
	30										12	12	11	11	10	10	9	8	6	4			
	40									12	12	12	11	11	10	10	9	8	6	3			
	50								12	12	12	11	11	10	10	9	9	7	5	3			
	60						12	12	12	12	11	11	10	10	10	9	8	7	5	2			
	80					12	12	12	12	11	11	10	10	9	8	8	6	4					
Shut-off PSI		411	403	394	385	376	368	359	350	342	333	312	290	268	247	225	203	160	117	73	30		

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.


HP	PSI	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	Shut-Off (ft)
3	0				12	11	11	10	9	8	6	4	2			1237
	20				12	11	10	9	8	7	5	3				
	30			12	12	11	10	9	8	7	5	3				
	40			12	11	11	10	9	8	6	5	2				
	50			12	11	10	10	9	7	6	4	1				
	60			12	11	10	9	8	7	6	4					
Shut-off PSI		493	450	406	363	319	276	233	189	146	103	59	16			

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



4" 3200 SERIES PUMPS - 10 GPM

PERFORMANCE

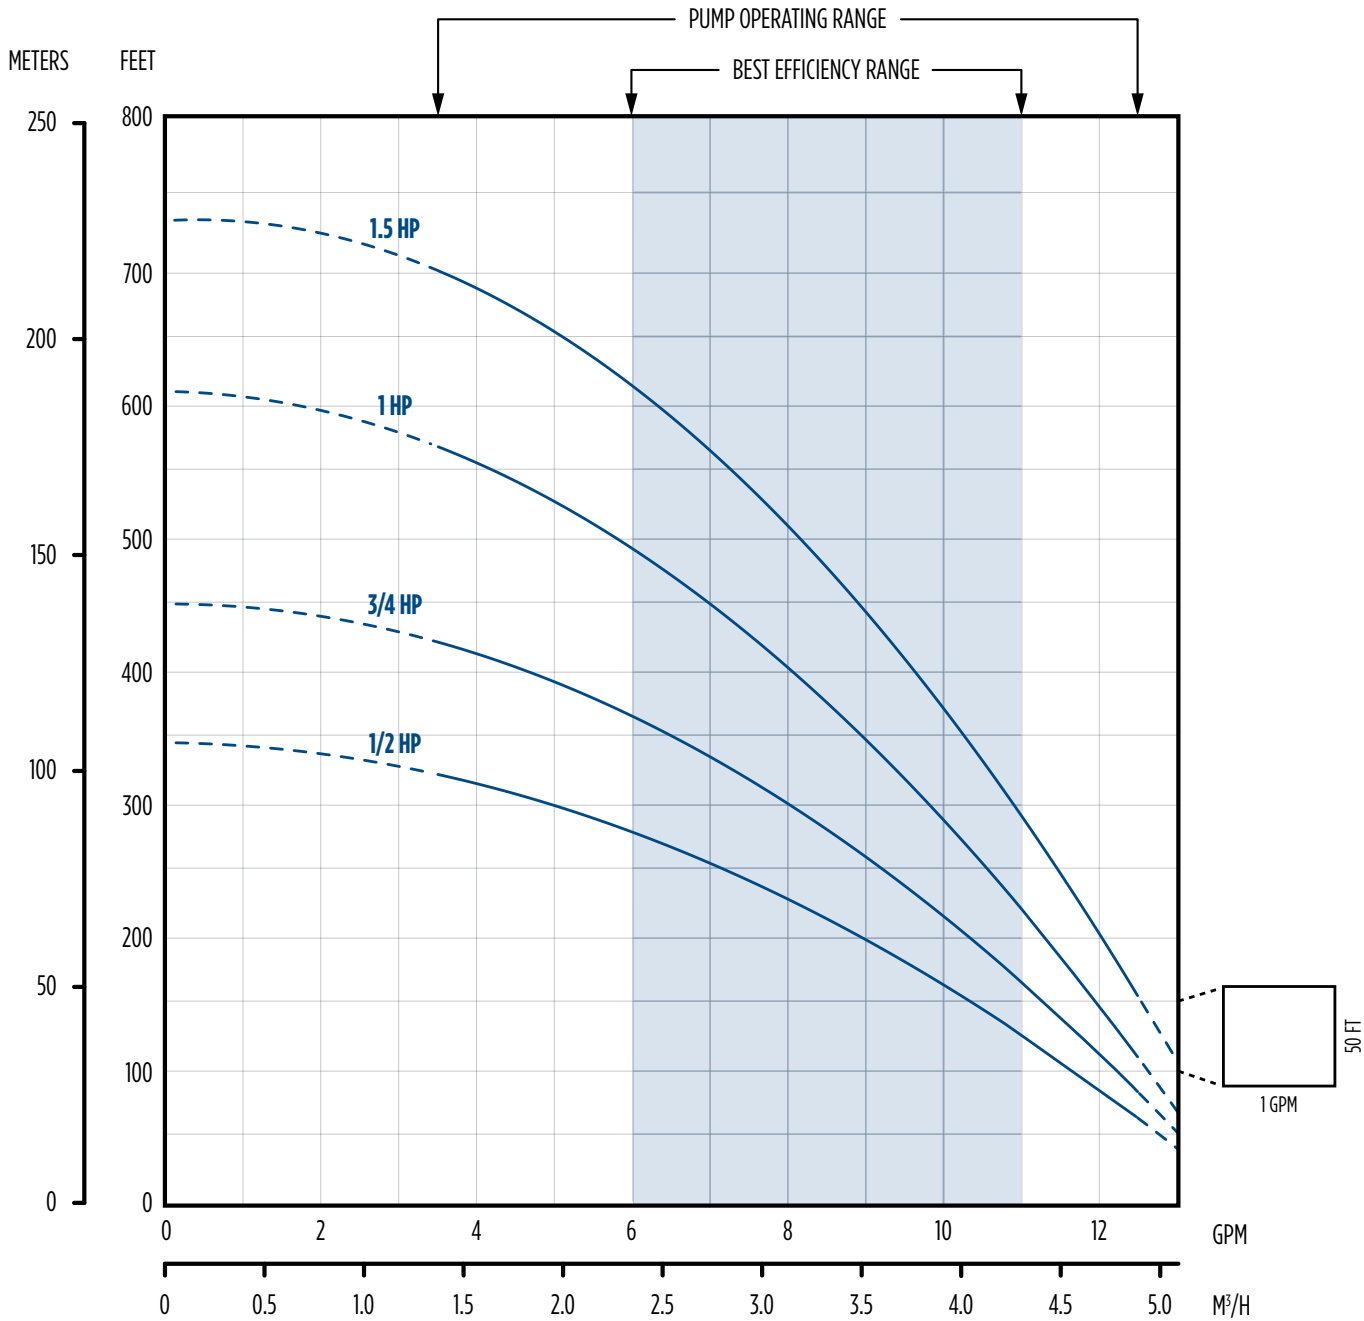

4" 3200 SERIES PUMPS - 10 GPM

PERFORMANCE

HP	PSI	Depth To Pumping Water Level, Lift, in Feet. Shaded Areas Indicate Most Efficient Performance																											
		0	20	40	60	80	100	120	140	160	180	200	240	280	320	360	400	440	480	500	550	600	650	700	750	800	Shut-Off (ft)		
1/2	0	14	13	13	13	12	12	11	11	10	10	9	8	6	4	0												353	
	10	13	13	13	12	12	11	11	10	9	9	8	7	5	1	0													
	20	13	12	12	12	11	11	10	9	9	8	7	6	3	0														
	30	12	12	11	11	10	10	9	9	8	7	6	4	0															
	40	12	11	11	10	10	9	9	8	7	6	5	3	0															
	50	11	11	10	10	9	8	8	7	6	5	4	0																
	60	11	10	10	9	8	8	7	6	5	4	2	0																
	70	10	10	9	8	8	7	6	5	4	2	0																	
	80	9	9	8	7	7	6	5	3	1	0																		
Shut-off PSI		153	144	135	127	118	110	101	92	84	75	66	49	32	14	0													
3/4	0	14	14	13	13	13	12	12	12	11	11	10	9	9	7	6	5	2	0								455		
	10	13	13	13	13	12	12	11	11	11	10	10	9	8	7	5	3	0											
	20	13	13	12	12	12	11	11	11	10	10	9	8	7	6	4	1	0											
	30	13	12	12	12	11	11	11	10	10	9	9	8	7	5	3	0												
	40	12	12	12	11	11	10	10	10	9	9	8	7	6	4	0													
	50	12	12	11	11	10	10	10	9	9	8	8	6	5	3	0													
	60	12	11	11	10	10	10	9	9	8	8	7	6	4	0														
	70	11	11	10	10	9	9	8	8	7	7	6	5	2	0														
	80	11	10	10	9	9	8	8	7	7	6	5	3	0															
Shut-off PSI		197	188	180	171	162	154	145	136	128	119	110	93	76	58	41	24	6	0										
1	0	14	14	13	13	13	13	12	12	12	12	11	11	10	9	9	8	7	6	6	4	2	0				618		
	10	14	13	13	13	13	12	12	12	12	11	11	10	10	9	8	8	7	6	5	3	0							
	20	13	13	13	13	12	12	12	12	11	11	11	10	9	9	8	7	6	5	4	2	0							
	30	13	13	13	12	12	12	11	11	11	10	10	9	8	7	7	6	4	0										
	40	13	12	12	12	12	11	11	11	11	10	10	9	9	8	7	6	5	3	2	0								
	50	12	12	12	12	11	11	11	11	10	10	10	9	8	7	6	5	4	2	0									
	60	12	12	12	11	11	11	10	10	10	10	9	8	8	7	6	5	3	0										
	70	12	12	11	11	11	10	10	10	9	9	8	7	6	5	4	2	0											
	80	12	11	11	11	10	10	10	9	9	9	8	8	7	6	4	3	0											
Shut-off PSI		268	259	250	242	233	224	216	207	198	190	181	164	146	129	112	94	77	60	51	29	8	0						
1.5	0	14	14	14	14	14	13	13	13	13	13	12	12	11	11	11	10	9	9	9	8	7	6	4	2	0	765		
	10	14	14	14	14	13	13	13	13	13	12	12	11	11	10	10	9	9	8	7	6	5	4	0					
	20	14	14	13	13	13	13	13	12	12	12	12	11	11	10	10	9	9	8	8	7	6	5	3	0				
	30	14	13	13	13	13	13	12	12	12	12	12	11	11	10	10	9	8	8	7	7	5	4	0					
	40	13	13	13	13	13	12	12	12	12	12	11	11	10	10	9	9	8	7	7	6	5	3	0					
	50	13	13	13	13	12	12	12	12	12	11	11	10	10	9	9	8	8	7	7	5	4	0						
	60	13	13	13	12	12	12	12	11	11	11	11	10	10	9	9	8	7	7	6	5	3	0						
	70	13	13	12	12	12	12	11	11	11	11	10	10	9	9	8	8	7	6	6	4	0							
	80	12	12	12	12	12	11	11	11	11	10	10	9	9	8	7	6	5	5	3	0								
Shut-off PSI		331	323	314	305	297	288	279	271	262	253	245	227	210	193	175	158	141	123	115	93	71	50	28	6	0			

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.


4" 3200 SERIES PUMPS - DIMENSIONS

THERMOPLASTIC

GPM	HP	Stages	2-Wire					3-Wire				
			Dimensions (in)			Wt. (lbs)		Dimensions (in)			Wt. (lbs)	
			A	B	C	PE	PMA	A	B	C	PE	PMA
5	1/2	13	18.4	9.5	27.9	8	27	18.4	9.5	27.9	8	27
	3/4	18	22.6	10.6	33.3	10	31	22.6	10.6	33.3	10	31
	1	22	26.0	11.7	37.7	11	35	26.0	11.7	37.7	11	35
7	1/2	10	15.9	9.5	25.4	7	26	15.9	9.5	25.4	7	26
	3/4	13	18.4	10.6	29.0	9	30	18.4	10.6	29.0	9	30
	1	18	22.6	11.7	34.3	11	35	22.6	11.7	34.3	11	35
10	1/2	11	16.7	9.5	26.2	8	27	16.7	9.5	26.2	8	27
	1/2	11	16.7	9.5	26.2	8	27	16.7	9.5	26.2	8	27
	3/4	14	19.2	10.6	29.8	10	31	19.2	10.6	29.8	10	31
	1	19	23.5	11.7	35.2	12	36	23.5	11.7	35.2	12	36

NOTES: PE = Pump end only; PMA = Pump and motor assembly; Diameter with cable guard is 3.75"

Thermoplastic




STAINLESS STEEL

GPM	HP	Stages	2-Wire					3-Wire				
			Dimensions (in)			Wt. (lbs)		Dimensions (in)			Wt. (lbs)	
			A	B	C	PE	PMA	A	B	C	PE	PMA
5	1/2	13	18.4	9.5	27.9	10	29	18.4	9.5	27.9	10	29
	3/4	18	22.6	10.6	33.3	12	33	22.6	10.6	33.3	12	33
	1	22	26.0	11.7	37.7	13	27	26.0	11.7	37.7	13	27
	1.5	30	34.1	15.1	49.2	19	50	34.1	13.6	47.7	19	50
	2	38	-	-	-	-	-	40.9	15.1	56.0	23	N/A
7	1/2	10	15.9	9.5	25.4	9	28	15.9	9.5	25.4	9	28
	3/4	13	18.4	10.6	29.0	11	32	18.4	10.6	29.0	11	32
	1	18	22.6	11.7	34.3	13	37	22.6	11.7	34.3	13	37
	1.5	23	26.8	15.1	41.9	17	48	26.8	13.6	40.4	17	48
	2	30	-	-	-	-	-	34.1	15.1	49.2	20	N/A
	3	38	-	-	-	-	-	40.9	19.04	59.9	23	N/A
10	1/2	11	16.7	9.5	26.2	10	29	16.7	9.5	26.2	10	29
	1/2	11	16.7	9.5	26.2	10	29	16.7	9.5	26.2	10	29
	3/4	14	19.2	10.6	29.8	12	33	19.2	10.6	29.8	12	33
	1	19	23.5	11.7	35.2	14	38	23.5	11.7	35.2	14	38
	1.5	24	27.7	15.1	42.8	18	49	27.7	13.6	41.3	18	49

NOTES: PE = Pump end only; PMA = Pump and motor assembly; Diameter with cable guard is 3.75"

Stainless Steel



4" TRI-SEAL PUMPS

The FPS Tri-Seal 4" submersible pump features the Tri-Seal floating stage system. This stage system further improves efficiency and protects against wear when pumping abrasives. For details on how to become a registered dealer and receive a 5-year warranty, contact your local distributor.

FEATURES

- 300 Series stainless steel hub floats with the impeller maintaining a positive seal
- Phenolic washer provides downthrust protection
- Scallop impellers provide high efficiency performance and abrasion resistance
- Advanced thermoplastic diffuser and disc - proven abrasion-resistant material
- Floating stage design allows impeller to float independently
- Removable, spring-loaded check valve
- Maximum water temperature: 120 °F/49 °C
- Ceramic shaft sleeve and rubber discharge bearing protect shaft and eliminate sand wear
- Powered by Franklin Electric corrosion-resistant super stainless 4" submersible motors with lightning protection
- Patented impeller hub seal system seals radially and axially to prevent fluid recirculation, providing high performance in the harshest conditions

Tri-Seal™ Floating Stage System

U.S. Patent No. 7,290,984



UL 778
CSA 108
NSF/ANSI 372
NSF/ANSI 61 (Pump end only)



4" TRI-SEAL PUMPS - ORDERING INFORMATION

THERMOPLASTIC ORDERING INFORMATION

GPM	HP	Stages	Volts	2-Wire			3-Wire			
				Model	Order	Motor	Model	Order	Motor	Control Box
5	1/2	8	115	5LD05P4-2W115	93700505	2445049004S	5LD05P4-3W115	93700530	2145049004S	2801044915
	1/2	8	230	5LD05P4-2W230	93700510	2445059004S	5LD05P4-3W230	93700535	2145059004S	2801054915
	3/4	12	230	5LD07P4-2W230	93700515	2445079004S	5LD07P4-3W230	93700540	2145079004S	2801074915
	1	15	230	5LD1P4-2W230	93700520	2445089003S	5LD1P4-3W230	93700545	2145089003S	2801084915
	1.5	21	230	5LD15P4-2W230	93700525	2443099004S	5LD15P4-3W230	93700550	2143099004S	2823008110
7	1/2	7	115	7LD05P4-2W115	93700705	2445049004S	7LD05P4-3W115	93700730	2145049004S	2801044915
	1/2	7	230	7LD05P4-2W230	93700710	2445059004S	7LD05P4-3W230	93700735	2145059004S	2801054915
	3/4	10	230	7LD07P4-2W230	93700715	2445079004S	7LD07P4-3W230	93700740	2145079004S	2801074915
	1	13	230	7LD1P4-2W230	93700720	2445089003S	7LD1P4-3W230	93700745	2145089003S	2801084915
	1.5	18	230	7LD15P4-2W230	93700725	2443099004S	7LD15P4-3W230	93700750	2143099004S	2823008110
10	1/2	6	115	10LD05P4-2W115	93701005	2445049004S	10LD05P4-3W115	93701030	2145049004S	2801044915
	1/2	6	230	10LD05P4-2W230	93701010	2445059004S	10LD05P4-3W230	93701035	2145059004S	2801054915
	3/4	8	230	10LD07P4-2W230	93701015	2445079004S	10LD07P4-3W230	93701040	2145079004S	2801074915
	1	11	230	10LD1P4-2W230	93701020	2445089003S	10LD1P4-3W230	93701045	2145089003S	2801084915
	1.5	15	230	10LD15P4-2W230	93701025	2443099004S	10LD15P4-3W230	93701050	2143099004S	2823008110
15	1/2	4	115	15LD05P4-2W115	93701505	2445049004S	15LD05P4-3W115	93701530	2145049004S	2801044915
	1/2	4	230	15LD05P4-2W230	93701510	2445059004S	15LD05P4-3W230	93701535	2145059004S	2801054915
	3/4	6	230	15LD07P4-2W230	93701515	2445079004S	15LD07P4-3W230	93701540	2145079004S	2801074915
	1	8	230	15LD1P4-2W230	93701520	2445089003S	15LD1P4-3W230	93701545	2145089003S	2801084915
	1.5	11	230	15LD15P4-2W230	93701525	2443099004S	15LD15P4-3W230	93701550	2143099004S	2823008110
20	3/4	5	230	20LD07P4-2W230	93702015	2445079004S	20LD07P4-3W230	93702040	2145079004S	2801074915
	1	7	230	20LD1P4-2W230	93702020	2445089003S	20LD1P4-3W230	93702045	2145089003S	2801084915
	1.5	10	230	20LD15P4-2W230	93702025	2443099004S	20LD15P4-3W230	93702050	2143099004S	2823008110
25	1	6	230	25LD1P4-2W230	93702520	2445089003S	25LD1P4-3W230	93702545	2145089003S	2801084915
	1.5	8	230	25LD15P4-2W230	93702525	2443099004S	25LD15P4-3W230	93702550	2143099004S	2823008110

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard is 3.90" on all models.

STAINLESS STEEL ORDERING INFORMATION

GPM	HP	Stages	Volts	2-Wire			3-Wire			
				Model	Order	Motor	Model	Order	Motor	Control Box
5	1/2	8	115	5LD05S4-2W115	93720505	2445049004S	5LD05S4-3W115	93720530	2145049004S	2801044915
	1/2	8	230	5LD05S4-2W230	93720510	2445059004S	5LD05S4-3W230	93720535	2145059004S	2801054915
	3/4	12	230	5LD07S4-2W230	93720515	2445079004S	5LD07S4-3W230	93720540	2145079004S	2801074915
	1	15	230	5LD1S4-2W230	93720520	2445089003S	5LD1S4-3W230	93720545	2145089003S	2801084915
	1.5	21	230	5LD15S4-2W230	93720525	2443099004S	5LD15S4-3W230	93720550	2143099004S	2823008110
7	1/2	7	115	7LD05S4-2W115	93720705	2445049004S	7LD05S4-3W115	93720730	2145049004S	2801044915
	1/2	7	230	7LD05S4-2W230	93720710	2445059004S	7LD05S4-3W230	93720735	2145059004S	2801054915
	3/4	10	230	7LD07S4-2W230	93720715	2445079004S	7LD07S4-3W230	93720740	2145079004S	2801074915
	1	13	230	7LD1S4-2W230	93720720	2445089003S	7LD1S4-3W230	93720745	2145089003S	2801084915
	1.5	18	230	7LD15S4-2W230	93720725	2443099004S	7LD15S4-3W230	93720750	2143099004S	2823008110
10	1/2	6	115	10LD05S4-2W115	93721005	2445049004S	10LD05S4-3W115	93721030	2145049004S	2801044915
	1/2	6	230	10LD05S4-2W230	93721010	2445059004S	10LD05S4-3W230	93721035	2145059004S	2801054915
	3/4	8	230	10LD07S4-2W230	93721015	2445079004S	10LD07S4-3W230	93721040	2145079004S	2801074915
	1	11	230	10LD1S4-2W230	93721020	2445089003S	10LD1S4-3W230	93721045	2145089003S	2801084915
	1.5	15	230	10LD15S4-2W230	93721025	2443099004S	10LD15S4-3W230	93721050	2143099004S	2823008110
15	1/2	4	115	15LD05S4-2W115	93721505	2445049004S	15LD05S4-3W115	93721530	2145049004S	2801044915
	1/2	4	230	15LD05S4-2W230	93721510	2445059004S	15LD05S4-3W230	93721535	2145059004S	2801054915
	3/4	6	230	15LD07S4-2W230	93721515	2445079004S	15LD07S4-3W230	93721540	2145079004S	2801074915
	1	8	230	15LD1S4-2W230	93721520	2445089003S	15LD1S4-3W230	93721545	2145089003S	2801084915
	1.5	11	230	15LD15S4-2W230	93721525	2443099004S	15LD15S4-3W230	93721550	2143099004S	2823008110
20	3/4	5	230	20LD07S4-2W230	93722015	2445079004S	20LD07S4-3W230	93722040	2145079004S	2801074915
	1	7	230	20LD1S4-2W230	93722020	2445089003S	20LD1S4-3W230	93722045	2145089003S	2801084915
	1.5	10	230	20LD15S4-2W230	93722025	2443099004S	20LD15S4-3W230	93722050	2143099004S	2823008110
25	1	6	230	25LD1S4-2W230	93722520	2445089003S	25LD1S4-3W230	93722545	2145089003S	2801084915
	1.5	8	230	25LD15S4-2W230	93722525	2443099004S	25LD15S4-3W230	93722550	2143099004S	2823008110

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard is 3.90" on all models.

4" TRI-SEAL PUMPS - ORDERING INFORMATION

PUMP ENDS ORDERING INFORMATION

THERMOPLASTIC

GPM	HP	Stages	Model	Order
5	1/2	8	5LD05P4-PE	93710505
	3/4	12	5LD07P4-PE	93710510
	1	15	5LD1P4-PE	93710515
	1.5	21	5LD15P4-PE	93710520
7	1/2	7	7LD05P4-PE	93710705
	3/4	10	7LD07P4-PE	93710710
	1	13	7LD1P4-PE	93710715
	1.5	18	7LD15P4-PE	93710720
10	1/2	6	10LD05P4-PE	93711005
	3/4	8	10LD07P4-PE	93711010
	1	11	10LD1P4-PE	93711015
	1.5	15	10LD15P4-PE	93711020
15	1/2	4	15LD05P4-PE	93711505
	3/4	6	15LD07P4-PE	93711510
	1	8	15LD1P4-PE	93711515
	1.5	11	15LD15P4-PE	93711520
20	3/4	5	20LD07P4-PE	93712010
	1	7	20LD1P4-PE	93712015
	1.5	10	20LD15P4-PE	93712020
25	1	6	25LD1P4-PE	93712515
	1.5	8	25LD15P4-PE	93712520

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard is 3.90" on all models.

STAINLESS STEEL


GPM	HP	Stages	Model	Order
5	1/2	8	5LD05S4-PE	93730505
	3/4	12	5LD07S4-PE	93730510
	1	15	5LD1S4-PE	93730515
	1.5	21	5LD15S4-PE	93730520
	2	26	5LD2S4-PE	93730525
7	1/2	7	7LD05S4-PE	93730705
	3/4	10	7LD07S4-PE	93730710
	1	13	7LD1S4-PE	93730715
	1.5	18	7LD15S4-PE	93730720
	2	24	7LD2S4-PE	93730725
	3	32	7LD3S4-PE	93730730
10	1/2	6	10LD05S4-PE	93731005
	3/4	8	10LD07S4-PE	93731010
	1	11	10LD1S4-PE	93731015
	1.5	15	10LD15S4-PE	93731020
	2	18	10LD2S4-PE	93731025
	3	24	10LD3S4-PE	93731030
	5	39	10LD5S4-PE	93731035
	1/2	4	15LD05S4-PE	93731505
15	3/4	6	15LD07S4-PE	93731510
	1	8	15LD1S4-PE	93731515
	1.5	11	15LD15S4-PE	93731520
	2	14	15LD2S4-PE	93731525
	3	19	15LD3S4-PE	93731530
	5	31	15LD5S4-PE	93731535
	3/4	5	20LD07S4-PE	93732010
	1	7	20LD1S4-PE	93732015
20	1.5	10	20LD15S4-PE	93732020
	2	12	20LD2S4-PE	93732025
	3	16	20LD3S4-PE	93732030
	5	26	20LD5S4-PE	93732035
	7.5	39	20LD7S4-PE	93732040
	10	52	20LD10S4-PE	93732045
	1	6	25LD1S4-PE	93732515
25	1.5	8	25LD15S4-PE	93732520
	2	10	25LD2S4-PE	93732525
	3	14	25LD3S4-PE	93732530
	5	23	25LD5S4-PE	93732535
	7.5	35	25LD7S4-PE	93732540
	10	44	25LD10S4-PE	93732545

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard is 3.90" on all models.



4" TRI-SEAL PUMPS - 5 GPM

PERFORMANCE

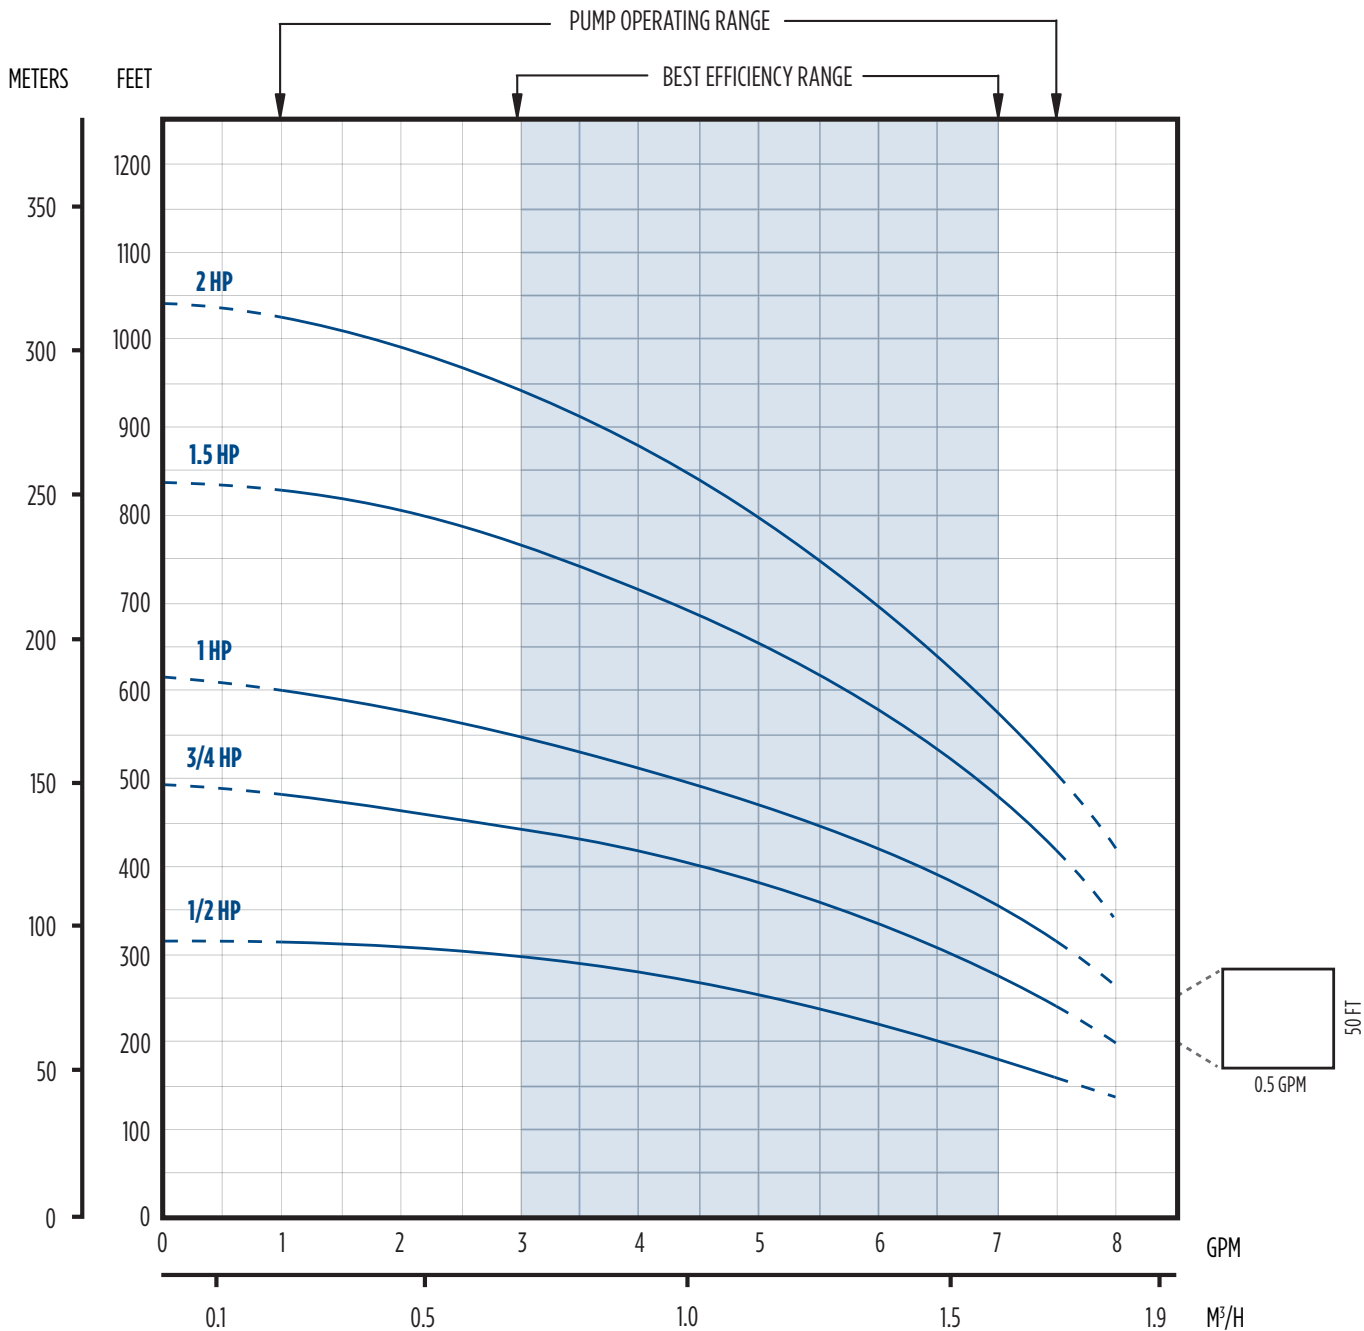

4" TRI-SEAL PUMPS - 5 GPM

PERFORMANCE


HP	PSI	Depth To Pumping Water Level (L) in Feet. Shaded Areas Indicate Most Efficient Performance																									
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	Shut-Off (ft)		
1/2	0							7	7	6	6	5	4													315	
	20					8	7	6	6	5	5	3	2														
	30				7	7	6	6	5	5	4	2															
	40			7	7	6	6	5	5	4	3																
	50		7	6	6	6	5	5	4	2																	
	60	7	7	6	6	5	4	4	2																		
	80	6	6	5	4	3																					
Shut-off PSI		127	119	110	101	93	84	75	67	58	49	32	23														
3/4	0										7	7	7	6	5	4	3									5495	
	20								7	7	7	6	6	5	4	3											
	30							7	7	7	6	6	6	5	3												
	40						7	7	7	6	6	5	4	2													
	50					7	7	7	6	6	6	5	5	4													
	60				7	7	7	6	6	6	5	5	4	3													
	80		7	7	7	6	6	5	5	4	3	3															
Shut-off PSI		205	196	188	179	171	162	153	145	136	127	110	101	84	58	41	23										
1	0												8	7	6	6	5	4	4							615	
	20											7	7	7	6	5	4	3									
	30									7	7	7	7	6	5	5	3	2									
	40									7	7	7	7	6	5	4	3										
	50								7	7	7	7	6	6	4	3											
	60							7	7	7	7	6	6	5	4												
	80						7	7	7	6	5	5	4														
Shut-off PSI		257	248	240	231	222	214	205	197	188	179	162	153	136	110	93	75	58	49								
1.5	0														7	7	7	6	5	4	2					835	
	20													7	7	7	6	6	6	5	3						
	30													7	7	7	6	6	6	6	4	3					
	40												7	7	7	6	6	5	4	2							
	50											7	7	7	7	6	6	5	5	3							
	60											7	7	7	6	6	5	5	4	3							
	80									7	7	7	7	6	5	5	4	4	2								
Shut-off PSI		352	344	335	326	318	309	300	292	283	274	257	249	231	205	188	171	153	145	101	58	15					
2	0															7	7	7	6	5	4	3				1040	
	20															7	7	7	6	5	4	2					
	30															7	7	7	6	6	5	3					
	40															7	7	7	6	6	5	3					
	50														7	7	7	6	6	5	4	3					
	60														7	7	7	6	6	5	4	3					
	80											7	7	7	6	6	6	5	3								
Shut-off PSI		441	432	424	415	406	398	389	381	372	363	346	337	320	294	277	259	242	233	190	147	104	60				

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



4" TRI-SEAL PUMPS - 7 GPM

PERFORMANCE

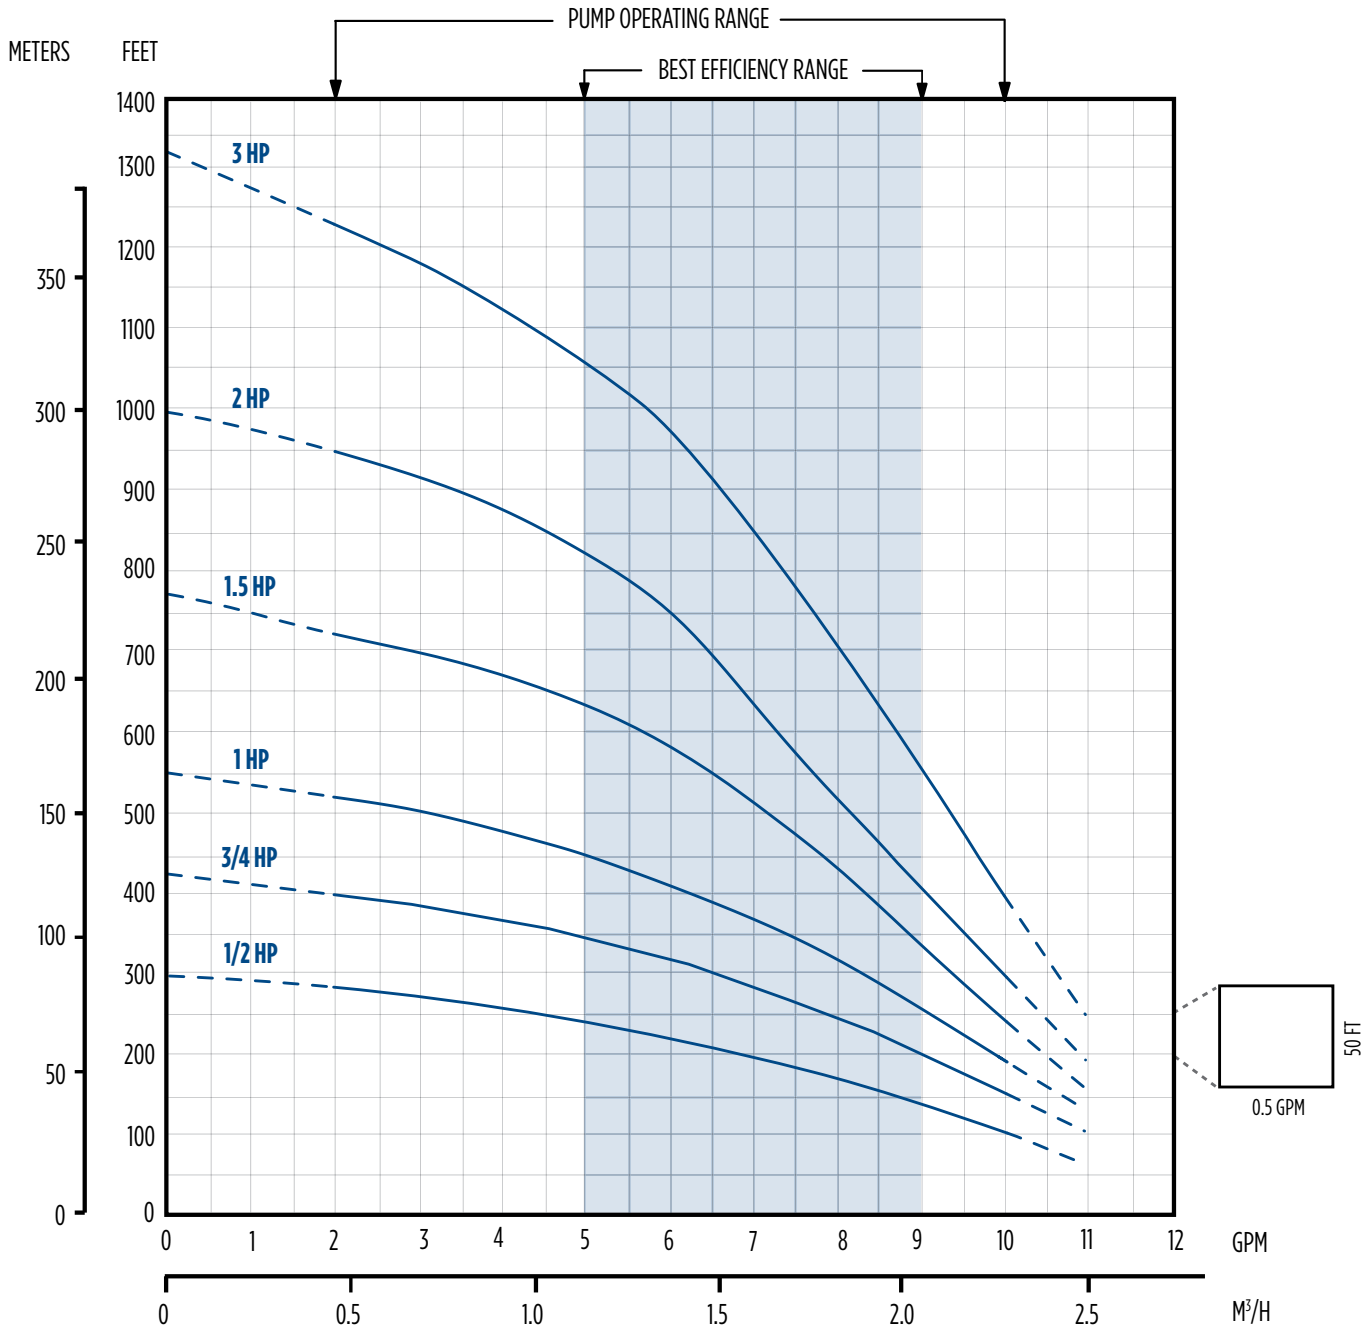

4" TRI-SEAL PUMPS - 7 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level, or Lift, in Feet. Shaded Areas Indicate Most Efficient Performance																								
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	Shut-Off (ft)	
1/2	0				10	10	9	9	8	7	6	5	4												300	
	20		10	9	9	8	8	7	6	5	4															
	30	10	9	9	8	7	7	6	5	4	3															
	40	9	9	8	8	7	6	5	4	3																
	50	9	8	7	7	6	5	4	3																	
	60	8	7	6	6	5	4	3																		
	80	6	5	4	3																					
Shut-off PSI		121	112	103	95	86	77	69	60	52	43	26	17													
3/4	0						10	10	9	9	9	8	7	6	4										422	
	20			10	10	10	9	9	8	8	7	6	6	4												
	30		10	10	10	9	9	8	8	7	7	6	5	3												
	40	10	10	10	9	9	8	8	7	7	6	5	4													
	50	10	9	9	9	8	8	7	7	6	6	4	3													
	60	9	9	9	8	8	7	7	6	6	5	3														
	80	8	8	8	7	6	6	5	5	4	3															
Shut-off PSI		174	165	156	148	139	130	122	113	104	96	78	70	52	26											
1	0							10	10	10	9	9	8	8	7	6	5	3	3						544	
	20					10	10	10	9	9	9	8	8	7	6	5	3									
	30			10	10	10	10	9	9	9	8	8	7	6	5	4										
	40		10	10	10	10	9	9	9	8	8	7	7	6	4	3										
	50	10	10	10	10	9	9	9	8	8	8	7	6	5	3											
	60	10	10	9	9	9	8	8	8	8	7	6	6	5	3											
	80	9	9	9	8	8	8	7	7	7	6	5	5	3												
Shut-off PSI		226	218	209	200	192	183	174	166	157	148	131	123	105	79	62	45	27	18							
1.5	0								10	10	10	9	9	9	8	8	7	7	7	5	2				765	
	20						10	10	10	10	9	9	9	8	8	7	7	6	6	4						
	30				10	10	10	10	10	9	9	9	9	8	8	7	7	6	6	3						
	40			10	10	10	10	9	9	9	9	8	8	7	7	6	6	5	3							
	50		10	10	10	10	9	9	9	9	9	8	8	8	7	6	6	5	5							
	60	10	10	10	10	9	9	9	9	9	8	8	8	7	7	6	6	5	4							
	80	10	10	9	9	9	9	9	8	8	8	8	7	7	6	5	5	4	3							
Shut-off PSI		322	313	305	296	287	279	270	261	253	244	227	218	201	175	158	140	123	114	71	28					
2	0									10	10	10	10	9	9	9	8	8	8	7	6	5	3		995	
	20							10	10	10	10	10	9	9	9	8	8	7	7	6	6	4				
	30						10	10	10	10	10	10	9	9	9	8	8	7	7	7	6	5	4			
	40					10	10	10	10	10	9	9	9	9	8	8	7	7	7	6	5	3				
	50				10	10	10	10	10	10	9	9	9	9	8	8	8	7	7	7	6	5	3			
	60			10	10	10	10	10	10	9	9	9	9	9	8	8	7	7	7	7	6	4				
	80	10	10	10	10	10	9	9	9	9	9	9	8	8	7	7	7	6	6	5	3					
Shut-off PSI		421	412	404	395	386	378	369	360	352	343	326	317	300	274	257	239	222	213	170	127	84	40			

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.


HP	PSI	Depth to Pumping Water Level, or Lift, in Feet. Shaded Areas Indicate Most Efficient Performance														Shut-Off (ft)
		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	
3	0			10	9	9	8	7	7	6	5	4	2			1310
	20		10	9	9	8	8	7	6	6	5	3				
	30		10	9	9	8	8	7	6	6	4	3				
	40		10	9	9	8	7	7	6	5	4					
	50	10	10	9	8	8	7	7	6	5	4					
	60	10	10	9	8	8	7	7	6	5	3					
	80	10	9	8	8	7	7	6	5	4	2					
Shut-off PSI		523	480	437	394	350	307	264	221	177	134	91	48			

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



4" TRI-SEAL PUMPS - 10 GPM

PERFORMANCE

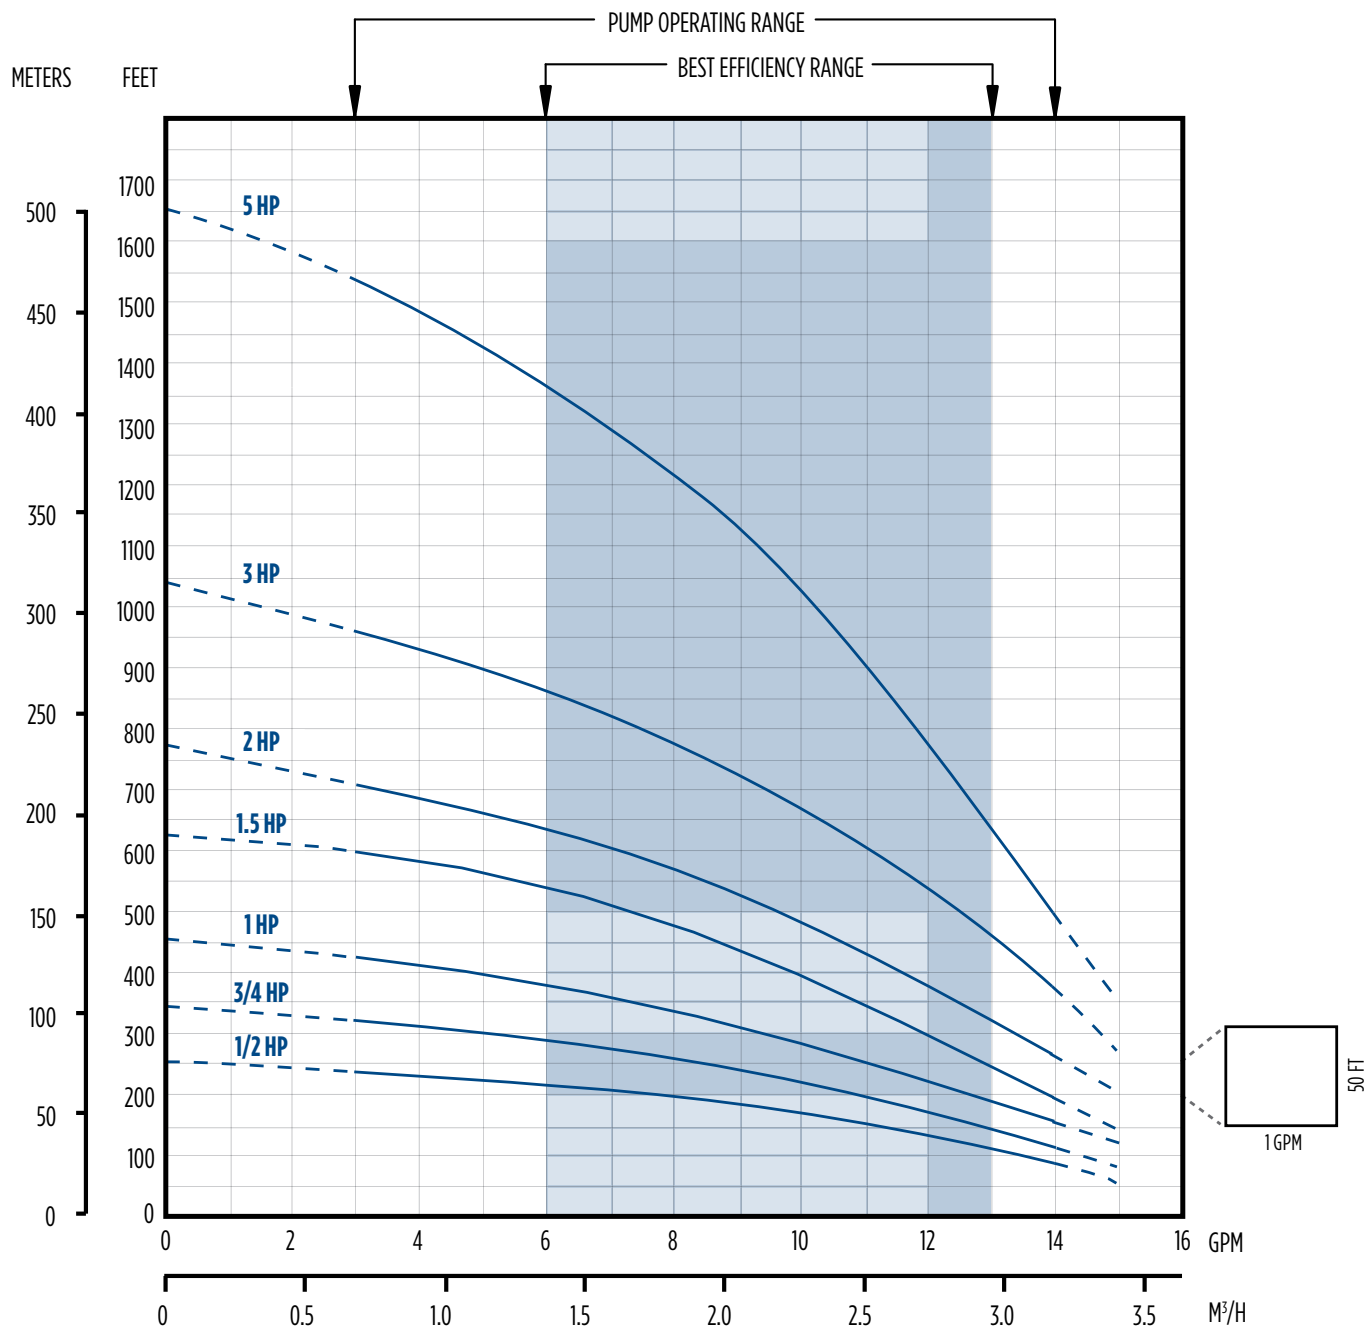

4" TRI-SEAL PUMPS - 10 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																							Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	
1/2	0				14	13	12	11	10	9	7														244
	20	14	13	13	12	11	10	8	6	3															
	30	13	13	12	11	10	8	6	3																
	40	13	12	11	10	8	6	3																	
	50	12	11	9	8	5	3																		
	60	11	10	7	4																				
Shut-off PSI		97	88	80	71	62	54	45	36	28	19														
3/4	0					14	13	13	12	11	10	7	8	4											338
	20		14	14	13	12	12	11	10	9	8	6	4												
	30	14	14	13	12	12	11	10	9	8	7	3													
	40	14	13	12	12	11	10	9	8	7	6														
	50	13	12	11	11	10	9	8	7	5	3														
	60	12	11	11	10	9	8	6	5																
Shut-off PSI		137	129	120	111	103	94	85	77	68	59	42	34	16											
1	0							14	13	13	12	11	10	9	7	4									444
	20					14	13	13	12	11	11	9	9	7	3										
	30					14	13	13	12	11	11	10	9	8	6										
	40				14	13	13	12	11	11	10	9	8	7	5										
	50		14	13	12	12	11	11	10	9	8	7	6												
	60	13	12	12	11	11	10	10	9	8	8	5	4												
Shut-off PSI		183	174	157	148	140	131	123	114	105	97	79	71	53	27	10									
1.5	0								14	13	13	12	12	11	11	9	8	7	6	5					615
	20							14	13	13	12	12	11	11	10	8	8	6	5	4					
	30						14	13	13	12	12	11	11	10	8	8	6	5	4						
	40					14	13	13	12	12	12	11	10	10	8	7	6	4							
	50				14	13	13	12	12	11	11	10	10	9	8	6	5	3							
	60		14	13	13	13	12	12	11	11	11	10	9	9	7	6	4								
Shut-off PSI		257	248	240	231	222	214	205	197	188	179	162	153	136	110	93	75	41	32						
2	0											14	13	13	12	11	10	10	9	6					770
	20										14	13	13	12	11	10	9	9	8	5					
	30									14	13	13	12	12	10	10	9	8	8	4					
	40								14	13	13	12	12	11	10	9	9	8	7	3					
	50							14	13	13	12	12	11	11	10	9	8	7	6						
	60				14	13	13	12	12	11	11	10	9	8	7	6	5								
Shut-off PSI		324	316	307	298	290	281	272	264	255	246	229	220	203	177	160	143	125	117	73					
3	0														14	13	13	12	12	11	9	7	5		1034
	20													14	13	13	12	12	12	10	8	6	3		
	30												14	14	13	13	12	12	11	11	9	7	4		
	40											14	14	14	13	12	12	11	11	11	9	7	4		
	50										14	14	14	13	12	12	11	11	11	10	9	6	3		
	60								14	14	13	13	12	12	11	11	10	10	8	5					
Shut-off PSI		438	430	421	413	404	395	387	378	369	361	343	335	317	291	274	257	240	231	188	144	101	58		

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.


HP	PSI	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	
5	0				14	13	13	12	11	11	10	9	8	6	5	1310
	20				14	13	12	12	11	10	9	8	7	6	4	
	30				14	13	12	12	11	10	9	8	7	5	4	
	40				14	13	12	11	11	10	9	8	7	5	3	
	50				14	13	13	12	11	10	9	7	6	5	3	
	60				14	13	13	12	11	10	9	8	7	6	4	
Shut-off PSI		670	626	583	540	497	453	410	367	324	280	237	194	151	107	

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



4" TRI-SEAL PUMPS - 15 GPM

PERFORMANCE

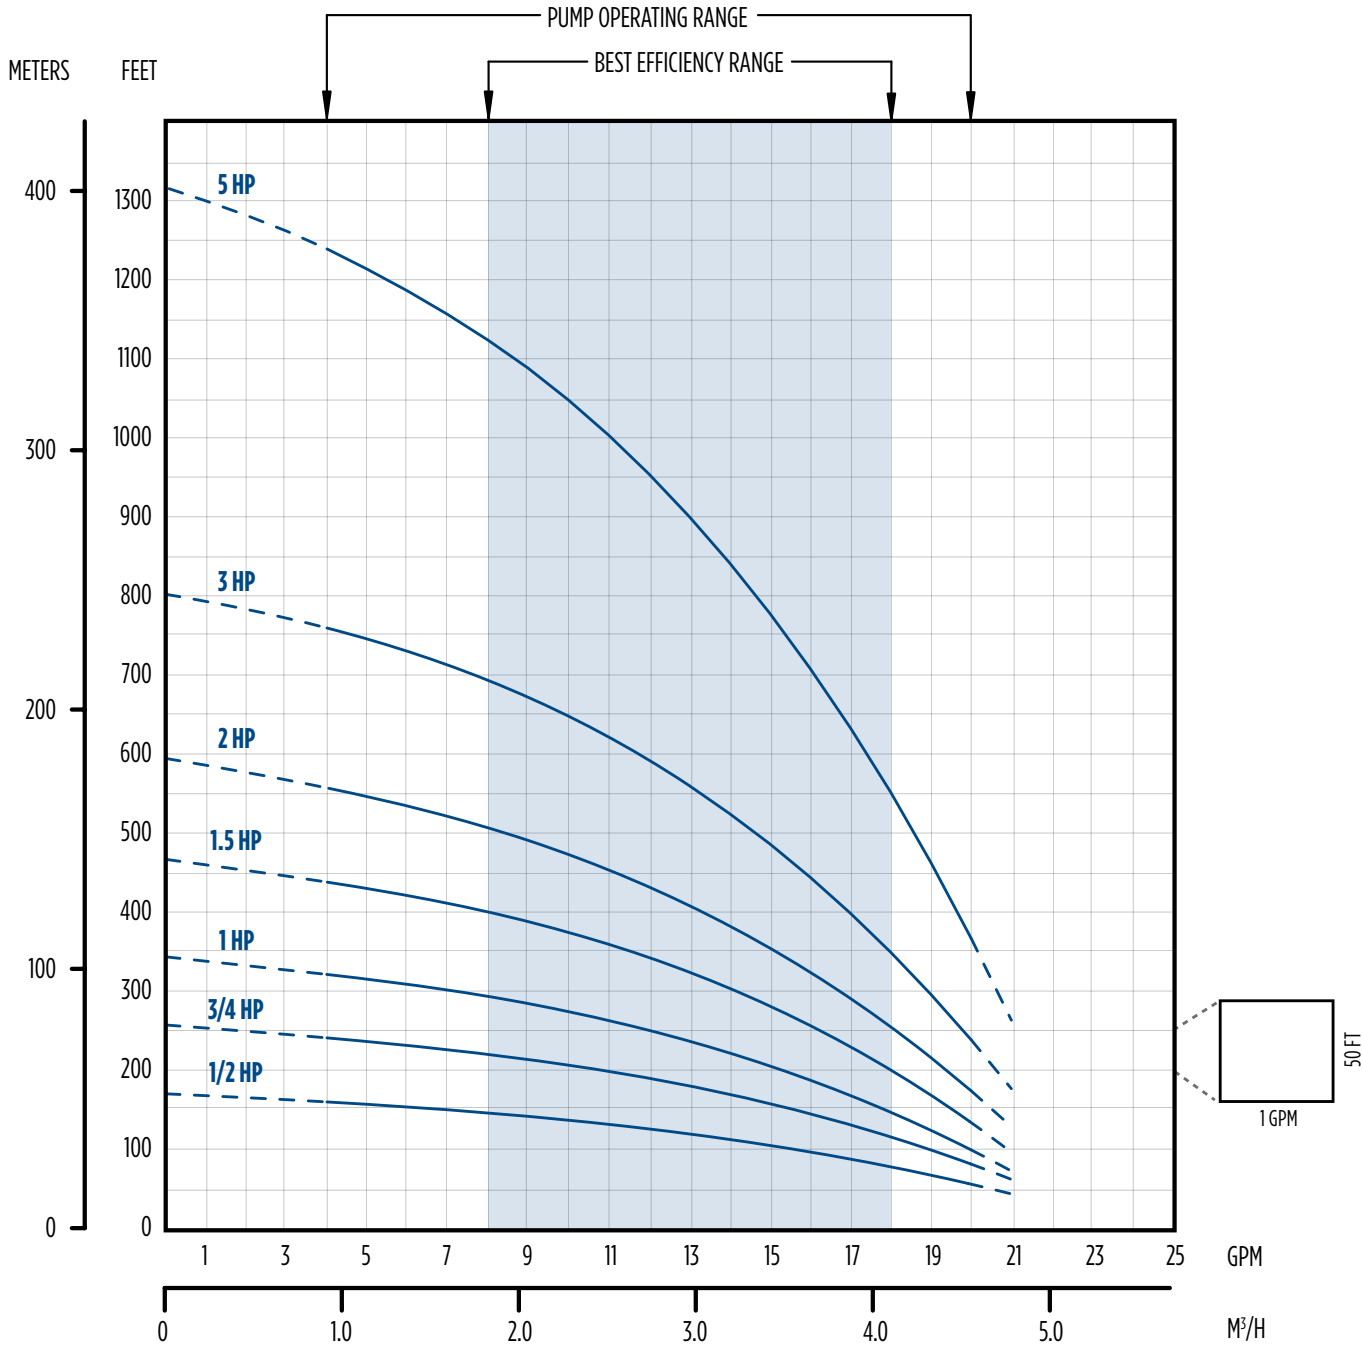

4" TRI-SEAL PUMPS - 15 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																										Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	1100	1200		
1/2	0			20	18	16	13	9	4																		170	
	20	19	17	15	12	8																						
	30	17	14	11	7																							
	40	14	11	6																								
	50	10	5																									
	60	4																										
80																												
Shut-off PSI		65	56	48	39	30	22	13	4																			
3/4	0				20	19	18	16	15	13	11																257	
	20		20	19	17	16	14	12	10	7																		
	30	20	18	17	16	14	12	10	6																			
	40	18	17	15	14	12	9	6																				
	50	17	15	13	11	9	5																					
	60	15	13	11	8	4																						
80		10	7																									
Shut-off PSI		103	94	85	77	68	59	51	42	33	25																	
1	0					20	19	18	17	16	15	13	11	7													343	
	20			20	19	18	17	16	15	14	12	9	6															
	30	20	20	19	18	17	16	15	14	12	10	6																
	40	19	19	18	17	16	15	13	12	10	8																	
	50	18	18	17	16	14	13	12	10	8	5																	
	60	17	16	15	14	13	11	10	7	4																		
80		15	14	12	11	9	6																					
Shut-off PSI		140	131	123	114	105	97	88	79	71	62	45	36	19														
1.5	0						20	20	19	19	18	17	16	14	11	8	4										467	
	20				20	20	19	18	18	17	16	15	14	12	7													
	30				20	20	19	18	18	17	16	15	14	13	10	5												
	40		20	19	19	18	18	17	16	15	15	13	11	9														
	50	20	19	19	18	17	17	16	15	14	13	11	10	7														
	60	19	19	18	17	17	16	15	14	13	12	10	8	4														
80		18	17	16	16	15	14	13	12	11	9	6																
Shut-off PSI		193	185	176	167	159	150	141	133	124	115	98	89	72	46	29	11											
2	0								20	20	19	18	18	17	15	13	12	10	8								594	
	20						20	20	19	19	18	17	17	15	13	11	9	7	5									
	30					20	20	19	19	18	18	16	16	14	12	10	8	5										
	40					20	20	19	19	18	18	17	16	15	14	11	9	6										
	50		20	20	19	19	19	18	17	17	16	15	14	13	10	7	4											
	60	20	20	19	19	18	18	17	17	16	16	14	13	12	9	6												
80		19	19	18	18	17	17	16	15	15	14	12	11	9	5													
Shut-off PSI		249	240	231	223	214	205	197	188	179	171	153	145	127	101	84	67	49	41									
3	0									20	20	19	18	17	16	15	15	12	8								802	
	20								20	20	20	19	19	18	17	16	15	14	13	10	5							
	30							20	20	20	19	19	18	18	16	15	14	13	13	9								
	40						20	20	20	19	19	18	18	17	16	15	14	13	12	8								
	50					20	20	20	19	19	19	18	18	17	15	14	13	12	11	7								
	60				20	20	20	19	19	19	18	17	17	16	15	14	12	11	10	5								
80		20	20	20	19	19	19	18	18	17	16	16	15	13	12	11	9	8										
Shut-off PSI		339	330	321	313	304	295	287	278	269	261	243	235	217	191	174	157	139	131	87	44							

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.


HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																								Shut-Off (ft)
		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400											
5	0				20	19	17	16	15	13	11	9	6													1316
	20			20	19	18	17	15	14	12	10	7	4													
	30			20	19	18	17	15	14	12	9	7														
	40			20	19	18	16	15	13	11	9	6														
	50		20	19	18	17	16	14	13	11	8	5														
	60		20	19	18	17	16	14	12	10	8	4														
Shut-off PSI		527	483	440	397	353	310	267	224	180	137	94	50													

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



4" TRI-SEAL PUMPS - 20 GPM

PERFORMANCE

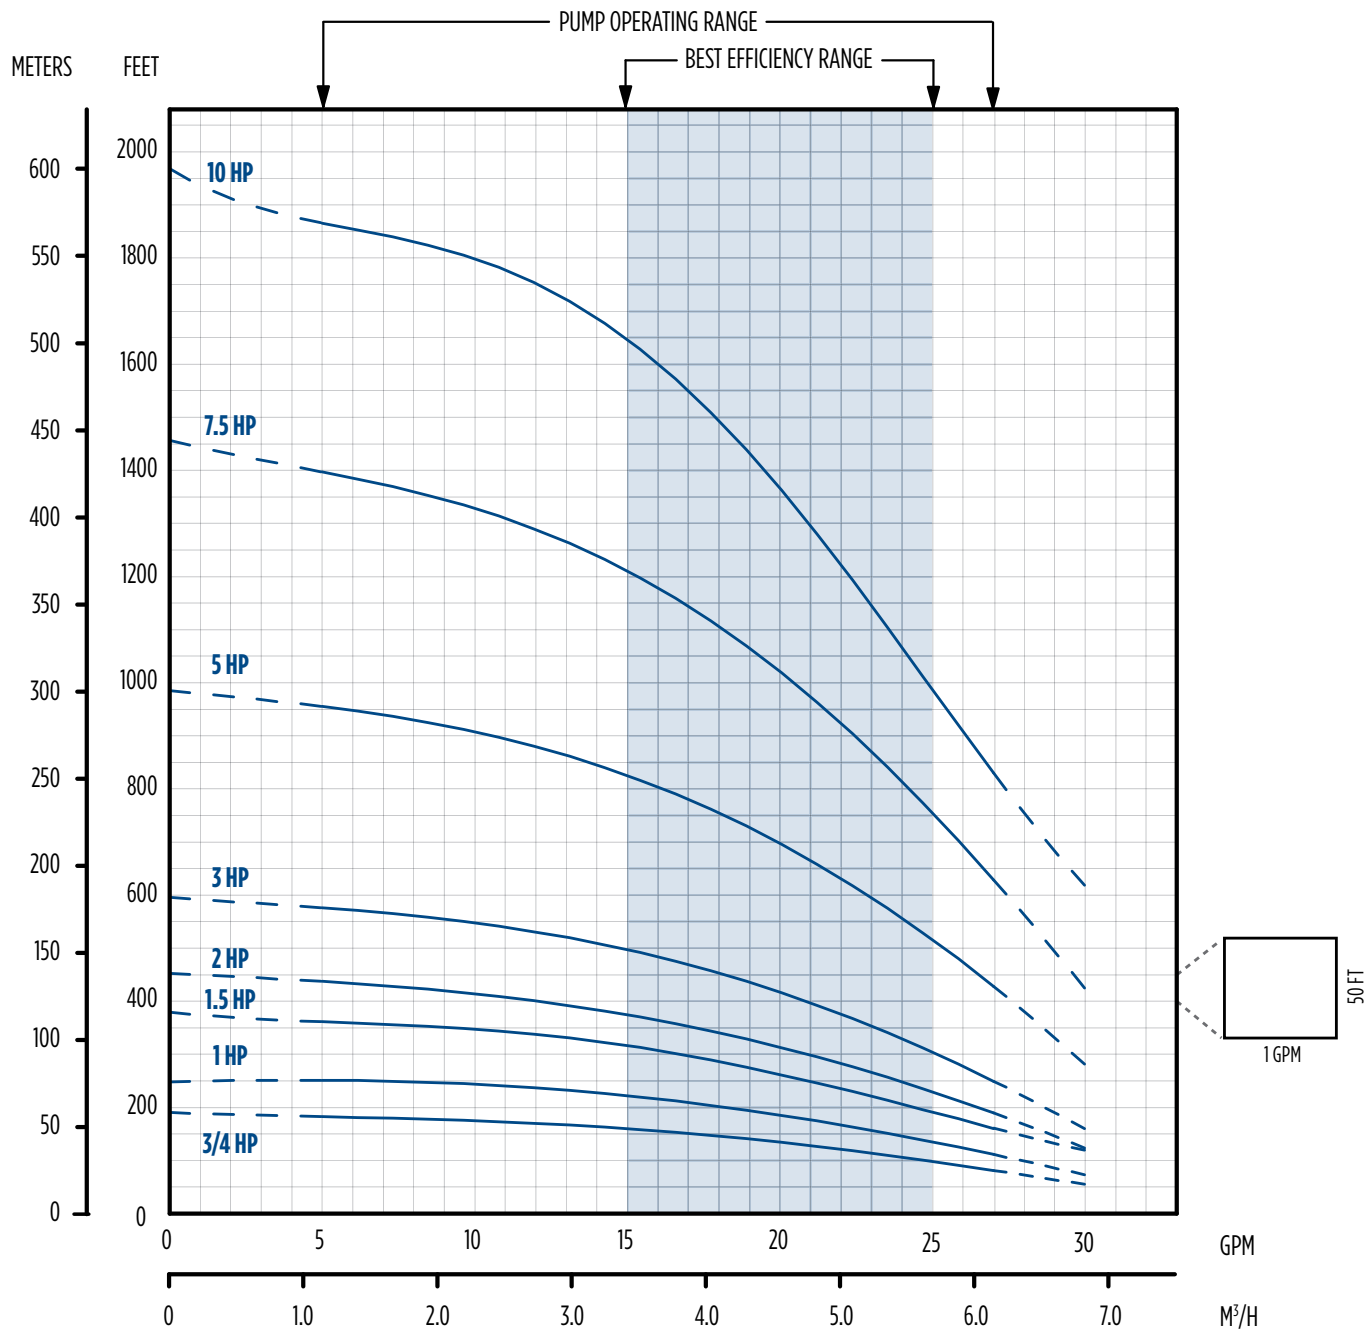

4" TRI-SEAL PUMPS - 20 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																									
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	Shut-Off (ft)		
3/4	0				24	22	21	18	14																	190	
	20		23	21	19	17	12																				
	30	23	21	19	17	11																					
	40	21	19	17	10																						
	50	19	16	10																							
	60	14																									
Shut-off PSI		74	65	56	48	39	30	22	13																		
1	0						26	25	23	20	18	11														251	
	20			27	26	24	22	20	18	15	8																
	30		27	26	24	22	19	17	14	7																	
	40	27	25	23	21	19	17	13																			
	50	25	23	21	19	16	12																				
	60	23	21	18	16	11																					
	70	20	18	15	10																						
80	18	15	9																								
Shut-off PSI		100	91	83	74	66	57	48	40	31	22	5															
1.5	0							27	26	24	22	20	17	6												379	
	20						27	25	24	23	21	18	16	10													
	30					26	25	24	22	21	20	16	13														
	40				26	25	23	22	21	19	18	13	8														
	50		27	26	25	23	22	21	19	17	15	7															
	60	27	26	24	23	22	20	19	17	15	11																
	70	26	24	23	21	20	19	17	14	11	5																
80	24	23	21	20	18	16	14	10																			
Shut-off PSI		156	147	138	130	121	112	104	95	86	78	60	52	34	8												
2	0											24	23	20	16	12										453	
	20										24	21	20	17	12												
	30								24	23	22	20	19	16													
	40							24	23	22	21	19	17	14	10												
	50						24	23	22	20	19	16	14	12													
	60					24	23	22	20	19	18	14	12														
	80			24	23	21	20	19	18	16	14																
Shut-off PSI		187	179	170	161	153	144	135	127	118	110	92	84	66	40	23											
3	0												24	22	20	18	16	14								601	
	20											24	23	20	17	15	12	10									
	30										24	23	21	18	16	13	10										
	40										24	23	22	20	17	14	11										
	50									24	24	22	21	19	16	13											
	60								24	24	23	21	20	18	14	10											
	80							24	23	22	20	18	17	15	10												
Shut-off PSI		251	242	234	225	216	208	199	190	182	173	156	147	130	104	87	69	52	43								
5	0																	24	23	20	16					770	
	20																	24	21	18	13						
	30																		24	23	20	17	11				
	40																		24	23	23	20	16	10			
	50																		24	22	22	17	15				
	60																			24	23	22	21	18	14		
	80																24	23	22	21	20	16	10				
Shut-off PSI		416	408	399	390	382	373	364	356	347	339	321	313	295	269	252	235	217	209	165	122	79					

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.


HP	PSI	440	480	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	Shut-Off (ft)
7.5	0				27	26	24	22	20	18	15	11	5						170
	20				27	25	23	22	19	17	14	9							
	30				26	25	23	21	19	16	13	7							
	40				26	24	23	21	18	16	12	6							
	50			27	26	24	22	20	18	15	11								
	60		27	27	25	24	22	20	17	14	9								
80		27	26	26	24	23	21	19	16	12	6								
Shut-off PSI		440	423	414	371	327	284	241	197	154	111	68	24						
10	0							26	25	23	22	21	20	18	16	13	9		257
	20							27	25	24	23	22	20	19	17	15	12	7	
	30							27	25	24	23	21	20	19	17	14	11	6	
	40							26	25	23	22	21	20	18	16	14	10		
	50					27	26	24	23	22	21	20	18	16	13	8			
	60					27	26	24	23	22	21	19	18	15	12	7			
80						26	25	24	22	21	20	19	17	14	10	5			
Shut-off PSI		662	644	636	592	549	506	462	419	376	333	289	246	203	159	116	73		

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



4" TRI-SEAL PUMPS - 25 GPM

PERFORMANCE

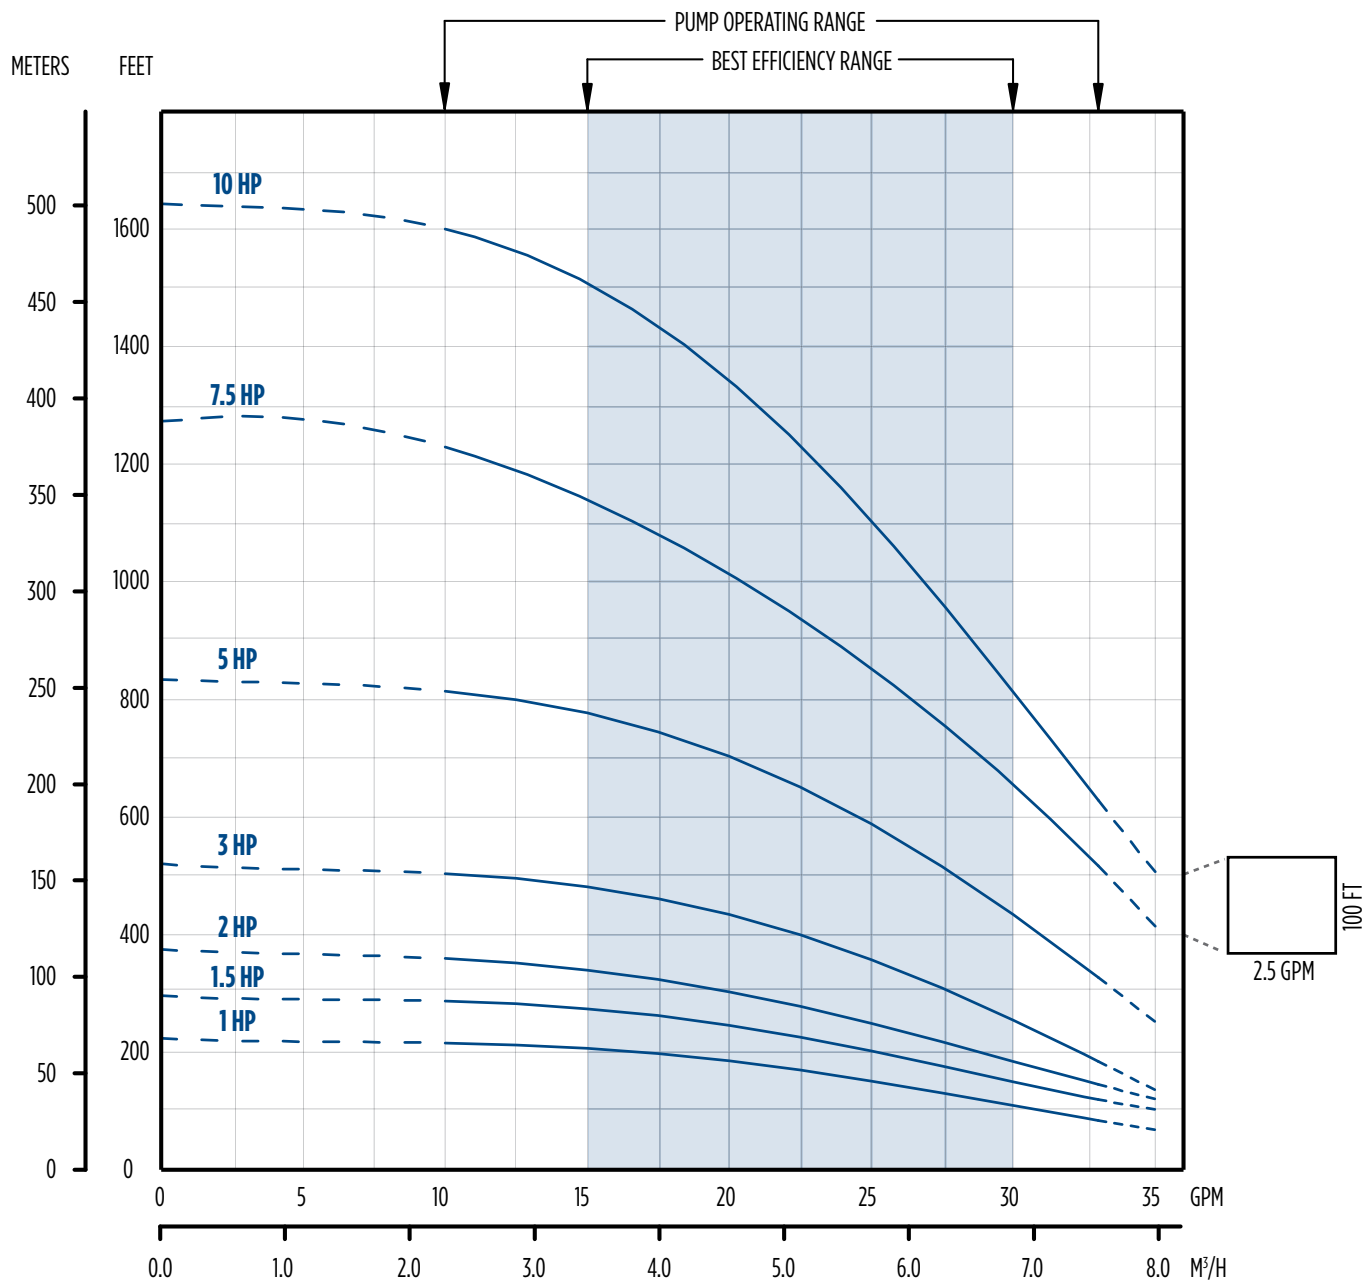

4" TRI-SEAL PUMPS - 25 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																							Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	
1	0			35	33	31	28	26	24	21	17														222
	20		32	30	28	25	22	18	15																
	30	32	29	27	25	22	19																		
	40	29	27	25	22	19																			
	50	26	24	21	16																				
	60	24	21	17																					
Shut-off PSI		87	79	70	61	53	44	35	27	18	10														
1.5	0						33	31	29	27	25	21	19												297
	20				32	30	28	26	24	22	19														
	30			32	30	28	26	24	22	19	16														
	40	33	32	29	27	25	23	21	19	15															
	50	32	29	27	25	23	21	18																	
	60	29	27	25	23	20	18																		
Shut-off PSI		120	111	103	94	85	77	68	59	51	42	25	16												
2	0							33	32	30	28	25	24	20											375
	20				34	33	31	29	28	26	25	21	20												
	30			34	33	31	29	28	26	24	23	19	17												
	40		34	33	31	29	28	26	24	23	21	17													
	50	33	32	30	29	27	26	24	22	20	18														
	60	32	30	28	27	26	24	22	20	18															
Shut-off PSI		154	145	136	128	119	110	102	93	84	76	58	50	32											
3	0							33	32	31	30	29	28	25	24	22	19	15							519
	20						33	32	31	30	29	27	26	24	20										
	30					33	32	31	30	29	28	26	25	22	18										
	40				33	32	31	30	29	28	26	25	22	18											
	50			33	32	31	31	30	29	28	27	24	23	21	15										
	60		33	32	31	31	30	29	28	26	25	23	22	19											
Shut-off PSI		216	207	199	190	181	173	164	155	147	138	121	112	95	69	52	34	17							
5	0												33	32	31	30	28	28	24	20					833
	20												33	32	30	30	28	27	26	22	17				
	30											33	33	31	30	28	27	26	25	21	15				
	40									33	32	32	31	29	28	27	25	24	20						
	50								33	33	32	31	30	28	27	25	24	23	19						
	60							33	33	32	31	31	30	28	26	25	23	22	18						
Shut-off PSI		352	343	326	317	309	300	291	283	274	257	248	231	205	187	170	153	144	101	58					

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.

HP	PSI	300	360	400	440	480	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	
7.5	0					33	33	31	29	26	23	20	17	12						1281
	20				33	32	32	31	28	25	22	19	15							
	30			33	33	32	32	30	27	24	21	18	14							
	40			33	32	32	31	29	27	24	21	17	12							
	50		33	33	32	31	31	29	26	23	20	17								
	60		33	32	32	31	31	28	25	22	19	16								
Shut-off PSI		425	399	382	364	347	338	295	252	208	165	122	78	35						
10	0							33	32	30	29	27	25	23	21	19	15	10		1642
	20							33	31	30	28	26	24	22	20	17	13			
	30							32	31	29	27	26	24	22	19	17	12			
	40						33	32	30	29	27	25	23	21	19	16	10			
	50					33	33	32	30	28	27	25	23	21	18	15				
	60					33	33	31	30	28	26	24	22	20	18	14				
Shut-off PSI		581	555	538	520	503	494	451	408	365	321	278	235	191	148	105	61	18		

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.


4" TRI-SEAL PUMPS - DIMENSIONS

THERMOPLASTIC

GPM	HP	Stages	2-Wire						3-Wire					
			Dimensions (in)			Wt. (lbs)			Dimensions (in)			Wt. (lbs)		
			A	B	C	PE	PMA		A	B	C	PE	PMA	
5	1/2	8	14.12	9.51	23.63	8	26		14.12	9.51	23.63	8	26	
	3/4	12	17.41	10.64	28.05	9	30		17.41	10.64	28.05	9	30	
	1	15	19.87	11.73	31.60	10	34		19.87	11.73	31.60	10	34	
	1.5	21	24.81	15.10	39.91	12	43		24.81	13.60	38.41	12	40	
7	1/2	7	13.30	9.51	22.81	7	25		13.30	9.51	22.81	7	26	
	3/4	10	15.76	10.64	26.40	8	29		15.76	10.64	26.40	8	29	
	1	13	18.23	11.73	29.96	10	34		18.23	11.73	29.96	10	34	
	1.5	18	22.34	15.10	37.44	11	42		22.34	13.60	35.94	11	39	
10	1/2	6	12.97	9.51	22.48	7	25		12.97	9.51	22.48	7	26	
	3/4	8	14.69	10.64	25.33	8	29		14.69	10.64	25.33	8	29	
	1	11	17.44	11.73	29.17	9	33		17.44	11.73	29.17	9	33	
	1.5	15	21.06	15.10	36.16	10	41		21.06	13.60	34.66	10	38	
15	1/2	4	11.45	9.51	20.96	6	24		11.45	9.51	20.96	6	25	
	3/4	6	12.97	10.64	23.61	7	28		12.97	10.64	23.61	7	28	
	1	8	14.69	11.73	26.42	8	32		14.69	11.73	26.42	8	32	
	1.5	11	17.44	15.10	32.54	9	40		17.44	13.60	31.04	9	37	
20	3/4	5	13.65	10.64	24.29	6	28		13.65	10.64	24.29	6	28	
	1	7	16.10	11.73	26.42	8	32		16.10	11.73	27.83	7	31	
	1.5	10	19.77	15.10	34.87	8	39		19.77	13.60	33.37	8	36	
25	1	6	14.88	11.73	26.61	7	31		14.88	11.73	26.61	7	31	
	1.5	8	17.32	15.10	32.42	8	39		17.32	15.10	30.92	8	36	

NOTES: PE = Pump end only; PMA = Pump and motor assembly; Maximum diameter with cable guard is 3.90"

Thermoplastic




4" TRI-SEAL PUMPS - DIMENSIONS

STAINLESS STEEL

GPM	HP	Stages	2-Wire					3-Wire				
			Dimensions (in)			Wt. (lbs)		Dimensions (in)			Wt. (lbs)	
			A	B	C	PE	PMA	A	B	C	PE	PMA
5	1/2	8	13.57	9.51	23.08	10	28	13.57	9.51	23.08	10	29
	3/4	12	16.86	10.64	27.50	12	33	16.86	10.64	27.50	12	33
	1	15	19.33	11.73	31.06	14	38	19.33	11.73	31.06	14	38
	1.5	21	24.26	15.10	39.36	17	48	24.26	13.60	37.86	17	45
	2	26						30.46	15.10	45.56	20	-
7	1/2	7	12.75	9.51	22.26	9	27	12.75	9.51	22.26	9	28
	3/4	10	15.22	10.64	25.86	11	32	15.22	10.64	25.86	11	32
	1	13	17.68	11.73	29.41	13	37	17.68	11.73	29.41	13	37
	1.5	18	21.80	15.10	36.90	15	46	21.80	13.60	35.40	15	43
	2	24	-	-	-	-	-	26.73	15.10	41.83	19	-
	3	32	-	-	-	-	-	35.39	19.04	54.43	23	-
10	1/2	6	12.39	9.51	21.90	7	25	12.39	9.51	21.90	9	28
	3/4	8	14.14	10.64	24.78	10	31	14.14	10.64	24.78	10	31
	1	11	16.85	11.73	28.58	11	35	16.85	11.73	28.58	11	35
	1.5	15	20.48	15.10	35.58	14	45	20.48	13.60	34.08	14	42
	2	18	-	-	-	-	-	25.26	15.10	40.36	15	-
	3	19	-	-	-	-	-	26.17	19.04	45.21	16	-
	5	31	-	-	-	-	-	37.00	29.19	66.19	23	-
15	1/2	4	10.64	9.51	20.15	7	25	10.64	9.51	20.15	7	26
	3/4	6	12.39	10.64	23.03	9	30	12.39	10.64	23.03	9	30
	1	8	14.14	11.73	25.87	10	34	14.14	11.73	25.87	10	34
	1.5	11	16.85	15.10	31.95	11	42	16.85	13.60	30.45	11	39
	2	14	-	-	-	-	-	19.57	15.10	34.67	13	-
	3	19	-	-	-	-	-	26.17	19.04	45.21	16	-
20	5	31	-	-	-	-	-	37.00	29.19	66.19	23	-
	3/4	5	13.10	10.64	23.74	8	29	13.10	10.64	23.74	8	29
	1	7	15.55	11.73	27.28	9	33	15.55	11.73	27.28	9	33
	1.5	10	19.22	15.10	34.32	11	42	19.22	13.60	32.82	11	39
	2	12	-	-	-	-	-	21.66	15.10	36.76	12	-
	3	16	-	-	-	-	-	26.55	19.04	45.59	14	-
	5	26	-	-	-	-	-	40.86	29.19	70.05	20	-
25	7.5	39	-	-	-	-	-	60.77	29.60	90.37	27	-
	10	52	-	-	-	-	-	76.66	32.60	109.26	35	-
	1	6	14.33	11.73	26.06	9	33	14.33	11.73	26.06	9	33
	1.5	8	16.77	15.10	31.87	10	41	16.77	13.60	30.37	10	38
	2	10	-	-	-	-	-	19.22	15.10	34.32	11	-
	3	14	-	-	-	-	-	24.11	19.04	43.15	13	-
	5	23	-	-	-	-	-	37.19	28.19	66.38	18	-
	7.5	35	-	-	-	-	-	55.88	29.60	85.48	25	-
	10	44	-	-	-	-	-	66.88	32.60	99.48	30	-

NOTES: PE = Pump end only; PMA = Pump and motor assembly; Maximum diameter with cable guard is 3.90"

Stainless Steel



4" SERIES V PUMPS

The standard FPS Series Five submersible pump features unique hydraulics that improve efficiency and minimize wear even when pumping abrasives. Discharge and motor brackets are available in thermoplastic or stainless steel with a removable check valve system. Available in 5, 7, 10, 15, 20, and 25 gpm, 1/2 - 5 horsepower. For details on how to become a registered dealer and receive a 5-year warranty, contact your local distributor.

FEATURES

- 6 performance ranges: 5, 7, 10, 15, 20, and 25 gpm
- Horsepower ranges: 1/2 - 5
- Discharge head and motor bracket produced with industry-proven, engineered materials. Available in 300 Series stainless steel or high quality thermoplastic resins.
- Large wrench flat area on the discharge head for ease of installation
- Dry-run designed top bearing positively supports the 300 Series stainless steel 7/16" hex shaft
- Removable internal check valve
- Powered by Franklin Electric corrosion-resistant super stainless 4" submersible motors with lightning protection
- Maximum water temperature with proper flow is 120 °F/49 °C. Consult factory for details



UL 778
CSA 108
NSF/ANSI 372
NSF/ANSI 61 (Pump end only)

4" SERIES V PUMPS - ORDERING INFORMATION

THERMOPLASTIC ORDERING INFORMATION

GPM	HP	Stages	Volts	2-Wire			3-Wire			
				Model	Order	Motor	Model	Order	Motor	Control Box
5	1/2	8	115	5SV05P4-2W115	95300505	2445049004S	5SV05P4-3W115	95300530	2145049004S	2801044915
	1/2	8	230	5SV05P4-2W230	95300510	2445059004S	5SV05P4-3W230	95300535	2145059004S	2801054915
	3/4	12	230	5SV07P4-2W230	95300515	2445079004S	5SV07P4-3W230	95300540	2145079004S	2801074915
	1	15	230	5SV1P4-2W230	95300520	2445089003S	5SV1P4-3W230	95300545	2145089003S	2801084915
7	1.5	21	230	5SV15P4-2W230	95300525	2443099004S	5SV15P4-3W230	95300550	2143099004S	2823008110
	1/2	7	115	7SV05P4-2W115	95300705	2445049004S	7SV05P4-3W115	95300730	2145049004S	2801044915
	1/2	7	230	7SV05P4-2W230	95300710	2445059004S	7SV05P4-3W230	95300735	2145059004S	2801054915
	3/4	10	230	7SV07P4-2W230	95300715	2445079004S	7SV07P4-3W230	95300740	2145079004S	2801074915
10	1	13	230	7SV1P4-2W230	95300720	2445089003S	7SV1P4-3W230	95300745	2145089003S	2801084915
	1.5	18	230	7SV15P4-2W230	95300725	2443099004S	7SV15P4-3W230	95300750	2143099004S	2823008110
	1/2	6	115	10SV05P4-2W115	95301005	2445049004S	10SV05P4-3W115	95301030	2145049004S	2801044915
	1/2	6	230	10SV05P4-2W230	95301010	2445059004S	10SV05P4-3W230	95301035	2145059004S	2801054915
15	3/4	8	230	10SV07P4-2W230	95301015	2445079004S	10SV07P4-3W230	95301040	2145079004S	2801074915
	1	11	230	10SV1P4-2W230	95301020	2445089003S	10SV1P4-3W230	95301045	2145089003S	2801084915
	1.5	15	230	10SV15P4-2W230	95301025	2443099004S	10SV15P4-3W230	95301050	2143099004S	2823008110
	1/2	4	115	15SV05P4-2W115	95301505	2445049004S	15SV05P4-3W115	95301530	2145049004S	2801044915
20	1/2	4	230	15SV05P4-2W230	95301510	2445059004S	15SV05P4-3W230	95301535	2145059004S	2801054915
	3/4	6	230	15SV07P4-2W230	95301515	2445079004S	15SV07P4-3W230	95301540	2145079004S	2801074915
	1	8	230	15SV1P4-2W230	95301520	2445089003S	15SV1P4-3W230	95301545	2145089003S	2801084915
	1.5	11	230	15SV15P4-2W230	95301525	2443099004S	15SV15P4-3W230	95301550	2143099004S	2823008110
25	3/4	5	230	20SV07P4-2W230	95302015	2445079004S	20SV07P4-3W230	95302040	2145079004S	2801074915
	1	7	230	20SV1P4-2W230	95302020	2445089003S	20SV1P4-3W230	95302045	2145089003S	2801084915
	1.5	10	230	20SV15P4-2W230	95302025	2443099004S	20SV15P4-3W230	95302050	2143099004S	2823008110
25	1	6	230	25SV1P4-2W230	95302520	2445089003S	25SV1P4-3W230	95302545	2145089003S	2801084915
	1.5	8	230	25SV15P4-2W230	95302525	2443099004S	25SV15P4-3W230	95302550	2143099004S	2823008110

STAINLESS STEEL ORDERING INFORMATION

GPM	HP	Stages	Volts	2-Wire			3-Wire			
				Model	Order	Motor	Model	Order	Motor	Control Box
5	1/2	8	115	5JV05S4-2W115	95220505	2445049004S	5JV05S4-3W115	95220530	2145049004S	2801044915
	1/2	8	230	5JV05S4-2W230	95220510	2445059004S	5JV05S4-3W230	95220535	2145059004S	2801054915
	3/4	12	230	5JV07S4-2W230	95220515	2445079004S	5JV07S4-3W230	95220540	2145079004S	2801074915
	1	15	230	5JV1S4-2W230	95220520	2445089003S	5JV1S4-3W230	95220545	2145089003S	2801084915
7	1.5	21	230	5JV15S4-2W230	95220525	2443099004S	5JV15S4-3W230	95220550	2143099004S	2823008110
	1/2	7	115	7SV05S4-2W115	95320705	2445049004S	7SV05S4-3W115	95320730	2145049004S	2801044915
	1/2	7	230	7SV05S4-2W230	95320710	2445059004S	7SV05S4-3W230	95320735	2145059004S	2801054915
	3/4	10	230	7SV07S4-2W230	95320715	2445079004S	7SV07S4-3W230	95320740	2145079004S	2801074915
10	1	13	230	7SV1S4-2W230	95320720	2445089003S	7SV1S4-3W230	95320745	2145089003S	2801084915
	1.5	18	230	7SV15S4-2W230	95320725	2443099004S	7SV15S4-3W230	95320750	2143099004S	2823008110
	1/2	6	115	10SV05S4-2W115	95321005	2445049004S	10SV05S4-3W115	95321030	2145049004S	2801044915
	1/2	6	230	10SV05S4-2W230	95321010	2445059004S	10SV05S4-3W230	95321035	2145059004S	2801054915
15	3/4	8	230	10SV07S4-2W230	95321015	2445079004S	10SV07S4-3W230	95321040	2145079004S	2801074915
	1	11	230	10SV1S4-2W230	95321020	2445089003S	10SV1S4-3W230	95321045	2145089003S	2801084915
	1.5	15	230	10SV15S4-2W230	95321025	2443099004S	10SV15S4-3W230	95321050	2143099004S	2823008110
	1/2	4	115	15SV05S4-2W115	95321505	2445049004S	15SV05S4-3W115	95321530	2145049004S	2801044915
20	1/2	4	230	15SV05S4-2W230	95321510	2445059004S	15SV05S4-3W230	95321535	2145059004S	2801054915
	3/4	6	230	15SV07S4-2W230	95321515	2445079004S	15SV07S4-3W230	95321540	2145079004S	2801074915
	1	8	230	15SV1S4-2W230	95321520	2445089003S	15SV1S4-3W230	95321545	2145089003S	2801084915
	1.5	11	230	15SV15S4-2W230	95321525	2443099004S	15SV15S4-3W230	95321550	2143099004S	2823008110
25	3/4	5	230	20SV07S4-2W230	95322015	2445079004S	20SV07S4-3W230	95322040	2145079004S	2801074915
	1	7	230	20SV1S4-2W230	95322020	2445089003S	20SV1S4-3W230	95322045	2145089003S	2801084915
	1.5	10	230	20SV15S4-2W230	95322025	2443099004S	20SV15S4-3W230	95322050	2143099004S	2823008110
25	1	6	230	25SV1S4-2W230	95322520	2445089003S	25SV1S4-3W230	95322545	2145089003S	2801084915
	1.5	8	230	25SV15S4-2W230	95322525	2443099004S	25SV15S4-3W230	95322550	2143099004S	2823008110

4" SERIES V PUMPS - ORDERING INFORMATION

PUMP ENDS ORDERING INFORMATION

THERMOPLASTIC

GPM	HP	Stages	Model	Order
5	1/2	8	5SV05P4-PE	95310500
	3/4	12	5SV07P4-PE	95310501
	1	15	5SV1P4-PE	95310502
	1.5	21	5SV15P4-PE	95310503
7	1/2	7	7SV05P4-PE	95310700
	3/4	10	7SV07P4-PE	95310701
	1	13	7SV1P4-PE	95310702
	1.5	18	7SV15P4-PE	95310703
10	1/2	6	10SV05P4-PE	95311000
	3/4	8	10SV07P4-PE	95311001
	1	11	10SV1P4-PE	95311002
	1.5	15	10SV15P4-PE	95311003
15	1/2	4	15SV05P4-PE	95311500
	3/4	6	15SV07P4-PE	95311501
	1	8	15SV1P4-PE	95311502
	1.5	11	15SV15P4-PE	95311503
20	3/4	5	20SV07P4-PE	95312001
	1	7	20SV1P4-PE	95312002
	1.5	10	20SV15P4-PE	95312003
25	1	6	25SV1P4-PE	95312501
	1.5	8	25SV15P4-PE	95312502

NOTES: Discharge is 1-1/4" NPT; Maximum diameter across cable guard is 3.90" on all models.


STAINLESS STEEL

GPM	HP	Stg.	Model	Order
5	1/2	7	7SV05S4-PE	95330700
	3/4	10	7SV07S4-PE	95330701
	1	13	7SV1S4-PE	95330702
	1.5	18	7SV15S4-PE	95330703
7	2	24	7SV2S4-PE	95330704
	3	32	7SV3S4-PE	95330705
	1/2	6	10SV05S4-PE	95331000
	3/4	8	10SV07S4-PE	95331001
10	1	11	10SV1S4-PE	95331002
	1.5	15	10SV15S4-PE	95331003
	2	18	10SV2S4-PE	95331004
	3	24	10SV3S4-PE	95331005
15	5	39	10SV5S4-PE	95331006
	1/2	4	15SV05S4-PE	95331500
	3/4	6	15SV07S4-PE	95331501
	1	8	15SV1S4-PE	95331502
20	1.5	11	15SV15S4-PE	95331503
	2	14	15SV2S4-PE	95331504
	3	19	15SV3S4-PE	95331505
	5	31	15SV5S4-PE	95331506
25	3/4	5	20SV07S4-PE	95332001
	1	7	20SV1S4-PE	95332002
	1.5	10	20SV15S4-PE	95332003
	2	12	20SV2S4-PE	95332004
30	3	16	20SV3S4-PE	95332005
	5	26	20SV5S4-PE	95332006
	1	6	25SV1S4-PE	95332501
	1.5	8	25SV15S4-PE	95332502
35	2	10	25SV2S4-PE	95332503
	3	14	25SV3S4-PE	95332504
	5	23	25SV5S4-PE	95332505
40	1	6	25FV1S4-PE	95432501
	1.5	8	25FV15S4-PE	95432502
	2	10	25FV2S4-PE	95432503
	3	14	25FV3S4-PE	95432504
45	5	23	25FV5S4-PE	95432505

NOTES: Discharge is 1-1/4" NPT; Maximum diameter across cable guard is 3.90" on all models.

4" SERIES V PUMPS - 5 GPM

PERFORMANCE

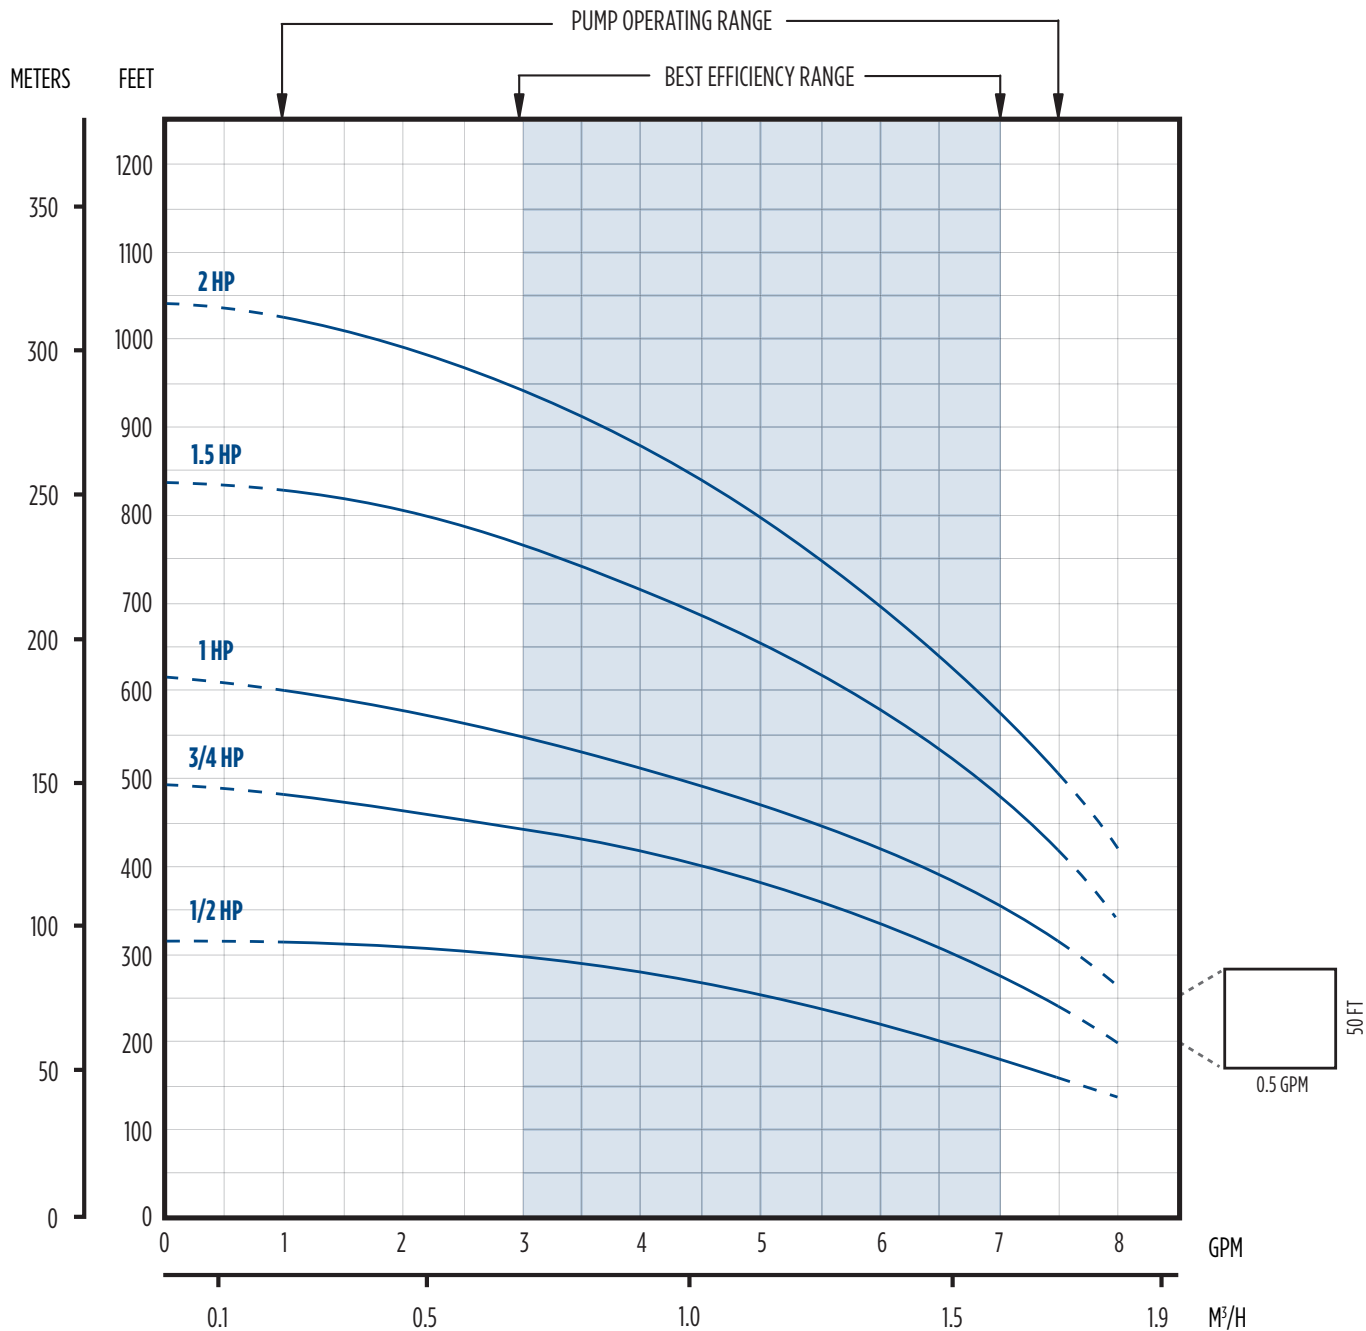



4" SERIES V PUMPS - 5 GPM


PERFORMANCE

HP	PSI	Depth To Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																									
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	Shut-Off (ft)		
1/2	0							7	7	6	6	5	4													315	
	20					8	7	6	6	5	5	3	2														
	30				7	7	6	6	5	5	4	2															
	40			7	7	6	6	5	5	4	3																
	50		7	6	6	6	5	5	4	2																	
	60	7	7	6	6	5	4	4	2																		
80	6	6	5	4	3																						
Shut-off PSI		127	119	110	101	93	84	75	67	58	49	32	23														
3/4	0										7	7	7	6	5	4	3									5495	
	20									7	7	7	6	6	5	4	3										
	30							7	7	7	6	6	6	5	5	3											
	40						7	7	7	6	6	6	5	4	2												
	50					7	7	7	6	6	6	5	5	4													
	60				7	7	7	6	6	6	5	5	4	3													
80		7	7	7	6	6	6	5	5	4	3	3															
Shut-off PSI		205	196	188	179	171	162	153	145	136	127	110	101	84	58	41	23										
1	0												8	7	6	6	5	4	4							615	
	20											7	7	7	6	5	4	3									
	30										7	7	7	6	5	5	3	2									
	40									7	7	7	7	6	5	4	3										
	50								7	7	7	7	6	6	4	3											
	60							7	7	7	7	6	6	5	4												
80						7	7	7	6	6	5	5	4														
Shut-off PSI		257	248	240	231	222	214	205	197	188	179	162	153	136	110	93	75	58	49								
1.5	0														7	7	7	6	5	4	2					835	
	20													7	7	7	6	6	6	5	3						
	30													7	7	7	6	6	6	4	3						
	40												7	7	7	6	6	6	5	4	2						
	50											7	7	7	7	6	6	5	5	3							
	60											7	7	7	6	6	5	5	3								
80									7	7	7	7	6	5	5	4	4	2									
Shut-off PSI		352	344	335	326	318	309	300	292	283	274	257	249	231	205	188	171	153	145	101	58	15					
2	0																7	7	7	6	5	4	3			1040	
	20																7	7	7	6	5	4	2				
	30																7	7	7	6	6	5	3				
	40																7	7	7	6	6	5	3				
	50															7	7	7	6	6	5	4	3				
	60															7	7	7	6	6	5	4	3				
80											7	7	7	6	6	6	6	5	3								
Shut-off PSI		441	432	424	415	406	398	389	381	372	363	346	337	320	294	277	259	242	233	190	147	104	60				

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.

4" SERIES V PUMPS - 7 GPM

PERFORMANCE

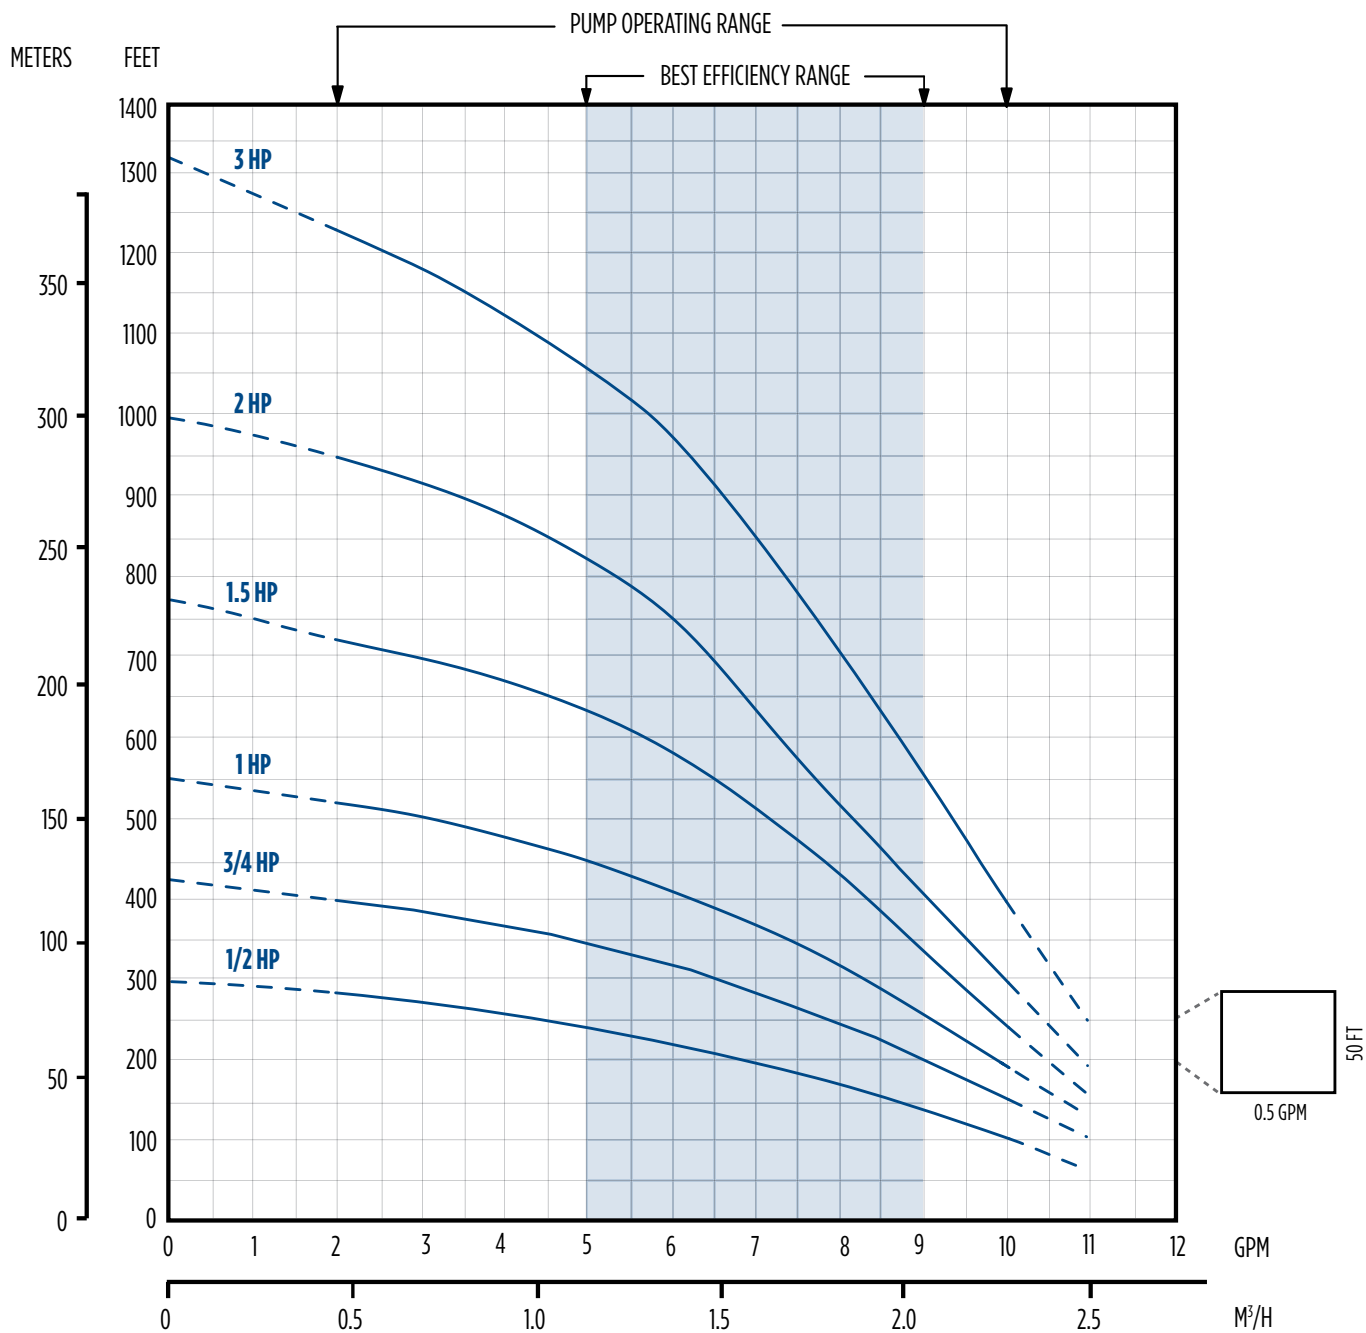

4" SERIES V PUMPS - 7 GPM

PERFORMANCE

HP	PSI	Depth To Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																								
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	Shut-Off (ft)	
1/2	0				10	10	9	9	8	7	6	5	4												300	
	20		10	9	9	8	8	7	6	5	4															
	30	10	9	9	8	7	7	6	5	4	3															
	40	9	9	8	8	7	6	5	4	3																
	50	9	8	7	7	6	5	4	3																	
	60	8	7	6	6	5	4	3																		
	80	6	5	4	3																					
Shut-off PSI		121	112	103	95	86	77	69	60	52	43	26	17													
3/4	0						10	10	9	9	9	8	7	6	4										422	
	20			10	10	10	9	9	8	8	7	6	6	4												
	30		10	10	10	9	9	8	8	7	7	6	5	3												
	40	10	10	10	9	9	8	8	7	7	6	5	4													
	50	10	9	9	9	8	8	7	7	6	6	4	3													
	60	9	9	9	8	8	7	7	6	6	5	3														
	80	8	8	8	7	6	6	5	5	4	3															
Shut-off PSI		174	165	156	148	139	130	122	113	104	96	78	70	52	26											
1	0							10	10	10	9	9	8	8	7	6	5	3	3						544 ft	
	20					10	10	10	9	9	9	8	8	7	6	5	3									
	30			10	10	10	10	9	9	9	8	8	7	6	5	4										
	40		10	10	10	10	9	9	9	8	8	7	7	6	4	3										
	50	10	10	10	10	9	9	9	8	8	8	7	6	5	3											
	60	10	10	9	9	9	9	8	8	8	7	6	6	5	3											
	80	9	9	9	8	8	8	7	7	7	6	5	5	3												
Shut-off PSI		226	218	209	200	192	183	174	166	157	148	131	123	105	79	62	45	27	18							
1.5	0								10	10	10	9	9	9	8	8	7	7	7	5	2				765	
	20						10	10	10	10	9	9	9	8	8	7	7	6	6	4						
	30				10	10	10	10	10	9	9	9	9	8	8	7	7	6	6	3						
	40			10	10	10	10	9	9	9	9	8	8	7	7	6	6	5	3							
	50		10	10	10	10	9	9	9	9	9	8	8	8	7	6	6	5	5							
	60	10	10	10	10	9	9	9	9	9	8	8	8	7	7	6	6	5	4							
	80	10	10	9	9	9	9	9	8	8	8	7	7	6	5	5	4	3								
Shut-off PSI		322	313	305	296	287	279	270	261	253	244	227	218	201	175	158	140	123	114	71	28					
2	0								10	10	10	10	10	9	9	9	8	8	8	7	6	5	3		995	
	20							10	10	10	10	10	9	9	9	8	8	7	7	6	6	4				
	30						10	10	10	10	10	9	9	9	8	8	8	7	7	7	6	5	4			
	40					10	10	10	10	10	9	9	9	9	8	8	7	7	7	6	5	3				
	50				10	10	10	10	10	9	9	9	9	8	8	8	7	7	7	7	6	5	3			
	60			10	10	10	10	10	9	9	9	9	9	8	8	7	7	7	7	7	6	4				
	80	10	10	10	10	10	9	9	9	9	9	9	8	8	7	7	7	6	6	5	3					
Shut-off PSI		421	412	404	395	386	378	369	360	352	343	326	317	300	274	257	239	222	213	170	127	84	40			


NOTES: Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage

HP	PSI	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	Shut-Off (ft)
3	0			10	9	9	8	7	7	6	5	4	2			1310
	20		10	9	9	8	8	7	6	6	5	3				
	30		10	9	9	8	8	7	6	6	4	3				
	40		10	9	9	8	7	7	6	5	4					
	50	10	10	9	8	8	7	7	6	5	4					
	60	10	10	9	8	8	7	7	6	5	3					
	80	10	9	8	8	7	7	6	5	4	2					
Shut-off PSI		523	480	437	394	350	307	264	221	177	134	91	48			

NOTES: Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage

4" SERIES V PUMPS - 10 GPM

PERFORMANCE

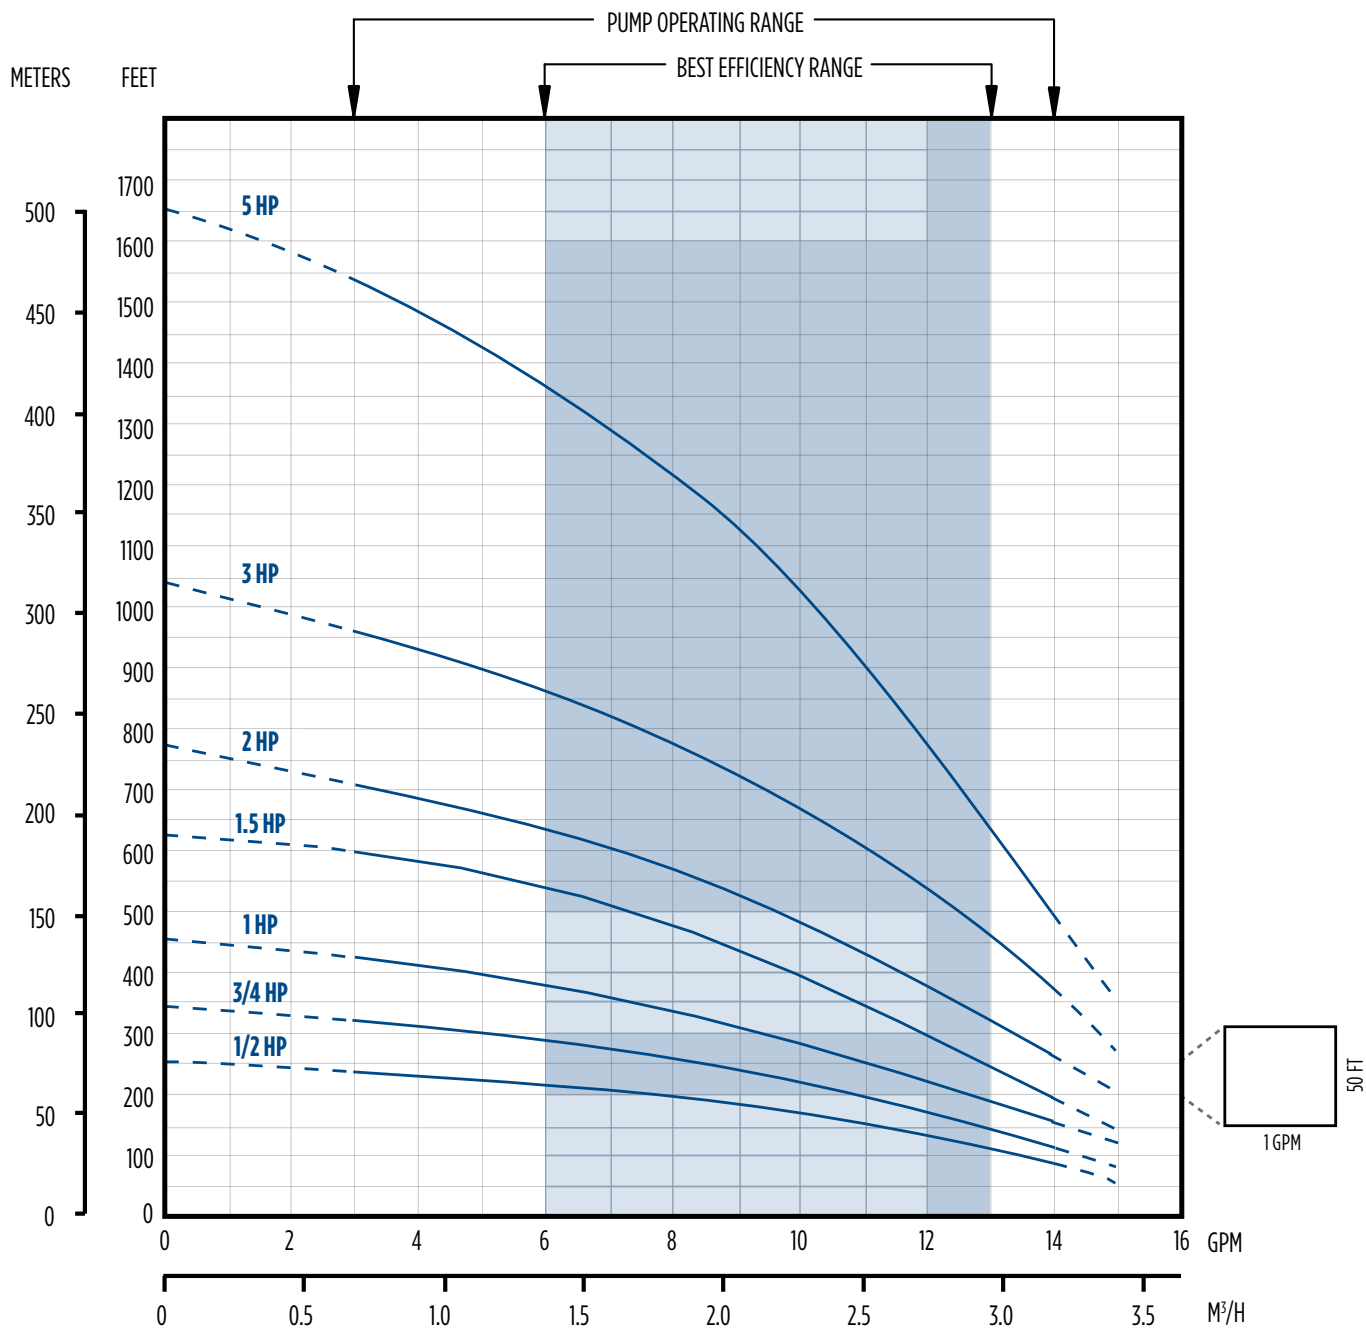

4" SERIES V PUMPS - 10 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																							
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	
1/2	0				14	13	12	11	10	9	7														244
	20	14	13	13	12	11	10	8	6	3															
	30	13	13	12	11	10	8	6	3																
	40	13	12	11	10	8	6	3																	
	50	12	11	9	8	5	3																		
	60	11	10	7	4																				
80		8	6	4																					
Shut-off PSI		97	88	80	71	62	54	45	36	28	19														
3/4	0					14	13	13	12	11	10	7	8	4											338
	20		14	14	13	12	12	11	10	9	8	6	4												
	30	14	14	13	12	12	11	10	9	8	7	3													
	40	14	13	12	12	11	10	9	8	7	6														
	50	13	12	11	11	10	9	8	7	5	3														
	60	12	11	11	10	9	8	6	5																
80		11	10	9	8	6	5																		
Shut-off PSI		137	129	120	111	103	94	85	77	68	59	42	34	16											
1	0							14	13	13	12	11	10	9	7	4									444
	20					14	13	13	12	11	11	9	9	7	3										
	30				14	13	13	12	11	11	10	9	8	6											
	40			14	13	13	12	11	11	10	9	8	7	5											
	50		14	13	12	12	11	11	10	9	8	7	6												
	60	13	12	12	11	11	10	10	9	8	8	5	4												
80		12	12	11	10	10	9	8	7	6	5														
Shut-off PSI		183	174	157	148	140	131	123	114	105	97	79	71	53	27	10									
1.5	0								14	13	13	12	12	11	10	9	9	8	7						615
	20							14	13	13	12	12	11	11	10	9	8	7	6	5					
	30						14	13	13	12	12	11	11	10	8	8	6	5	4						
	40					14	13	13	12	12	11	10	10	8	7	6	4								
	50				14	13	13	12	12	12	11	10	10	9	8	6	5	3							
	60		14	13	13	13	12	12	11	11	11	10	9	9	7	6	4								
80		13	13	13	12	12	11	11	10	10	9	9	8	6	3										
Shut-off PSI		257	248	240	231	222	214	205	197	188	179	162	153	136	110	93	75	41	32						
2	0											14	13	13	12	11	10	10	9	6					770
	20										14	13	13	12	11	10	9	9	8	5					
	30								14	13	13	12	12	10	10	9	8	8	4						
	40							14	13	13	12	12	11	10	9	9	8	7	3						
	50						14	13	13	12	12	11	11	10	9	8	7	6							
	60				14	13	13	13	12	12	11	11	10	9	8	7	6	5							
80				14	13	13	13	12	12	11	11	10	9	8	6	4	4								
Shut-off PSI		324	316	307	298	290	281	272	264	255	246	229	220	203	177	160	143	125	117	73					
3	0														14	13	13	12	12	11	9	7	5		1034
	20													14	13	13	12	12	12	10	8	6	3		
	30												14	14	13	13	12	12	11	10	8	5			
	40											14	14	14	13	12	12	11	11	9	7	4			
	50									14	14	14	14	13	12	12	11	11	10	9	6	3			
	60								14	14	13	13	13	12	12	11	11	10	9	8	5				
80								14	14	13	13	12	12	11	11	10	10	8	5						
Shut-off PSI		438	430	421	413	404	395	387	378	369	361	343	335	317	291	274	257	240	231	188	144	101	58		


NOTES: Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage

HP	PSI	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	Shut-Off (ft)
5	0				14	13	13	12	11	11	10	9	8	6	5	1310
	20				14	13	12	12	11	10	9	8	7	6	4	
	30				14	13	12	12	11	10	9	8	7	5	4	
	40				14	13	12	11	11	10	9	8	7	5	3	
	50				14	13	13	12	11	10	9	7	6	5	3	
	60				14	13	13	12	11	10	9	8	7	6	4	
Shut-off PSI		670	626	583	540	497	453	410	367	324	280	237	194	151	107	

NOTES: Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage

4" SERIES V PUMPS - 15 GPM

PERFORMANCE

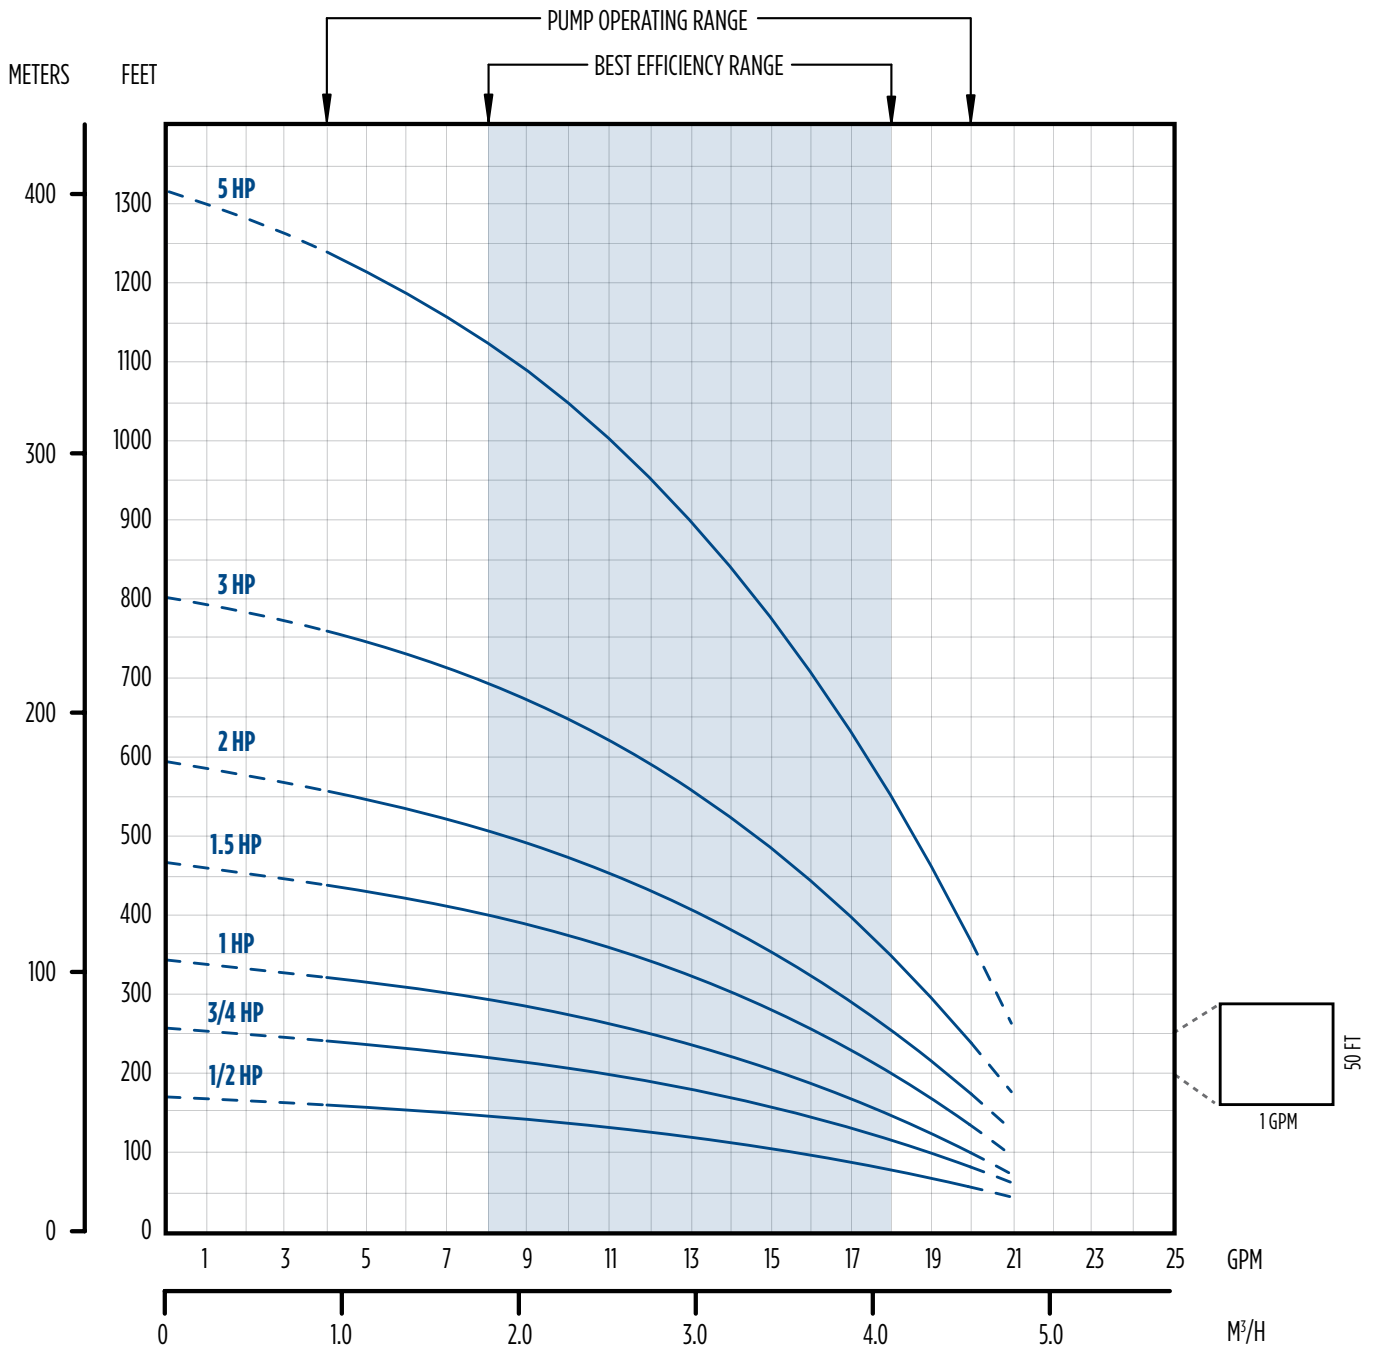

4" SERIES V PUMPS - 15 GPM


PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																								Shut-Off (ft)		
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	1100		1200	
1/2	0			20	18	16	13	9	4																	170		
	20	19	17	15	12	8		9	4																			
	30	17	14	11	7																							
	40	14	11	6																								
	50	10	5																									
	60	4																										
80																												
Shut-off PSI		65	56	48	39	30	22	13	4																			
3/4	0				20	19	18	16	15	13	11															257		
	20		20	19	17	16	14	12	10	7																		
	30	20	18	17	16	14	12	10	6																			
	40	18	17	15	14	12	9	6																				
	50	17	15	13	11	9	5																					
	60	15	13	11	8	4																						
80		10	7																									
Shut-off PSI		103	94	85	77	68	59	51	42	33	25																	
1	0				20	19	18	17	16	15	13	11	7													343		
	20			20	19	18	17	16	15	14	12	9	6															
	30	20	20	19	18	17	16	15	14	12	10	6																
	40	19	19	18	17	16	15	13	12	10	8	5																
	50	18	18	17	16	14	13	12	10	8	5																	
	60	17	16	15	14	13	11	10	7	4																		
80		15	14	12	11	9	6																					
Shut-off PSI		140	131	123	114	105	97	88	79	71	62	45	36	19														
1.5	0						20	20	19	19	18	17	16	14	11	8	4									467		
	20				20	20	19	18	18	17	16	15	14	12	7													
	30			20	20	19	18	18	17	16	15	14	13	10	5													
	40		20	19	19	18	18	17	16	15	15	13	11	9														
	50	20	19	19	18	17	17	16	15	14	13	11	10	7														
	60	19	19	18	17	17	16	15	14	13	12	10	8	4														
80		18	17	16	16	15	14	13	12	11	9	6																
Shut-off PSI		193	185	176	167	159	150	141	133	124	115	98	89	72	46	29	11											
2	0											14	13	13	12	11	10	10	9	6						770		
	20										14	13	13	12	11	10	9	9	8	5								
	30									14	13	13	12	12	11	10	9	9	8	4								
	40								14	13	13	12	12	11	10	9	9	8	7	3								
	50						14	13	13	12	12	11	11	10	9	8	7	6	5									
	60				14	13	13	12	12	11	11	10	9	8	7	6	5											
80				14	13	13	12	12	12	11	11	10	9	8	8	6	4	4										
Shut-off PSI		324	316	307	298	290	281	272	264	255	246	229	220	203	177	160	143	125	117	73								
3	0											20	20	19	18	17	16	15	15	12	8					170		
	20									20	20	19	19	18	17	16	15	14	13	10	5							
	30							20	20	20	19	19	18	18	16	15	14	13	13	9								
	40						20	20	20	19	19	18	18	17	16	15	14	13	12	8								
	50					20	20	20	19	19	19	18	18	17	15	14	13	12	11	7								
	60				20	20	20	19	19	19	18	17	17	16	15	14	12	11	10	5								
80		20	20	20	20	19	19	18	18	17	16	16	15	13	12	11	9	8										
Shut-off PSI		339	330	321	313	304	295	287	278	269	261	243	235	217	191	174	157	139	131	87	44							
5	0														20	20	19	19	19	17	16	15	13	11	9	6	257	
	20														20	20	19	19	18	18	17	15	14	12	10	7		4
	30													20	20	19	19	19	18	18	17	15	14	12	9	7		
	40											20	20	20	19	19	18	18	18	16	15	13	11	9	6			
	50										20	20	20	19	19	18	18	17	17	16	14	13	11	8	5			
	60									20	20	20	20	19	19	18	18	17	17	16	14	12	10	8	4			
80								20	20	20	20	19	19	18	18	17	17	16	15	13	11	9	6					
Shut-off PSI		561	553	544	535	527	518	509	501	492	483	466	457	440	414	397	379	362	353	310	267	224	180	137	94	50		

NOTES: Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage

4" SERIES V PUMPS - 20 GPM

PERFORMANCE

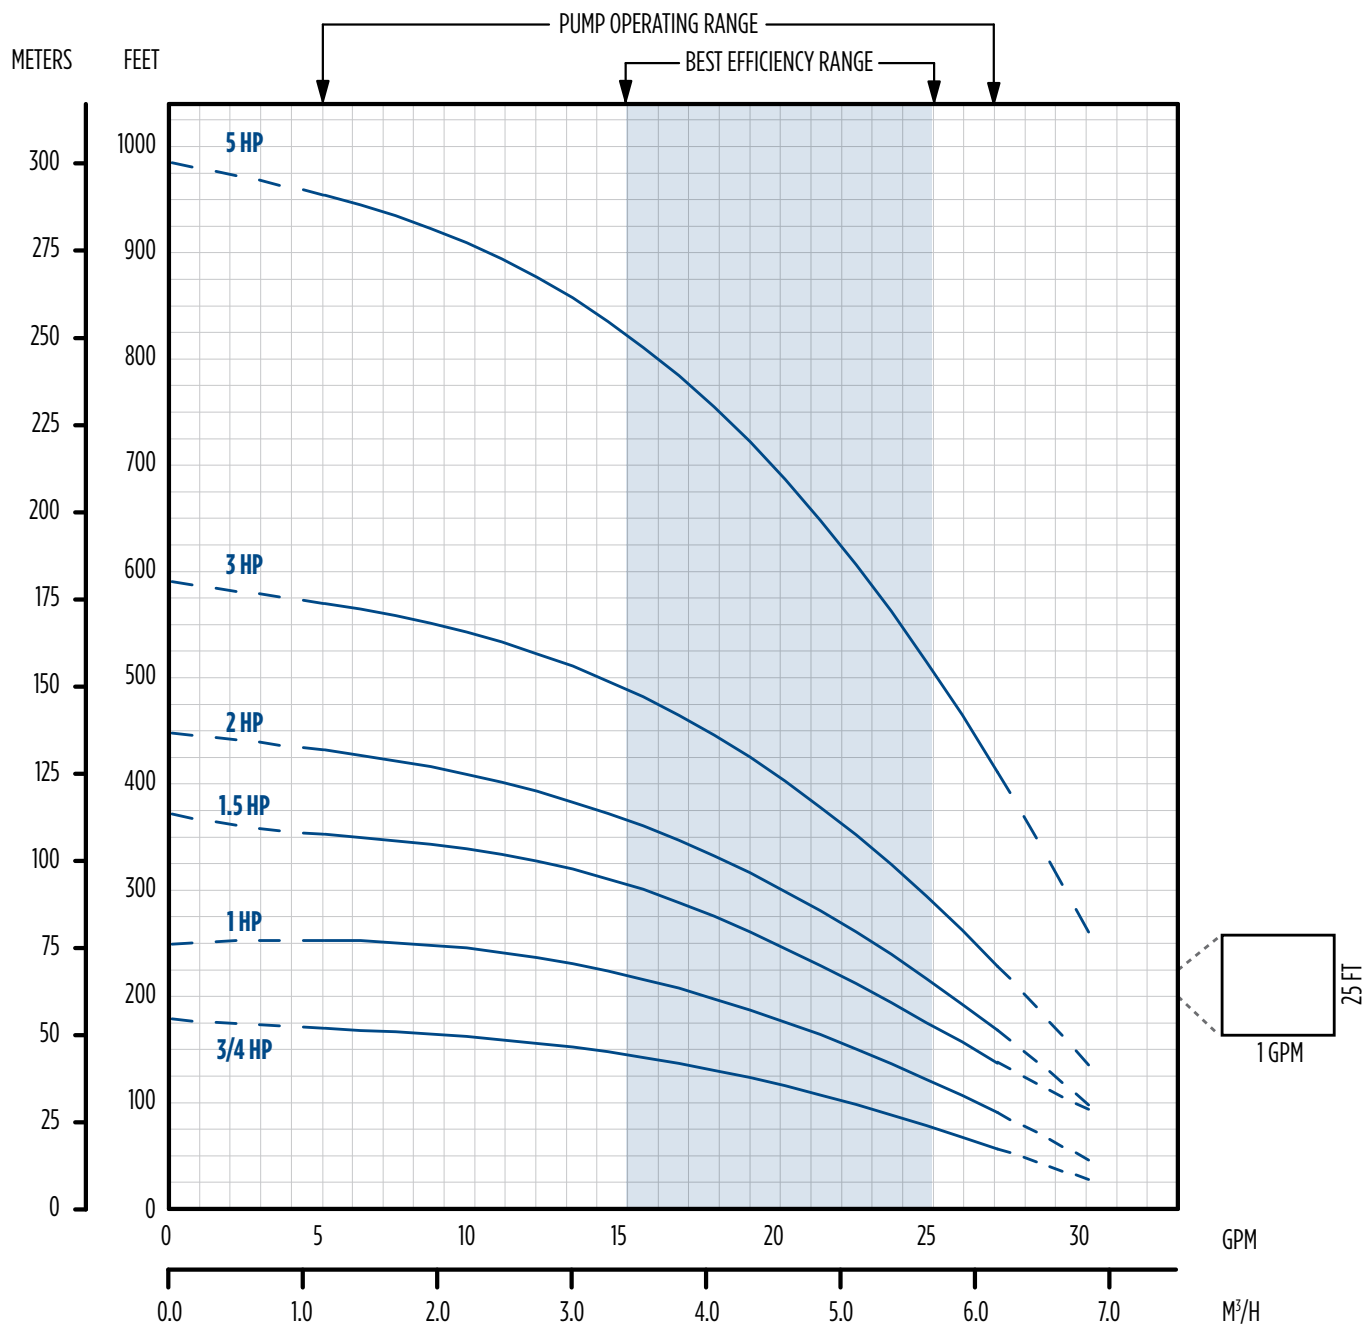



4" SERIES V PUMPS - 20 GPM


PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																								
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000	Shut-Off (ft)	
3/4	0				24	22	21	18	14																190	
	20		23	21	19	17	12																			
	30	23	21	19	17	11																				
	40	21	19	17	10																					
	50	19	16	10																						
	60	14																								
Shut-off PSI		74	65	56	48	39	30	22	13																	
1	0						26	25	23	20	18	11													251	
	20				27	26	24	22	20	18	15	8														
	30		27	26	24	22	19	17	14	7																
	40	27	25	23	21	19	17	13																		
	50	25	23	21	19	16	12																			
	60	23	21	18	16	11																				
	70	20	18	15	10																					
	80	18	15	9																						
Shut-off PSI		100	91	83	74	66	57	48	40	31	22	5														
1.5	0								27	26	24	22	20	17	6										379	
	20						27	25	24	23	21	18	16	10												
	30					26	25	24	22	21	19	18	13	8												
	40				26	25	23	22	21	19	18	13	8													
	50		27	26	25	23	22	21	19	17	15	7														
	60	27	26	24	23	22	20	19	17	15	11															
	70	26	24	23	21	20	19	17	14	11	5															
	80	24	23	21	20	18	16	14	10																	
Shut-off PSI		156	147	138	130	121	112	104	95	86	78	60	52	34	8											
2	0											24	23	20	16	12									453	
	20										24	21	20	17	12											
	30								24	23	22	20	19	16												
	40							24	23	22	21	19	17	14												
	50						24	23	22	20	19	16	14	10												
	60					24	23	22	20	19	18	14	12													
	70				24	23	22	20	19	18	16	14														
	80			24	23	21	20	19	18	16	14															
Shut-off PSI		187	179	170	161	153	144	135	127	118	110	92	84	66	40	23										
3	0													24	22	20	18	16	14						601	
	20												24	23	20	17	15	12	10							
	30											24	23	21	18	16	13	10								
	40										24	23	22	20	17	14	11									
	50									24	24	22	21	19	16	13										
	60								24	24	23	21	20	18	14	10										
	70							24	23	22	20	18	17	15	10											
	80							24	23	22	20	18	17	15	10											
Shut-off PSI		251	242	234	225	216	208	199	190	182	173	156	147	130	104	87	69	52	43							
5	0																	24	23	20	16				770	
	20																	24	21	18	13					
	30																	24	23	20	17	11				
	40																24	23	23	20	16	10				
	50																24	22	22	17	15					
	60															24	23	22	21	18	14					
	70														24	23	22	21	20	16	10					
	80														24	23	22	21	20	16	10					
Shut-off PSI		416	408	399	390	382	373	364	356	347	339	321	313	295	269	252	235	217	209	165	122	79				

NOTES: Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage

4" SERIES V PUMPS - 25 GPM

PERFORMANCE

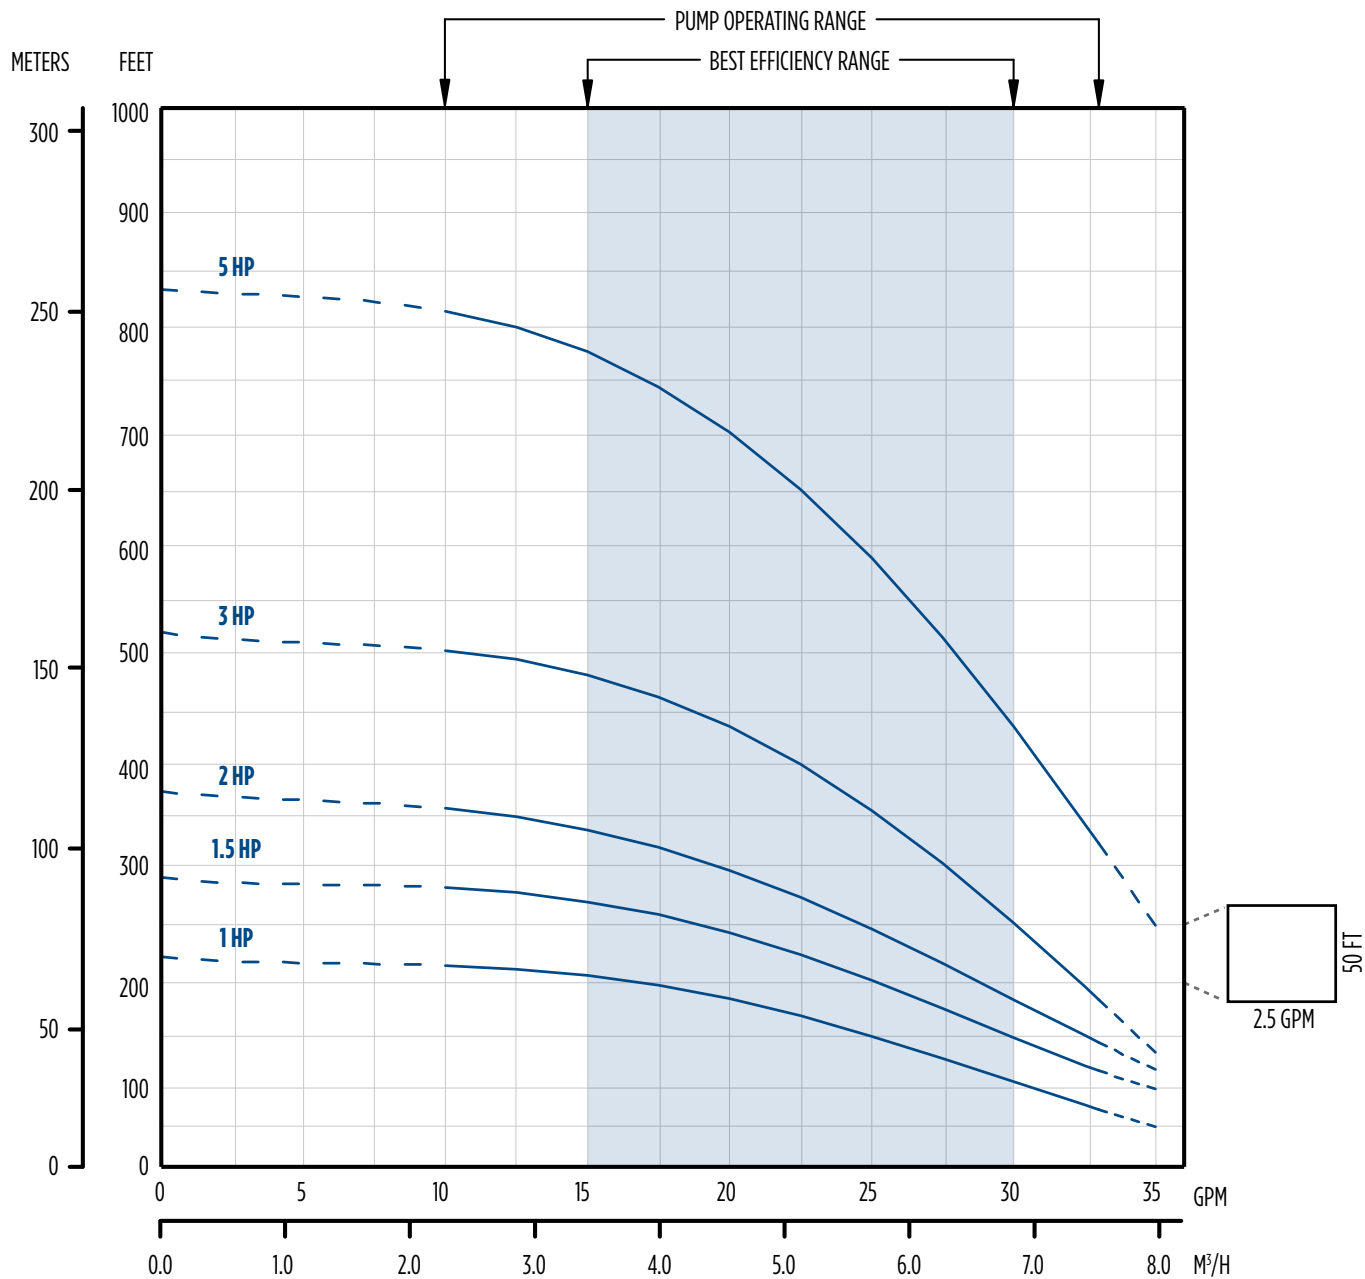



4" SERIES V PUMPS - 25 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																										Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	240	260	300	360	400	440	480	500	600	700	800	900	1000				
1	0			35	33	31	28	26	24	21	17															222		
	20		32	30	28	25	22	18	15																			
	30	32	29	27	25	22	19																					
	40	29	27	25	22	19																						
	50	26	24	21	16																							
	60	24	21	17																								
Shut-off PSI		87	79	70	61	53	44	35	27	18	10																	
1.5	0						33	31	29	27	25	21	19												297			
	20				32	30	28	26	24	22	19																	
	30			32	30	28	26	24	22	19	16																	
	40	33	32	29	27	25	23	21	19	15																		
	50	32	29	27	25	23	21	18																				
	60	29	27	25	23	20	18																					
Shut-off PSI		120	111	103	94	85	77	68	59	51	42	25	16															
2	0							33	32	30	28	25	24	20											375			
	20				34	33	31	29	28	26	25	21	20															
	30			34	33	31	29	28	26	24	23	19	17															
	40		34	33	31	29	28	26	24	23	21	17																
	50	33	32	30	29	27	26	24	22	20	18																	
	60	32	30	28	27	26	24	22	20	18																		
Shut-off PSI		154	145	136	128	119	110	102	93	84	76	58	50	32														
3	0									33	32	30	29	28	24	22	19	15							519			
	20						33	32	31	30	28	27	25	22	19													
	30					33	32	31	30	29	27	26	24	20														
	40				33	32	31	30	29	28	26	25	22	18														
	50			33	32	31	31	30	29	28	27	24	23	21	15													
	60		33	32	31	31	30	29	28	26	25	23	22	19														
Shut-off PSI		216	207	199	190	181	173	164	155	147	138	121	112	95	69	52	34	17										
5	0												33	32	31	30	28	28	24	20					833			
	20												33	32	30	30	28	27	26	22	17							
	30											33	33	31	30	28	27	26	25	21	15							
	40									33	32	32	31	29	28	27	25	24	20									
	50								33	33	32	31	30	28	27	25	24	23	19									
	60							33	33	32	31	31	30	28	26	25	23	22	18									
Shut-off PSI		352	343	326	317	309	300	291	283	274	257	248	231	205	187	170	153	144	101	58								

NOTES: Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage


4" SERIES V PUMPS - DIMENSIONS

THERMOPLASTIC

GPM	HP	Stages	2-Wire					3-Wire				
			Dimensions (in)			Wt. (lbs)		Dimensions (in)			Wt. (lbs)	
			A	B	C	PE	PMA	A	B	C	PE	PMA
5	1/2	8	14.12	9.51	23.63	8	26	14.12	9.51	23.63	8	26
	3/4	12	17.41	10.64	28.05	9	30	17.41	10.64	28.05	9	30
	1	15	19.87	11.73	31.60	10	34	19.87	11.73	31.60	10	34
	1.5	21	24.81	15.10	39.91	12	43	24.81	13.60	38.41	12	40
7	1/2	7	13.30	9.51	22.81	7	25	13.30	9.51	22.81	7	26
	3/4	10	15.76	10.64	26.40	8	29	15.76	10.64	26.40	8	29
	1	13	18.23	11.73	29.96	10	34	18.23	11.73	29.96	10	34
	1.5	18	22.34	15.10	37.44	11	42	22.34	13.60	35.94	11	39
10	1/2	6	12.97	9.51	22.48	7	25	12.97	9.51	22.48	7	26
	3/4	8	14.69	10.64	25.33	8	29	14.69	10.64	25.33	8	29
	1	11	17.44	11.73	29.17	9	33	17.44	11.73	29.17	9	33
	1.5	15	21.06	15.10	36.16	10	41	21.06	13.60	34.66	10	38
15	1/2	4	11.45	9.51	20.96	6	24	11.45	9.51	20.96	6	25
	3/4	6	12.97	10.64	23.61	7	28	12.97	10.64	23.61	7	28
	1	8	14.69	11.73	26.42	8	32	14.69	11.73	26.42	8	32
	1.5	11	17.44	15.10	32.54	9	40	17.44	13.60	31.04	9	37
20	3/4	5	13.65	10.64	24.29	6	28	13.65	10.64	24.29	6	28
	1	7	16.10	11.73	26.42	8	32	16.10	11.73	27.83	7	31
	1.5	10	19.77	15.10	34.87	8	39	19.77	13.60	33.37	8	36
25	1	6	14.88	11.73	26.61	7	31	14.88	11.73	26.61	7	31
	1.5	8	17.32	15.10	32.42	8	39	17.32	15.10	30.92	8	36

NOTES: PE = Pump end only; PMA = Pump and motor assembly; Maximum diameter with cable guard is 3.90"

Thermoplastic




STAINLESS STEEL

GPM	HP	Stages	2-Wire					3-Wire				
			Dimensions (in)			Wt. (lbs)		Dimensions (in)			Wt. (lbs)	
			A	B	C	PE	PMA	A	B	C	PE	PMA
5	1/2	8	13.57	9.51	23.08	10	28	13.57	9.51	23.08	10	29
	3/4	12	16.86	10.64	27.50	12	33	16.86	10.64	27.50	12	33
	1	15	19.33	11.73	31.06	14	38	19.33	11.73	31.06	14	38
	1.5	21	24.26	15.10	39.36	17	48	24.26	13.60	37.86	17	45
	2	26	-	-	-	-	-	30.46	15.10	45.56	20	-
7	1/2	7	12.75	9.51	22.26	9	27	12.75	9.51	22.26	9	28
	3/4	10	15.22	10.64	25.86	11	32	15.22	10.64	25.86	11	32
	1	13	17.68	11.73	29.41	13	37	17.68	11.73	29.41	13	37
	1.5	18	21.80	15.10	36.90	15	46	21.80	13.60	35.40	15	43
	2	24	-	-	-	-	-	26.73	15.10	41.83	19	-
10	3	32	-	-	-	-	-	35.39	19.04	54.43	23	-
	1/2	6	12.39	9.51	21.90	7	25	12.39	9.51	21.90	7	28
	3/4	8	14.14	10.64	24.78	10	31	14.14	10.64	24.78	10	31
	1	11	16.85	11.73	28.58	11	35	16.85	11.73	28.58	11	35
	1.5	15	20.48	15.10	35.58	14	45	20.48	13.60	34.08	14	42
15	2	18	-	-	-	-	-	25.26	15.10	40.36	15	-
	3	19	-	-	-	-	-	26.17	19.04	45.21	16	-
	5	31	-	-	-	-	-	37.00	29.19	66.19	23	-
	1/2	4	10.64	9.51	20.15	7	25	10.64	9.51	20.15	7	26
	3/4	6	12.39	10.64	23.03	9	30	12.39	10.64	23.03	9	30
20	1	8	14.14	11.73	25.87	10	34	14.14	11.73	25.87	10	34
	1.5	11	16.85	15.10	31.95	11	42	16.85	13.60	30.45	11	39
	2	14	-	-	-	-	-	19.57	15.10	34.67	13	-
	3	19	-	-	-	-	-	26.17	19.04	45.21	16	-
	5	31	-	-	-	-	-	37.00	29.19	66.19	23	-
25	3/4	5	13.10	10.64	23.74	8	29	13.10	10.64	23.74	8	29
	1	7	15.55	11.73	27.28	9	33	15.55	11.73	27.28	9	33
	1.5	10	19.22	15.10	34.32	11	42	19.22	13.60	32.82	11	39
	2	12	-	-	-	-	-	21.66	15.10	36.76	12	-
	3	16	-	-	-	-	-	26.55	19.04	45.59	14	-
25	5	26	-	-	-	-	-	40.86	29.19	70.05	20	-
	7.5	39	-	-	-	-	-	60.77	29.60	90.37	27	-
	10	52	-	-	-	-	-	76.66	32.60	109.26	35	-
	1	6	14.33	11.73	26.06	9	33	14.33	11.73	26.06	9	33
	1.5	8	16.77	15.10	31.87	10	41	16.77	13.60	30.37	10	38
25	2	10	-	-	-	-	-	19.22	15.10	34.32	11	-
	3	14	-	-	-	-	-	24.11	19.04	43.15	13	-
	5	23	-	-	-	-	-	37.19	28.19	66.38	18	-
	7.5	35	-	-	-	-	-	55.88	29.60	85.48	25	-
	10	44	-	-	-	-	-	66.88	32.60	99.48	30	-

NOTES: PE = Pump end only; PMA = Pump and motor assembly; Maximum diameter with cable guard is 3.90"

Stainless Steel



4" HIGH CAPACITY PUMPS

FEATURES

- 4 performance ranges - 35, 45, 60, and 90 gpm
- Stainless steel discharge head and motor bracket
- High flow impellers and stages are glass-filled modified PPO for maximum efficiency
- Ceramic shaft sleeve and rubber discharge bearing eliminates sand wear
- Intermediate bearing for increased shaft stability
- Floating eye and hub seals for improved performance and efficiency
- Stainless steel hex pump shaft, shell, and shaft coupling
- High capacity upthrust assembly for protection during start-up and operation (45, 60, and 90 gpm models)
- Powered by Franklin's corrosion-resistant 4" submersible motors
- 2" NPT discharge



UL 778
CSA 108
NSF/ANSI 372
NSF/ANSI 61 (Pump end only)

4" HIGH CAPACITY PUMPS - ORDERING INFORMATION

ORDERING INFORMATION

1 - 10 HP 4" Pump Ends							
GPM	HP	Stages	Model	Order No.		Dimensions (in) Pump End Only	Wt. (lbs)
				With Check Valve	Without Check Valve		
35	1	6	35LD1S4-PE	90643506	93443506	15.00	9
	1.5	8	35LD1S54-PE	90643508	93443508	17.50	10
	2	10	35LD2S4-PE	90643510	93443510	20.00	11
	3	14	35LD3S4-PE	90643514	93443514	25.00	13
	5	22	35LD5S4-PE	90643522	93443522	35.00	17
	7.5	34	35LD7S4-PE	90643534	93443534	52.17	25
45	10	42	35LD10S4-PE	90643542	93443542	62.23	31
	1.5	6	45LD1S54-PE	90644506	93444506	21.00	15
	2	8	45LD2S4-PE	90644508	93444508	25.50	16
	3	11	45LD3S4-PE	90654511	93444511	32.25	19
	5	18	45LD5S4-PE	90644518	93444518	47.75	25
	7.5	26	45LD7S4-PE	90644526	93444526	65.25	33
60	10	31	45LD10S4-PE	90644531	93444531	78.30	38
	2	6	60LD2S4-PE	90646006	93446006	21.00	15
	3	8	60LD3S4-PE	90646008	93446008	25.50	17
	5	13	60LD5S4-PE	90646013	93446013	36.75	21
	7.5	17	60LD7S4-PE	90646017	93446017	45.25	25
	10	24	60LD10S4-PE	90646024	93446024	61.00	31
90	2	5	90LD2S4-PE	90649005	93449005	22.56	15
	3	7	90LD3S4-PE	90649007	93449007	28.56	17
	5	12	90LD5S4-PE	90649012	93449012	43.56	21
	7.5	19	90LD7S4-PE	90649019	93449019	64.50	27
	10	24	90LD10S4-PE	90649020	93449020	79.25	31

NOTES: Discharge is 2" NPT. Maximum diameter across cable guard is 3.90" on all models.

1 - 1.5 HP Single-Phase Units (2-Wire)							
GPM	HP	Stages	Volts	Model	Order No.		Wt. (lbs)
					With Check Valve	Without Check Valve	
35	1	6	230	35LD1S4-2W230	90643606	93443606	33
	1.5	8		35LD1S54-2W230	90643608	93443608	41
45	1.5	6		45LD1S54-2W230	90644606	93444606	46

NOTES: All listed above have 2" NPT discharge. Order check valve separately. Pump and motor will be individually cartoned and require assembly.


1 - 1.5 HP Single-Phase Units (3-Wire)							
GPM	HP	Stages	Volts	Model	Order No.		Wt. (lbs)
					With Check Valve	Without Check Valve	
35	1	6	230	35LD1S4-3W230	90643706	93443706	33
	1.5	8		35LD1S54-3W230	90643708	93443708	39
45	1.5	6		45LD1S54-3W230	90644706	93444706	44

NOTES: All listed above have 2" NPT discharge. Order check valve separately. Pump and motor will be individually cartoned and require assembly.



4" HIGH CAPACITY PUMPS - 35 GPM

PERFORMANCE

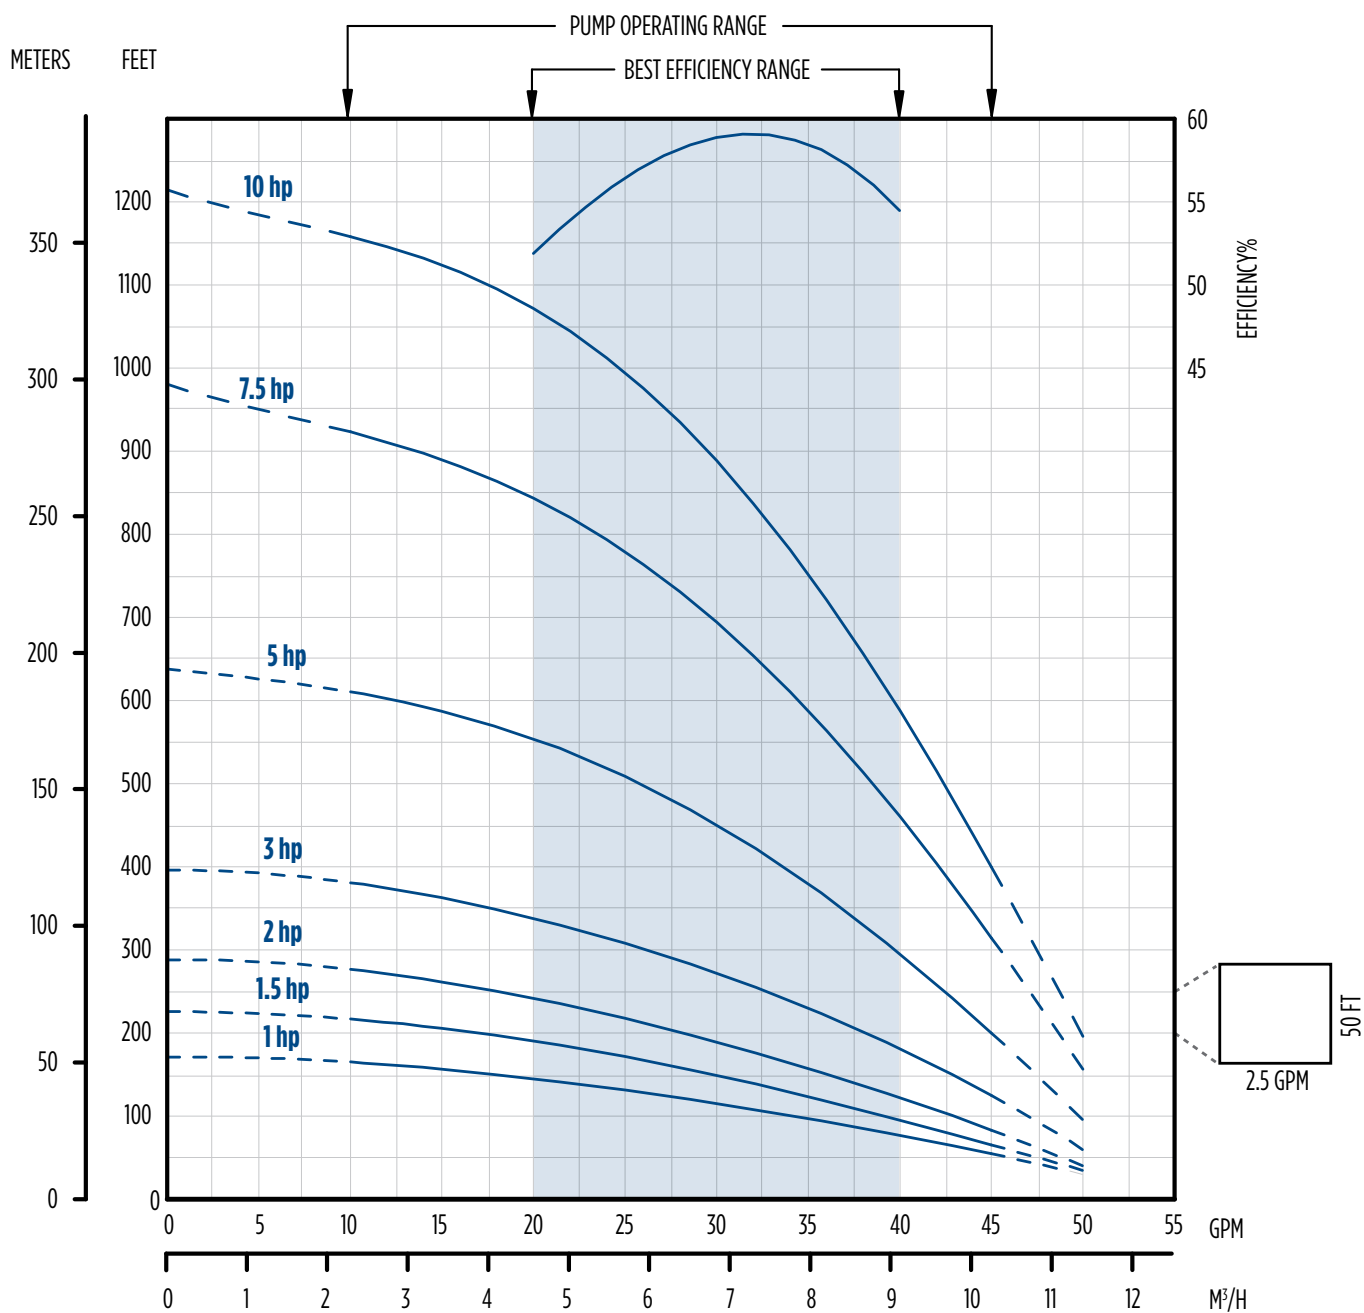

4" HIGH CAPACITY PUMPS - 35 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																			Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600		
1	0			44	40	34	28	22	13											171	
	10		43	39	33	27	21	11													
	20	43	38	32	26	20															
	30	37	31	26	19																
	40	30	25	18																	
	50	24	16																		
	60	14																			
	70																				
80																					
Shut-off PSI		65	57	48	39	31	22	13	5												
1.5	0			45	43	40	36	31	27	23	18									226	
	10		45	42	39	35	31	27	23	16											
	20	45	42	38	34	30	26	22	15												
	30	41	38	34	30	26	21	14													
	40	37	33	29	25	20	12														
	50	32	29	24	19	10															
	60	28	24	18																	
	70	23	17																		
80	16																				
Shut-off PSI		89	81	72	63	55	46	37	29	20	11										
2	0			45	43	41	38	34	31	28	19									288	
	10			45	43	40	37	34	31	27	24	11									
	20		45	43	40	37	33	30	27	24	20										
	30	44	42	39	36	33	30	26	23	19	12										
	40	42	39	36	32	29	26	22	18	11											
	50	39	35	32	29	25	22	17	10												
	60	35	31	28	25	21	16														
	70	31	28	24	21	15															
80	27	24	20	14																	
Shut-off PSI		116	107	99	90	81	73	64	55	47	38	16									
3	0					45	44	42	41	38	32	28	18							396	
	10					45	44	42	40	38	36	29	23	12							
	20				45	44	42	40	38	35	33	27	19								
	30			45	43	42	40	37	35	32	30	24	13								
	40		44	43	41	39	37	34	32	29	27	20									
	50	44	43	41	39	37	34	32	29	27	24	14									
	60	43	41	39	36	34	31	29	26	24	21										
	70	40	38	36	33	31	28	26	23	20	15										
80	38	35	33	30	28	25	23	19	15												
Shut-off PSI		163	154	145	137	128	120	111	102	94	85	63	42	20							
5	0									45	43	40	37	33	30	26	21	12		638	
	10									45	44	42	39	35	32	28	24	18			
	20								45	44	43	40	37	34	30	26	21	13			
	30						45	45	44	43	42	39	35	32	28	24	18				
	40					45	44	44	43	42	41	37	34	30	27	22	14				
	50				45	44	44	43	42	40	39	36	32	29	25	19					
	60			45	44	43	42	41	40	39	38	34	31	27	22	15					
	70		45	44	43	42	41	40	39	37	36	32	29	25	19						
80	45	44	43	42	41	40	38	37	36	34	31	27	23	15							
Shut-off PSI		268	259	250	242	233	224	216	207	198	190	168	146	125	103	81	60	38	16		

HP	PSI	120	140	160	180	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	
7.5	0								44	42	40	38	36	34	32	30	27	24	19	13	980
	10							45	43	41	39	38	36	33	31	29	26	22	17	10	
	20							44	42	40	39	37	35	32	30	27	24	20	14		
	30						45	43	41	40	38	36	34	31	29	26	22	17	11		
	40						44	42	41	39	37	35	33	30	27	24	20	14			
	50					45	43	42	40	38	36	34	32	29	25	22	18	11			
	60				45	44	43	41	39	37	35	33	30	28	24	20	15				
	70		45	45	44	43	42	40	38	36	34	32	29	26	23	18	12				
	80	45	45	44	43	43	41	39	37	35	33	31	28	25	21	15					
Shut-off PSI		373	364	355	347	338	316	295	274	251	230	208	186	165	143	121	100	78	56	35	


HP	PSI	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	Shut-Off (ft)
10	0					45	44	43	41	40	38	36	35	33	31	30	28	25	22	17	11	1215
	10					45	43	42	41	39	37	36	34	32	31	29	26	24	20	15		
	20				45	44	43	41	40	38	37	35	33	32	30	28	25	22	18	12		
	30				45	43	42	41	39	38	36	34	32	31	29	27	24	20	15			
	40			45	44	43	41	40	38	37	35	33	32	30	28	25	22	18	12			
	50			45	44	42	41	39	38	36	34	33	31	29	27	24	20	16				
	60		45	44	43	42	40	39	37	35	34	32	30	28	26	23	18	13				
	70		45	44	42	41	39	38	36	34	33	31	29	27	24	21	16					
	80	45	44	43	42	40	38	37	35	34	32	30	28	26	23	19	13					
Shut-off PSI		439	418	396	374	353	331	309	288	266	245	223	201	180	158	136	115	93	71	50	28	

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage. Performance shown is based on a pump without check valve.



4" HIGH CAPACITY PUMPS - 45 GPM

PERFORMANCE

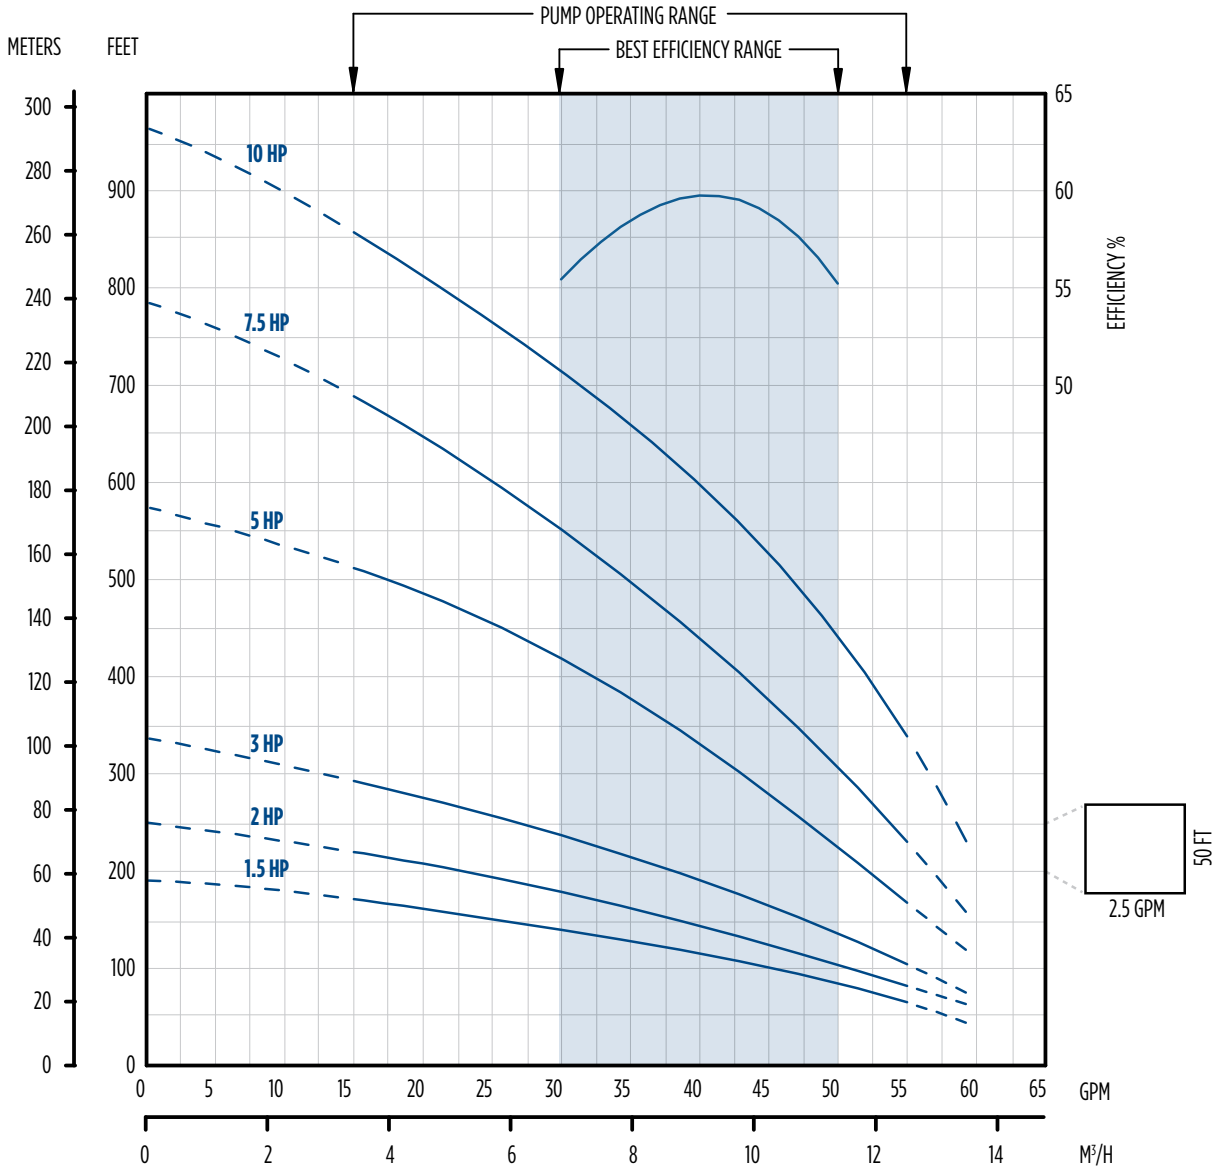

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																		Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	
1.5	0				52	46	38	30	21											190
	10		55	51	45	37	26	20												
	20	54	50	43	35	27	18													
	30	49	42	34	26	16														
	40	41	33	24	15															
	50	32	23																	
	60	22																		
Shut-off PSI		74	65	56	48	39	30	22	13											
2	0				55	51	46	41	36	30	23									250
	10			55	50	45	40	35	29	22										
	20		54	49	44	39	34	28	21											
	30	53	49	44	38	33	27	19												
	40	48	43	38	32	26	18													
	50	42	37	31	24	17														
	60	36	30	23	16															
Shut-off PSI		99	91	82	74	65	56	48	39	30	22									

4" HIGH CAPACITY PUMPS - 45 GPM


PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																			Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	
3	0						53	49	46	42	38	27									337
	10				55	52	49	45	41	37	33	21									
	20			55	52	48	45	41	37	32	26										
	30		54	51	48	44	40	36	32	27	22										
	40	54	51	47	44	40	35	31	26	21	15										
	50	50	47	43	39	35	30	25	20												
	60	46	42	38	34	30	25	19													
	70	42	38	33	29	24	18														
	80	37	33	28	23	17															
	90	32	27	22	16																
100	27	21	16																		
Shut-off PSI		137	129	120	111	103	94	85	77	68	60	38									
5	0								54	52	48	43	38	32	26	17					575
	10							55	54	52	46	41	36	30	22						
	20						55	53	52	50	48	43	38	33	26	18					
	30					55	53	51	50	48	46	41	36	30	23						
	40				55	53	51	49	47	46	44	39	33	27	19						
	50			54	53	51	49	47	45	43	42	36	31	23							
	60		54	52	51	49	47	45	43	41	39	34	27	19							
	70	54	52	50	48	47	45	43	41	39	37	31	24	15							
	80	52	50	48	46	44	43	41	39	36	34	28	20								
	90	50	48	46	44	42	40	38	36	34	31	25	16								
	100	48	46	44	42	40	38	36	34	31	28	21									
	110	45	44	42	40	38	35	33	31	28	25	17									
	120	43	41	39	37	35	33	30	28	25	21										
	130	41	39	37	35	32	30	27	24	21	17										
	140	39	37	34	32	29	27	24	20	17											
	150	36	34	32	29	26	23	20	16												
160	28	25	22	18																	
Shut-off PSI		240	232	223	214	206	197	188	180	171	162	141	119	97	76	54	32				
7.5	0											54	51	47	43	39	35	30	25	20	786
	10										55	52	49	45	41	37	33	28	23	17	
	20								55	54	51	47	44	39	35	30	26	20			
	30							55	54	53	49	46	42	37	33	28	23	17			
	40						55	54	52	51	48	44	40	35	31	26	21	15			
	50					55	53	52	51	49	46	42	38	33	29	24	18				
	60				54	53	52	51	49	48	44	40	36	31	26	21	15				
	70			55	54	53	52	50	49	48	46	42	38	34	29	24	18				
	80		55	54	53	52	50	49	47	46	44	40	36	32	27	21	16				
	90	55	54	53	51	50	49	47	46	44	43	38	34	29	24	19					
	100	54	52	51	50	48	47	45	44	42	41	36	32	27	22	16					
	110	52	51	50	48	47	45	44	42	40	39	34	30	25	19						
	120	51	49	48	47	45	43	42	40	39	37	32	27	22	17						
	130	49	48	46	45	43	42	40	38	37	35	30	25	20							
	140	48	46	45	43	41	40	38	36	34	33	28	23	17							
	150	46	44	43	41	39	38	38	34	32	30	26	20								
160	40	39	37	35	33	31	30	28	26	24	18										
Shut-off PSI		331	323	314	305	297	288	279	271	262	254	232	210	189	167	145	124	102	80	59	



4" HIGH CAPACITY PUMPS - 60 GPM

PERFORMANCE

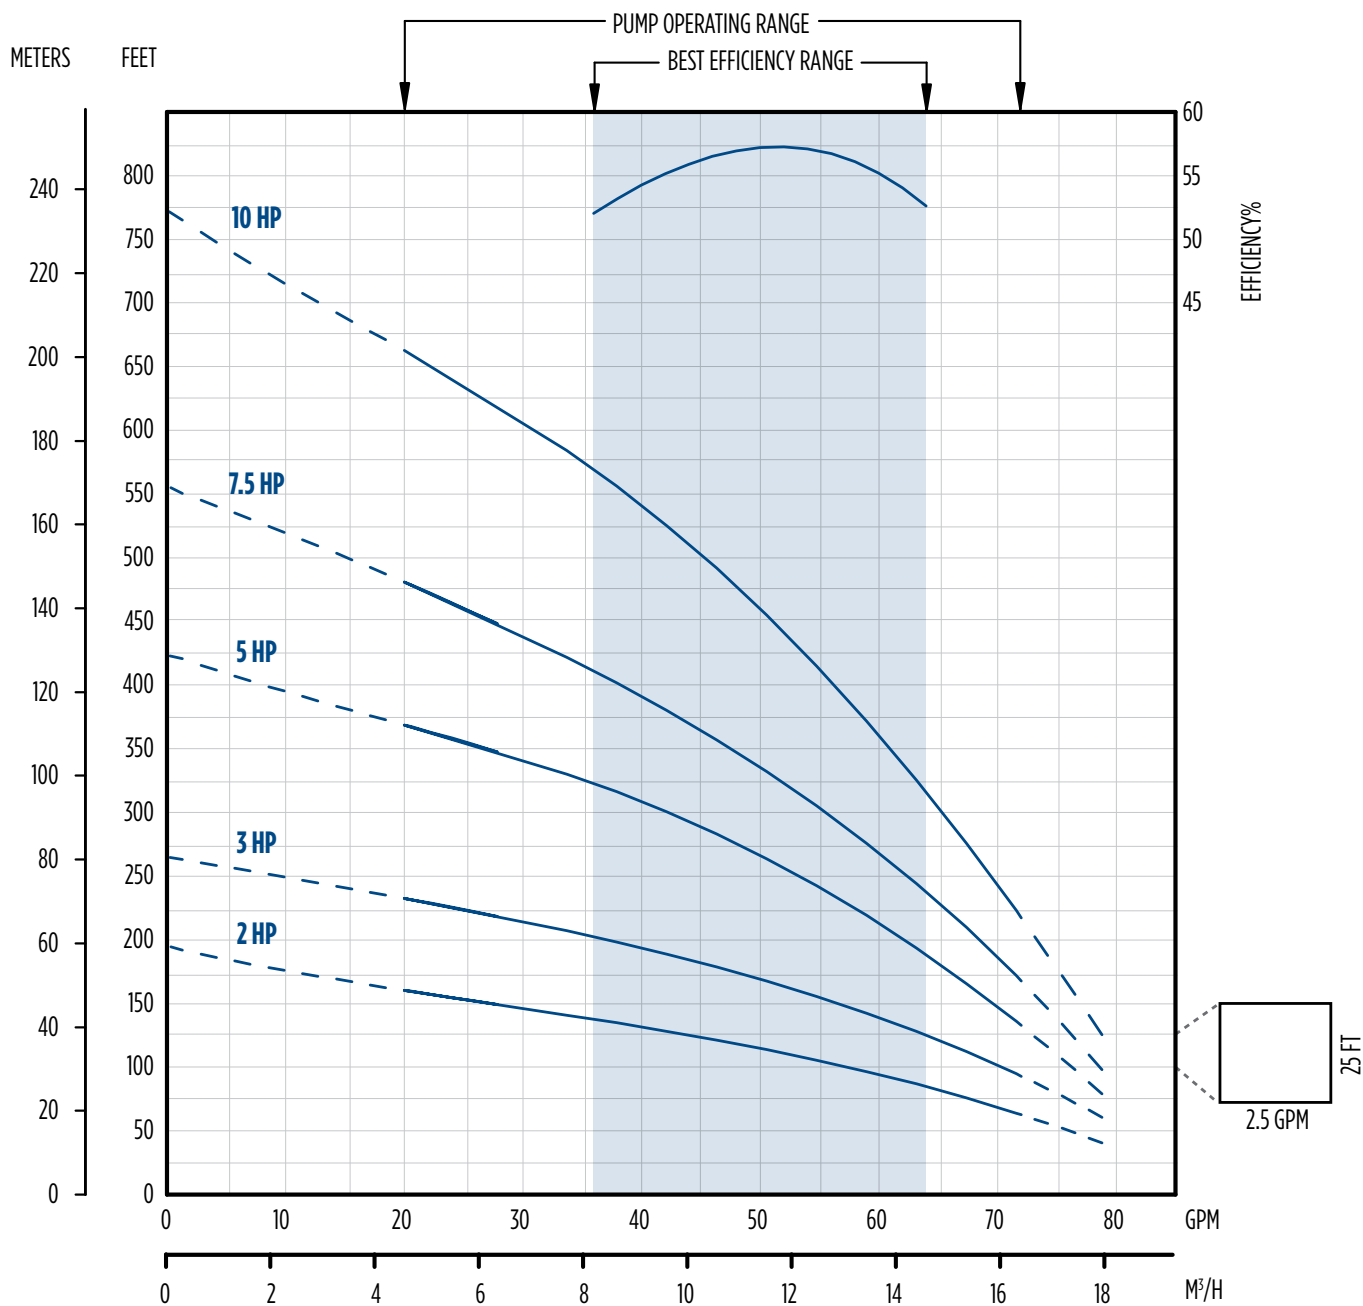

4" HIGH CAPACITY PUMPS - 60 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
2	0				66	57	47	35	21										195
	10			65	56	45	33	18											
	20	71	63	54	43	30													
	30	62	52	41	28														
	40	51	40	26															
	50	38	24																
	60	22																	
Shut-off PSI		76	67	58	50	41	32	24	15										
3	0					70	66	60	53	46	37								265
	10				69	65	59	62	44	35	25								
	20		73	69	64	56	51	43	34	24									
	30	72	68	63	57	50	42	32	22										
	40	67	62	56	49	40	31	20											
	50	61	55	48	39	29													
	60	54	46	37	28														
Shut-off PSI		106	97	89	80	71	63	54	45	37	28								
5	0						71	68	65	62	54	42	27						425
	10						70	68	65	62	59	49	36						
	20					70	67	64	61	58	54	43	28						
	30			72	69	67	64	61	57	54	50	37	20						
	40		72	69	68	63	60	57	53	49	44	29							
	50	71	69	66	63	60	56	53	48	43	38	21							
	60	68	65	62	59	56	52	48	43	37	31								
	70	65	62	59	55	51	47	42	36	30	23								
	80	61	58	55	51	46	41	35	28	21									
	90	58	54	50	45	40	34	27	20										
	100	54	49	45	39	33	26												
Shut-off PSI		175	167	158	149	141	132	123	115	106	97	76	54	32					


HP	PSI	20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	Shut-Off (ft)
7.5	0									71	68	63	56	48	38	27					555
	10							72	70	68	66	59	52	43	33	22					
	20						72	70	68	65	63	56	48	39	28						
	30					72	70	67	65	63	60	53	44	34	23						
	40				71	69	67	65	62	60	57	49	40	29							
	50			71	69	67	64	62	59	56	53	45	35	24							
	60		71	69	66	64	61	59	56	53	49	40	30								
	70	70	68	66	64	61	58	55	52	48	45	36	25								
	80	68	66	63	61	58	55	52	48	45	41	31									
	90	65	63	60	57	54	51	48	44	41	37	26									
	100	62	60	57	54	51	47	44	40	36	32	20									
	110	59	57	53	50	47	43	39	35	31	26										
	120	56	53	50	46	43	39	35	30	26	21										
	130	52	49	46	42	38	34	30	25	20											
	140	49	45	41	37	33	29	24	19												
	150	45	41	37	33	28	24														
	160	31	26	21																	
Shut-off PSI		232	223	214	206	197	188	180	171	162	154	132	110	89	67	45					
10	0											69	65	61	57	51	45	39	31	22	772
	10										71	67	63	59	54	49	42	35	27		
	20								72	71	69	66	61	57	52	46	39	31	23		
	30							72	71	69	68	64	59	55	49	43	36	28			
	40						72	70	69	67	66	62	57	52	46	40	32	24			
	50					72	70	69	67	66	64	60	55	50	43	36	28				
	60				72	70	68	67	65	64	62	58	53	47	40	33	24				
	70			71	70	68	67	65	64	62	60	55	50	44	37	29	20				
	80		71	70	68	66	65	63	62	60	58	53	47	41	33	25					
	90	71	69	68	66	65	63	61	60	58	56	51	44	37	29	21					
	100	69	68	66	64	63	61	59	57	56	53	48	41	34	26						
	110	67	66	64	62	61	59	57	55	53	51	45	38	30	22						
	120	65	64	62	61	59	57	55	53	51	48	42	34	26							
	130	64	62	60	58	57	55	52	51	48	45	39	31	22							
	140	62	60	58	56	54	52	50	48	45	42	35	27								
	150	60	58	56	54	52	50	47	45	42	39	31	23								
	160	53	51	48	46	43	41	38	35	31	28										
Shut-off PSI		326	317	308	300	291	282	274	265	256	248	226	204	183	161	139	118	96	74	53	

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage. Performances for former XP models are the same as 45 gpm models. Performance shown is based on a pump without check valve.



4" HIGH CAPACITY PUMPS - 90 GPM

PERFORMANCE

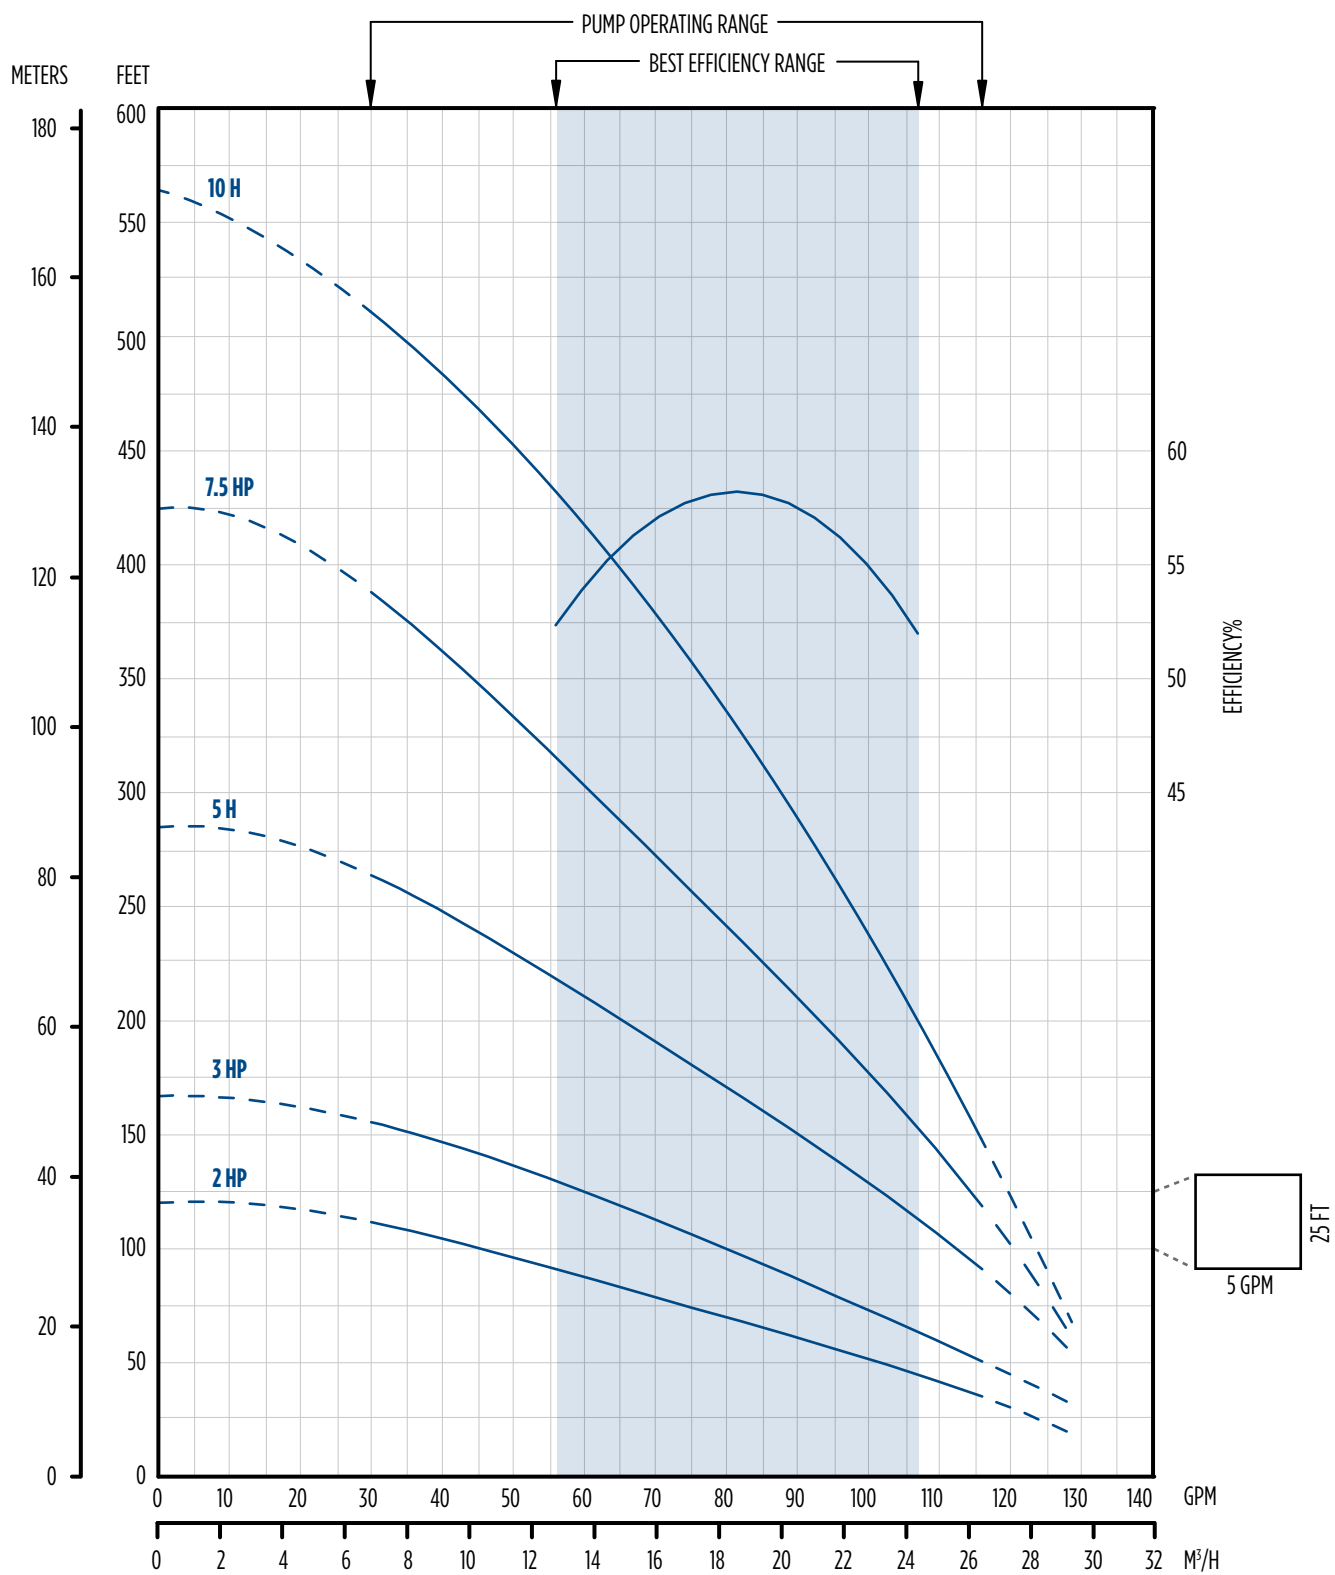

4" HIGH CAPACITY PUMPS - 90 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
2	0		113	92	67	48													120
	10		110	88	64	45													
	20		84	61	40														
	30		58	35															
	40																		
	50																		
	60																		
Shut-off PSI		43	35	26	17	9													
3	0			110	96	79	64	49											167
	10			108	93	76	61	46											
	20		106	90	74	59	43												
	30		88	71	57	39													
	40		69	55	35														
	50		53	30															
	60																		
Shut-off PSI		64	55	46	38	29	20	12											
5	0				113	106	96	85	74	64	41								285
	10				112	104	94	83	72	63	55								
	20				111	103	92	81	71	62	53	44							
	30			110	101	91	80	69	60	52	42								
	40	100	100	89	78	68	59	51	40										
	50	98	87	76	66	58	49	38											
	60	85	75	65	56	48	35												
	70	73	63	55	46	33													
	80	62	54	45	30														
	90	53	43																
	100	41																	
Shut-off PSI		115	106	97	89	80	71	63	54	45	37	15							
7.5	0						116	112	107	101	94	76	60	46					425
	10					115	111	108	100	93	86	68	54	38					
	20				115	110	105	99	92	85	77	61	47						
	30				114	109	104	98	91	83	76	70	55	40					
	40			113	109	103	96	90	82	75	69	62	49						
	50	113	108	102	95	88	81	74	68	61	56	41							
	60	107	101	94	87	80	73	67	61	55	50	31							
	70	100	93	86	79	72	66	60	54	49	42								
	80	92	85	78	71	65	59	53	48	41	33								
	90	84	77	70	64	58	53	47	40	31									
	100	76	69	63	57	52	46	39											
	110	68	62	56	51	45	38												
	120	61	55	50	44	36													
	130	55	49	43	35														
	140	48	42	33															
	150	41	32																
	160																		
Shut-off PSI		175	167	158	149	141	132	123	115	106	97	76	54	32					

HP	PSI	20	40	60	80	100	120	140	160	180	200	240	280	320	360	400	440	480	500	550	600	Shut-Off (ft)
10	0					122	119	116	113	109	106	99	91	83	75	65	54	42	35	11		565
	10				122	119	116	112	109	106	102	95	87	78	69	59	48	34	25			
	20			121	118	115	111	108	105	101	98	90	82	73	64	53	40	24	13			
	30		121	118	115	111	108	104	101	97	94	86	77	68	57	46	31	11				
	40	120	117	114	111	107	104	100	97	93	89	81	72	62	51	38	21					
	50	117	114	110	107	103	100	96	92	88	84	76	66	56	44	29	7					
	60	113	110	106	103	99	96	92	88	84	79	70	60	49	35	18						
	70	109	106	102	99	95	91	87	83	79	74	65	54	41	26	2						
	80	105	102	98	94	91	87	82	78	74	69	59	47	33	14							
Shut-off PSI		236	227	219	210	201	193	184	175	167	158	141	123	106	89	71	54	37	28	6		

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage. Performance shown is based on a pump without check valve.

6" HIGH CAPACITY PUMPS

Ideal for farm, home, irrigation, industry, municipal, and commercial applications, equipped with the power, performance, and reliability you expect from Franklin Electric.

Flow ratings of 50, 75, 100, and 125 gpm with TDH up to 1200 ft

Horsepower ranges from 1-1/2 to 40 hp.

FEATURES

- Heavy-duty stainless steel discharge head and motor bracket
- Stainless steel shaft, shell, intake screen, and cable guard provides corrosion resistance and longer pump life
- Glass-filled modified PPO impeller stage assemblies provide exceptional strength and durability
- Ceramic shaft sleeve and rubber discharge bearing minimizes bearing wear and shaft misalignment
- 3" NPT heavy-duty stainless steel discharge head
- Modular motor bracket enabling 4" or 6" motor mount for 5-10 hp units



6" HIGH CAPACITY PUMPS - ORDERING INFORMATION

ORDERING INFORMATION


6" Pump Ends							
GPM	HP	Stages	Motor Fit	Ordering Info.		Dimensions (in)	Wt. (lbs)
				Model	Order	Pump End Only	
50	1.5	3	4"	50LD1S6-PE	94805003	13.51	30
	2	4	4"	50LD2S6-PE	94805004	15.13	31
	3	5	4"	50LD3S6-PE	94805005	16.76	32
	5	8	4" & 6"	50LD5S6-PE	94805008	21.63	36
	7.5	11	4" & 6"	50LD7S6-PE	94805011	26.51	40
	10	15	4" & 6"	50LD10S6-PE	94805015	32.94	46
	15	22	4" & 6"	50LD15S6-PE	94805022	47.64	54
75	3	3	4"	75LD3S6-PE	94807503	13.51	30
	5	5	4" & 6"	75LD5S6-PE	94807505	16.76	32
	7.5	7	4" & 6"	75LD7S6-PE	94807507	20.01	35
	10	9	4" & 6"	75LD10S6-PE	94807509	23.26	38
	15	13	6"	75LD15S6-PE	94807513	29.76	43
	20	17	6"	75LD20S6-PE	94807517	36.19	48
	25	23	6"	75LD25S6-PE	94807523	46.00	54
100	5	3	4" & 6"	100LD5S6-PE	94800003	14.62	30
	7.5	5	4" & 6"	100LD7S6-PE	94800005	18.51	32
	10	6	4" & 6"	100LD10S6-PE	94800006	20.49	34
	15	9	6"	100LD15S6-PE	94800009	26.31	38
	20	13	6"	100LD20S6-PE	94800013	34.07	43
	25	16	6"	100LD25S6-PE	94800016	39.94	47
	30	20	6"	100LD30S6-PE	94800020	47.64	54
125	5	2	4" & 6"	125LD5S6-PE	94802502	12.94	29
	7.5	3	4" & 6"	125LD7S6-PE	94802503	15.05	30
	10	4	4" & 6"	125LD10S6-PE	94802504	17.13	31
	15	7	6"	125LD15S6-PE	94802507	23.37	35
	20	9	6"	125LD20S6-PE	94802509	27.54	38
	25	11	6"	125LD25S6-PE	94802511	31.70	40
	30	13	6"	125LD30S6-PE	94802513	35.87	43
	40	18	6"	125LD40S6-PE	94802518	46.27	48

NOTES: Discharge is 3" NPT. Maximum diameter across cable guard is 5.50" on all models.



6" HIGH CAPACITY PUMPS - 50 GPM

PERFORMANCE

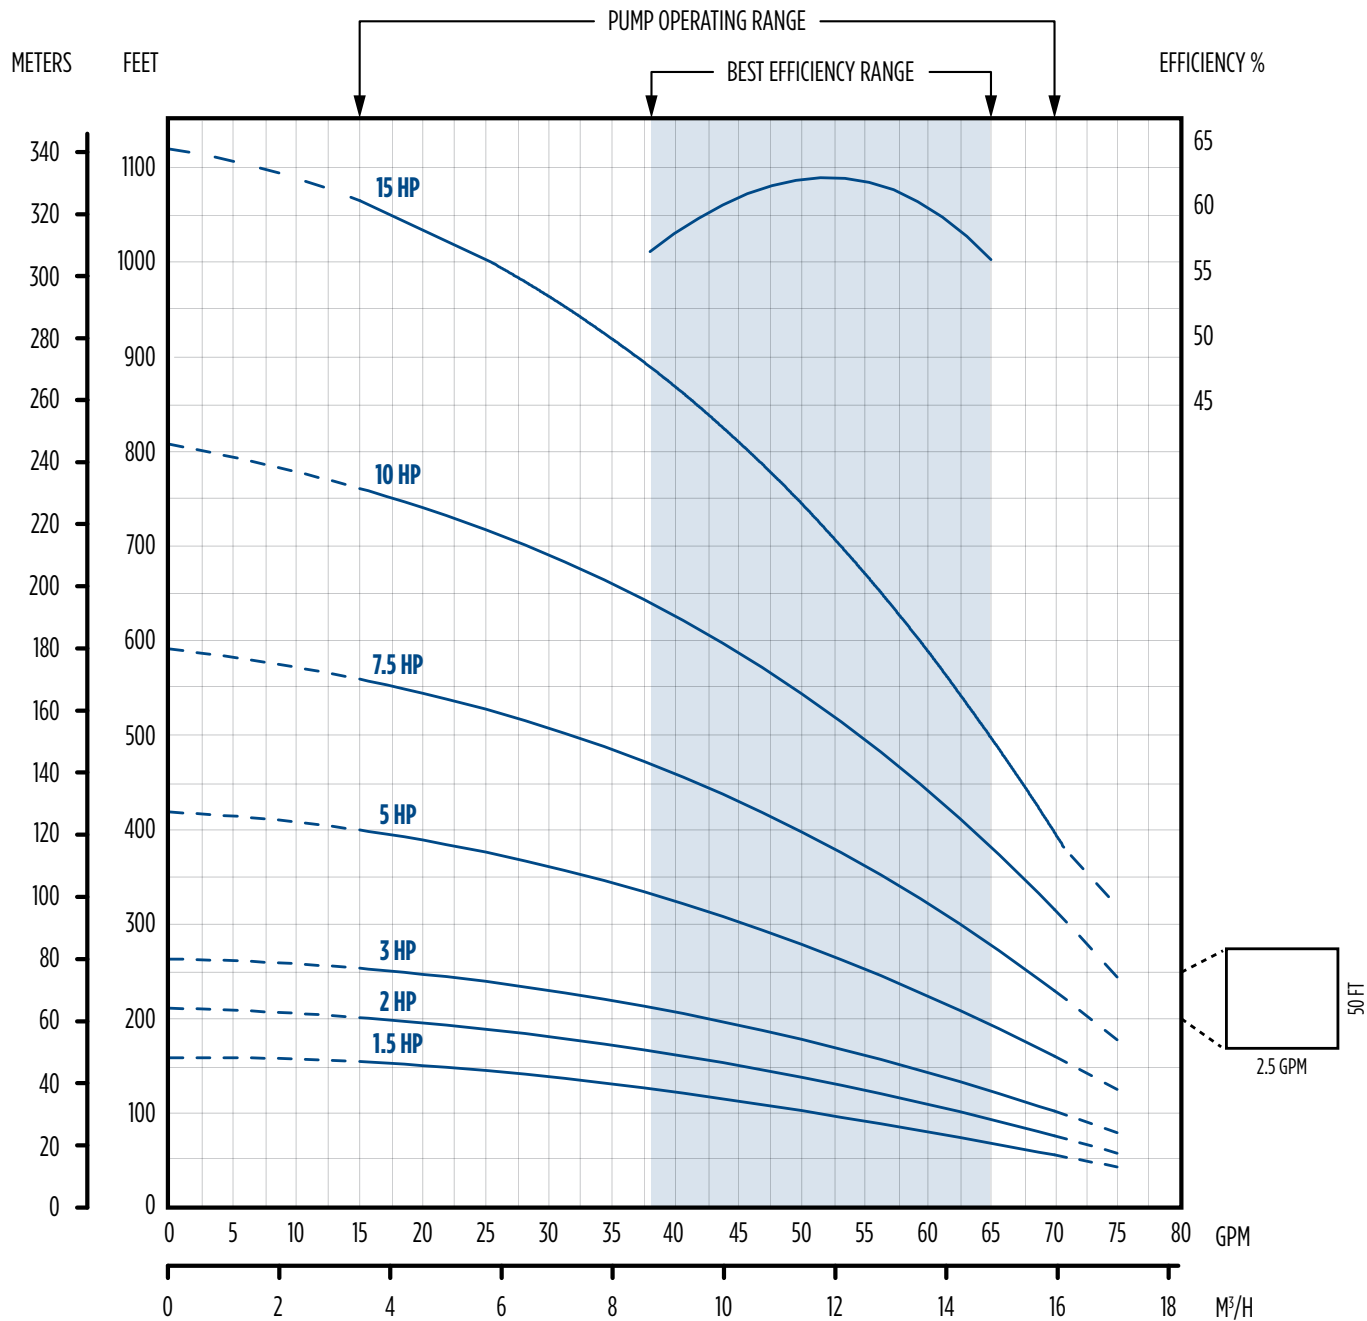

6" HIGH CAPACITY PUMPS - 50 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																		Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550		
1.5	0			68	61	51	41	30											158	
	20	66	58	47	38	25														
	30	56	46	37	21															
	40	44	35	16																
	50	33																		
Shut-off PSI		60	51	43	34	25	17	8												
2	0				69	63	57	49	41	31	16								211	
	20		67	62	54	46	38	27												
	30	67	60	53	45	37	25													
	40	59	52	44	35	23														
	50	51	42	34	20															
Shut-off PSI		83	74	65	57	48	39	31	22	13	5									
3	0					70	66	61	55	49	42	17							263	
	20				69	65	60	53	47	40	33	21								
	30		68	64	59	52	46	39	31	18										
	40	68	63	58	51	45	38	30	15											
	50	63	57	50	44	37	28													
Shut-off PSI		105	97	88	79	71	62	53	45	36	27	6								
5	0								70	67	64	55	45	34					418	
	20							69	66	63	60	56	46	35	16					
	30						69	66	63	59	56	51	41	28						
	40				68	66	62	59	55	51	47	36	18							
	50		70	68	65	62	58	54	50	46	42	29								
Shut-off PSI		173	164	155	147	138	129	121	112	103	95	73	51	30						
7.5	0											68	63	57	49	42	32	18	591	
	20										70	68	63	57	50	42	33	19		
	30									70	68	66	60	54	47	38	27			
	40								70	68	66	64	58	51	43	34	21			
	50							69	67	65	63	61	54	47	39	28				
Shut-off PSI		247	239	230	221	213	204	195	187	178	169	148	126	104	83	61	39	18		

HP	PSI	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	700	750	
10	0									68	64	59	54	49	43	37	28	18	808
	20								68	64	60	55	50	44	37	29	19		
	30							70	66	62	57	52	47	41	34	25			
	40								68	64	60	55	50	44	38	30	20		
	50						70	66	62	58	53	47	41	34	26				
Shut-off PSI		306	298	289	281	272	263	242	220	198	177	155	133	112	90	68	47	25	


HP	PSI	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	650	700	750	800	Shut-Off (ft)
15	0								80	78	76	74	72	70	68	65	62	59	56	53	49	46	1129
	20						79	78	77	76	74	72	70	68	65	62	59	56	53	50	46	42	
	40			80	79	78	77	76	75	74	72	70	68	65	63	60	57	53	50	46	43	38	
	60	80	78	77	76	75	74	73	72	71	70	68	66	63	60	57	54	50	47	43	39	34	
	80	77	76	75	75	74	73	72	71	70	69	68	66	63	60	57	54	50	47	43	39	34	
	100	75	74	73	73	72	71	70	69	68	66	63	60	57	54	51	47	43	39	35	29	22	
	120	73	72	72	71	70	69	68	67	66	64	61	58	54	51	47	44	40	35	30	23	14	
	140	71	71	70	69	68	67	66	65	64	61	58	55	51	48	44	40	36	30	23	14	3	
Shut-off PSI									411	402	380	359	337	315	294	272	250	229	207	186	164	142	

NOTES: Discharge 3" NPT; Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage



6" HIGH CAPACITY PUMPS - 75 GPM

PERFORMANCE

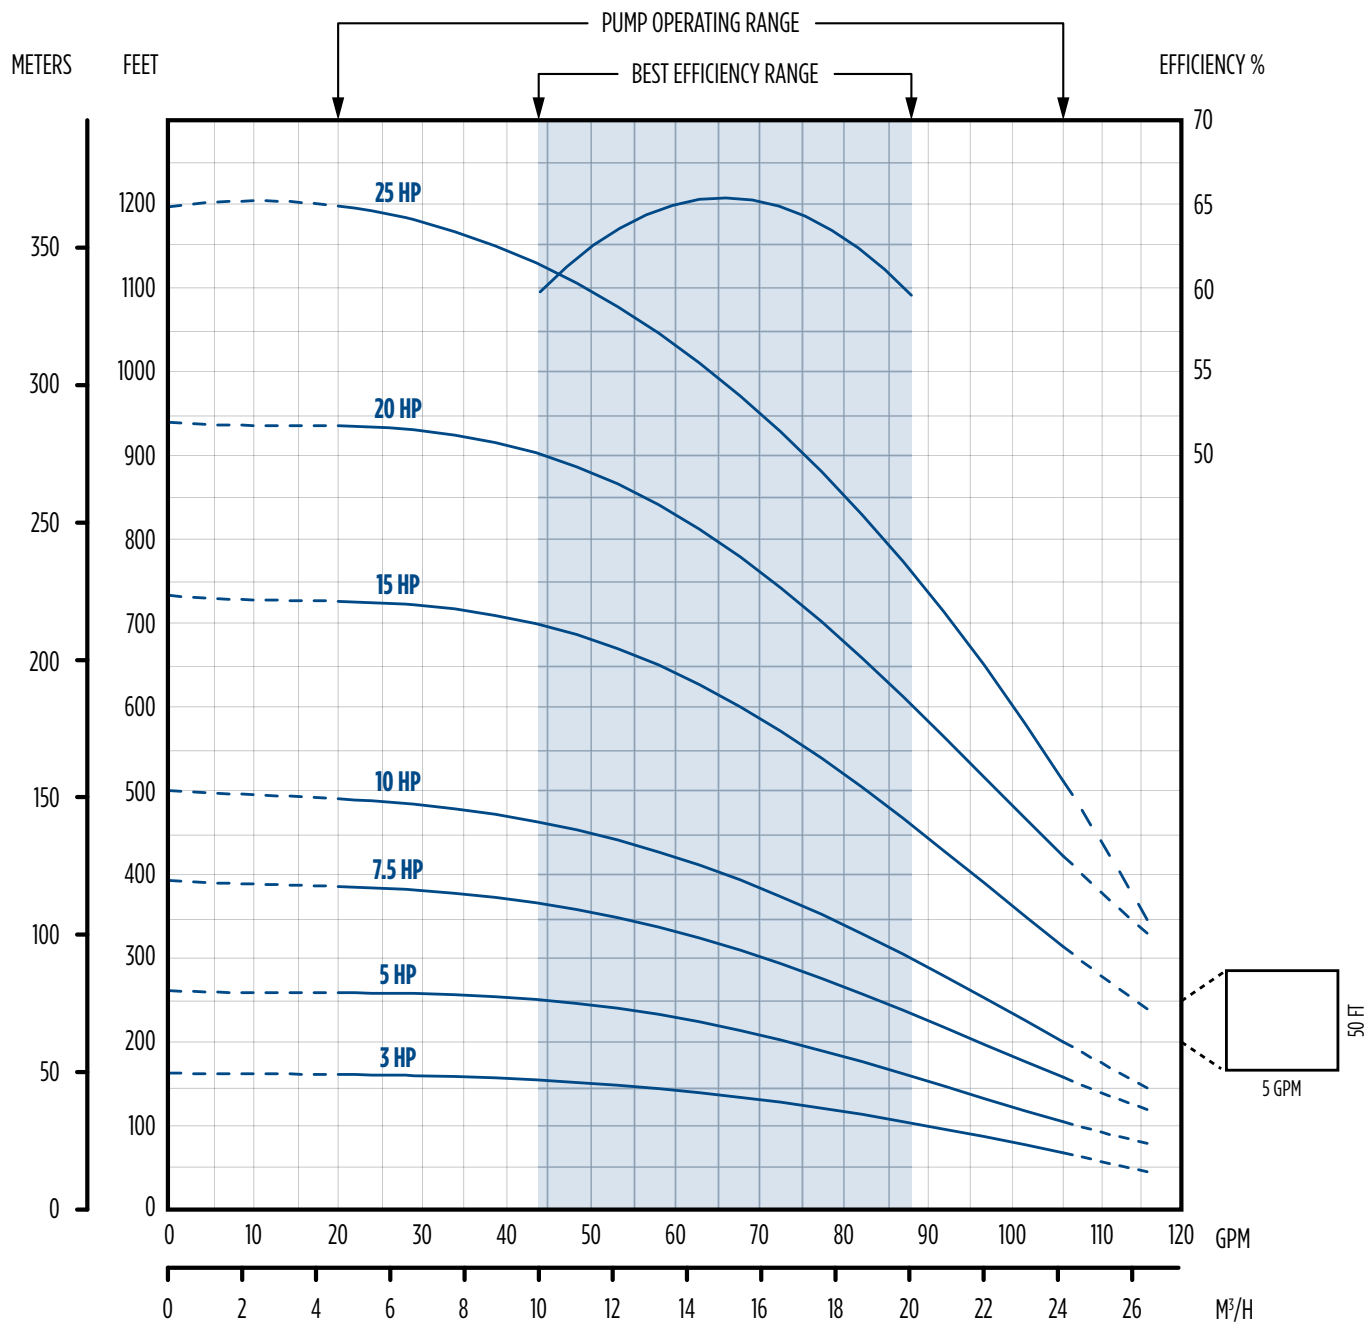

6" HIGH CAPACITY PUMPS - 75 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
3	0			108	101	89	77	64	26										162
	20	106	98	85	73	57													
	30	96	83	72	53														
	40	81	70	47															
	50	68	40																
Shut-off PSI		61	53	44	35	27	18	9	1										
5	0				116	106	102	96	88	79	73	41							259
	20		112	105	100	93	85	77	71	64	47								
	30	110	104	99	92	84	76	70	63	43									
	40	103	98	91	82	75	69	61	37										
	50	97	89	81	74	68	58	31											
Shut-off PSI		103	95	86	77	69	60	51	43	34	25	4							
7.5	0						116	109	105	101	97	83	70	54					387
	20				114	108	104	100	96	90	85	71	56						
	30			112	107	103	99	95	89	84	78	65	40						
	40		111	106	103	99	94	88	83	77	72	57							
	50	111	106	102	98	93	88	82	76	71	66	43							
Shut-off PSI		159	150	142	133	124	116	107	98	90	81	59	38	16					
10	0									112	109	106	98	88	77	66	50		493
	20					116	111	108	105	102	99	89	78	67	52				
	30				115	111	107	104	101	98	94	84	73	61	39				
	40			114	110	107	104	101	98	94	89	78	68	54	18				
	50		114	109	106	104	100	97	93	89	84	74	63	42					
Shut-off PSI		205	196	187	179	170	161	153	144	135	127	105	84	62	40	19			

HP	PSI	120	140	160	180	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	Shut-Off (ft)
15	0						114	107	102	97	89	81	74	68	60	41						727
	20					115	107	103	97	90	82	75	69	61	43							
	30				114	110	105	100	94	86	78	72	66	55	28							
	40			113	110	107	103	98	90	82	75	69	62	45								
	50		113	109	107	105	101	95	87	79	73	66	56	31								
	60	112	109	107	105	103	98	91	83	76	70	63	47									
Shut-off PSI		263	254	245	237	228	206	185	163	142	120	98	77	55	33	12						
20	0								113	107	103	100	94	88	82	76	71	66	58	43		936
	20								113	107	104	100	95	89	82	76	72	67	59	44		
	30							110	106	102	98	92	86	79	74	69	64	54	33			
	40						114	108	104	100	95	89	83	77	72	67	60	46				
	50						110	106	102	98	93	86	80	74	70	64	55	35				
	60						115	108	104	101	96	90	83	77	72	67	61	47				
Shut-off PSI		353	345	336	327	319	297	275	254	232	210	189	167	145	124	102	80	59	37	15		


HP	PSI	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	
25	0			116	112	109	107	104	101	97	93	89	84	79	75	70	65	59	50	38	19	1202
	20		116	112	109	107	104	101	98	93	89	84	80	75	70	65	59	51	39	21		
	30		114	111	108	106	103	100	96	91	87	82	78	73	68	63	56	46	31			
	40		112	109	107	104	101	98	94	89	85	80	75	71	66	60	51	40	23			
	50	114	111	108	106	103	100	96	92	87	83	78	73	69	63	56	47	33				
	60	113	110	107	105	102	98	94	90	85	80	76	71	66	60	52	41	24				
Shut-off PSI		412	391	369	347	326	304	283	261	239	218	196	174	153	131	109	88	66	44	23	1	

NOTES: Discharge 3" NPT; Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage



6" HIGH CAPACITY PUMPS - 100 GPM

PERFORMANCE

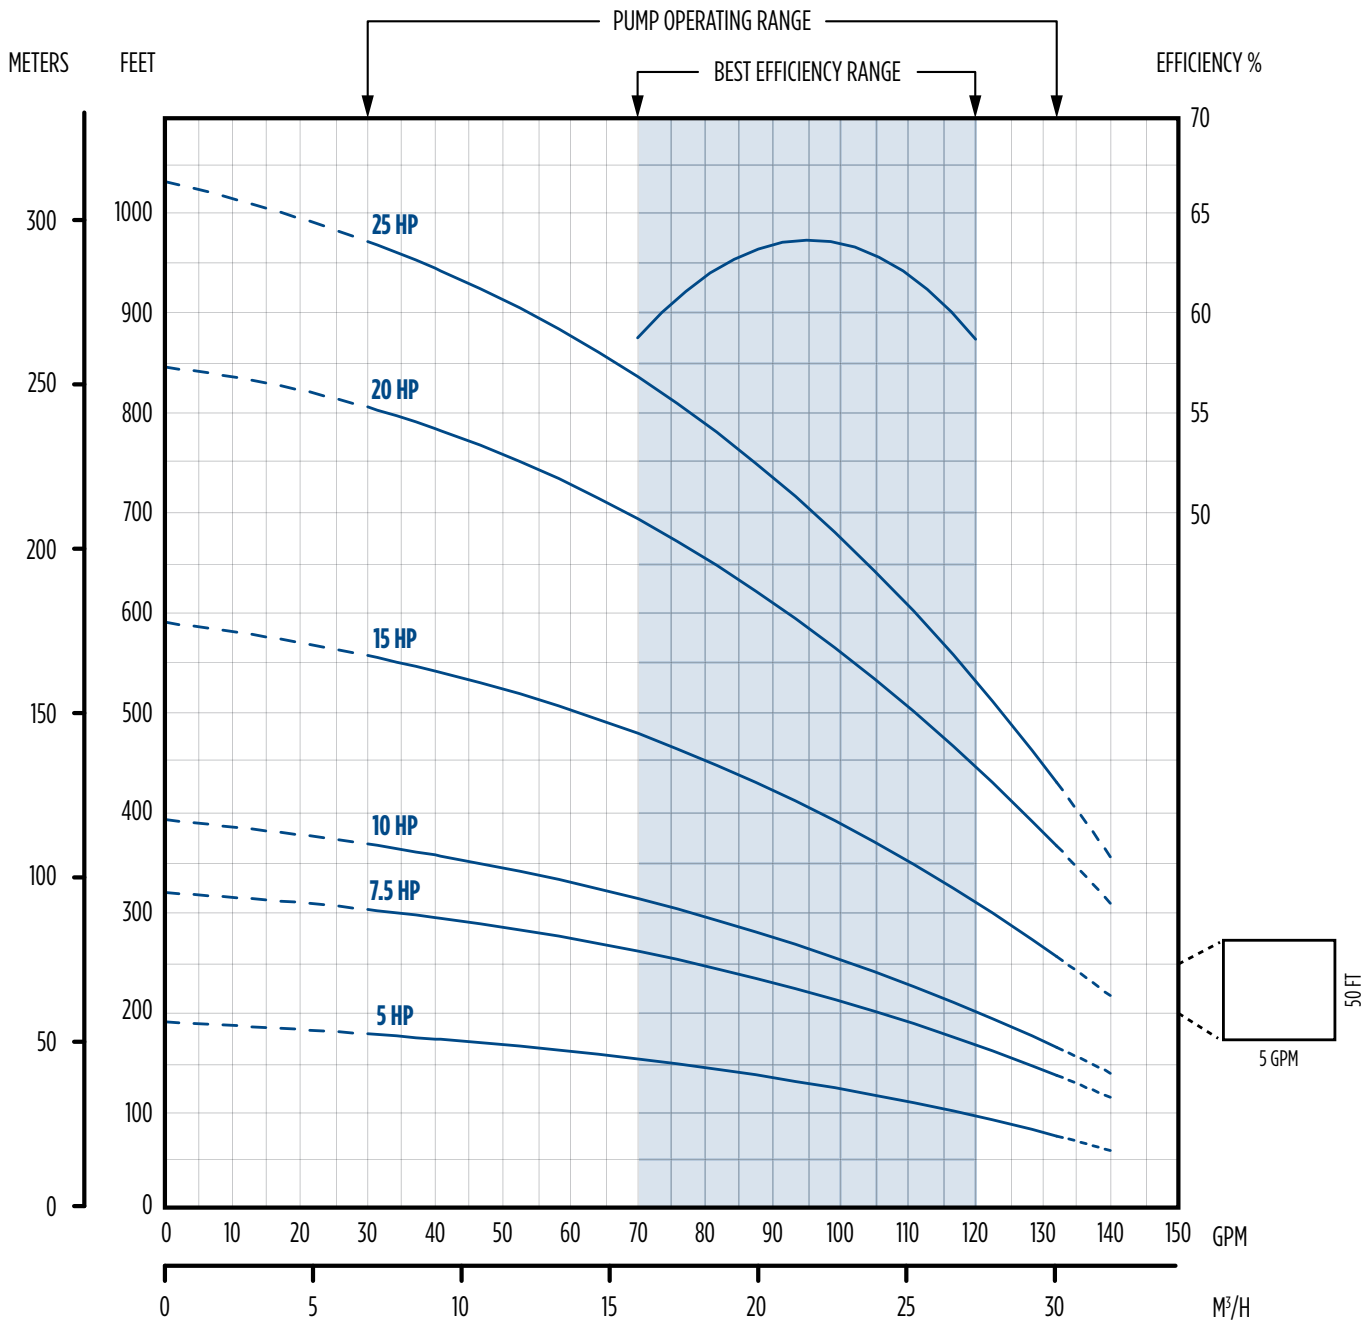

6" HIGH CAPACITY PUMPS - 100 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
5	0				130	119	104	85	62										191
	20		127	115	98	78	54												
	30	125	112	95	75	49													
	40	110	92	71	44														
	50	89	68	38															
	60	64	32																
Shut-off PSI		74	65	57	48	39	31	22	13										
7.5	0						131	123	115	107	79	32							320
	20					129	121	113	104	93	82	37							
	30				127	120	111	102	92	79	64								
	40			126	118	110	101	90	77	62	42								
	50		125	117	109	99	88	75	59	38									
	60	124	116	107	97	86	73	56	34										
Shut-off PSI		130	121	113	104	95	87	78	69	61	52	30	9						
10	0									127	121	102	79	45					1393
	20						132	125	118	111	104	81	48						
	30					131	124	117	110	102	94	67	28						
	40				130	123	116	109	101	92	83	51							
	50			129	122	115	108	100	91	81	70	31							
	60		128	121	114	107	99	90	79	68	54								
Shut-off PSI		161	153	144	135	127	118	110	101	92	84	62	40	19					
15	0											123	111	98	82	61	32		590
	20											123	112	99	83	62	34		
	30										129	118	107	93	74	51			
	40							132	128	124	113	101	85	64	37				
	50						132	128	124	119	108	94	76	53					
	60					131	127	123	119	114	102	86	66	39					
Shut-off PSI		247	238	229	221	212	204	195	186	178	169	147	126	104	82	61	39	17	


HP	PSI	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	Shut-Off (ft)
20	0					127	119	111	103	94	82	69	52						846
	20				127	120	112	104	94	83	70	53	31						
	30			131	124	116	108	99	89	78	63	44							
	40			128	120	112	104	95	84	71	55	33							
	50		132	124	117	109	100	90	79	64	45								
	60		128	121	113	105	96	85	72	56	35								
Shut-off PSI		280	258	236	215	193	172	150	128	107	85	63	42						
25	0						130	124	118	111	104	96	87	78	67	53	37		1030
	20					130	124	118	112	105	97	88	79	68	55	39			
	30					128	122	116	109	101	93	84	74	62	48	30			
	40				130	125	119	112	105	97	89	79	68	56	40				
	50				128	122	116	109	102	94	85	75	63	49	31				
	60			131	125	119	113	106	98	90	80	69	57	41					
Shut-off PSI		359	338	316	294	273	251	229	208	186	164	143	121	99					

NOTES: Discharge 3" NPT; Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage



6" HIGH CAPACITY PUMPS - 125 GPM

PERFORMANCE

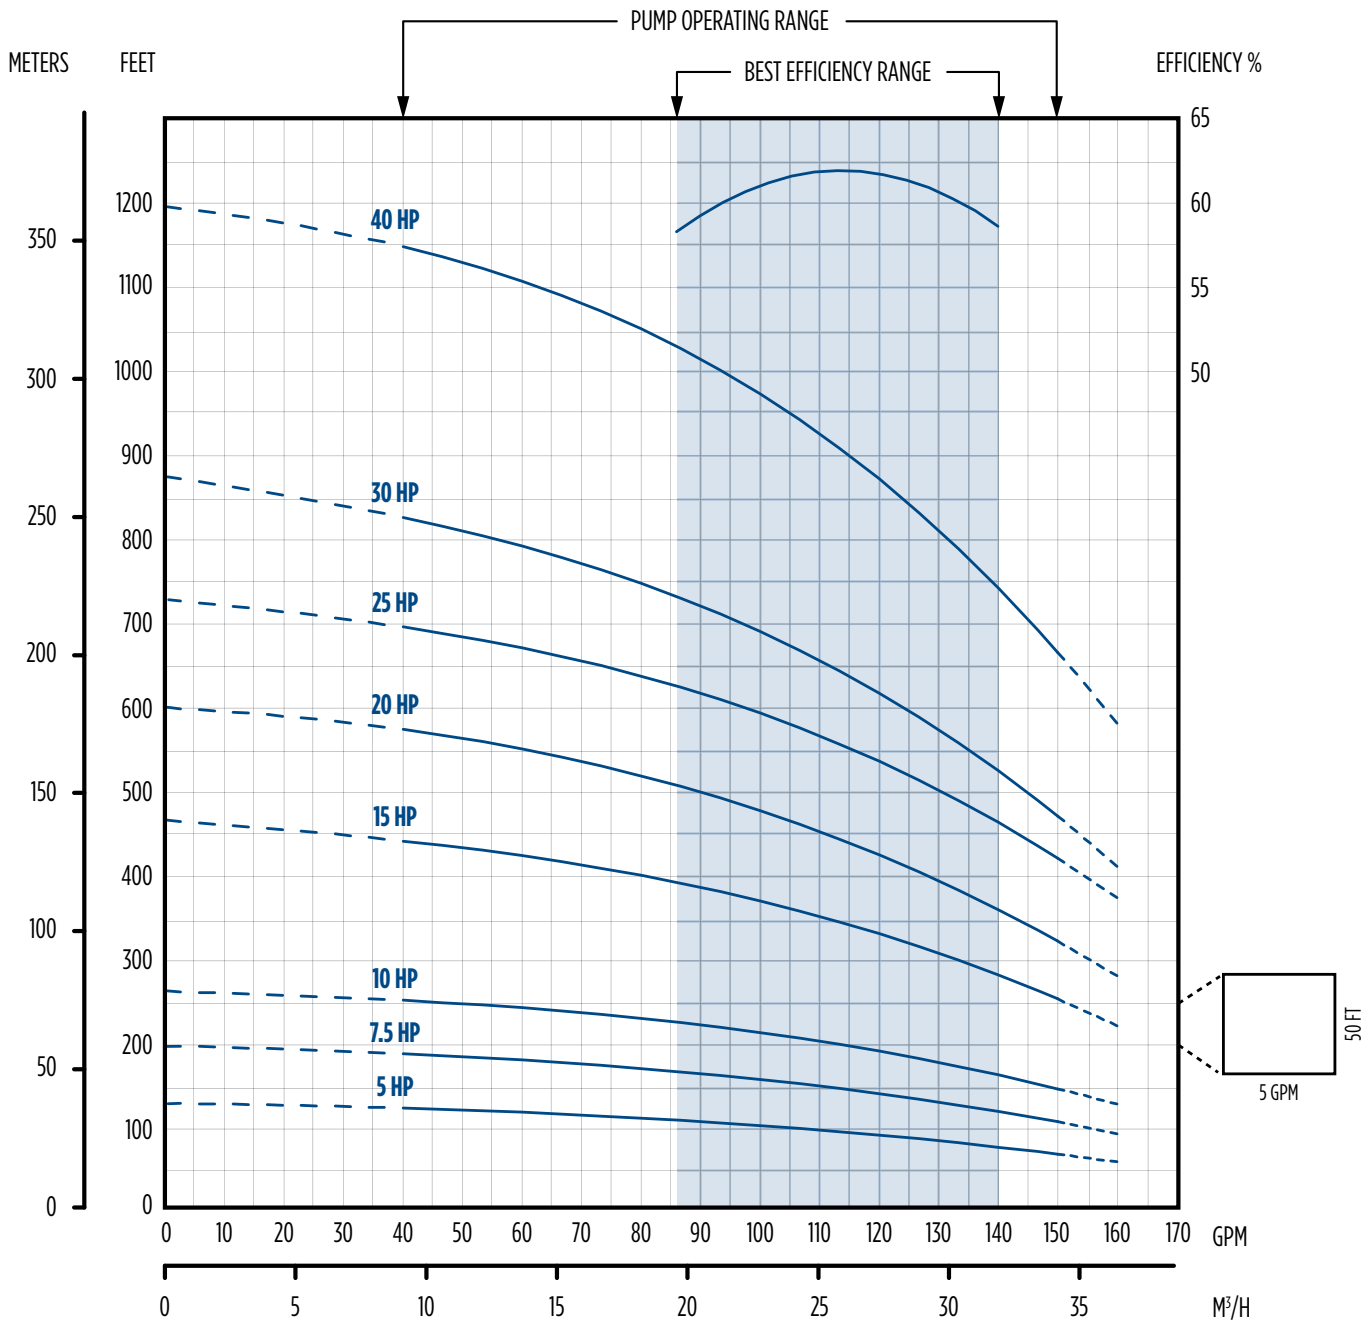

6" HIGH CAPACITY PUMPS - 125 GPM

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																		Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600	
5	0				140	106	62													130
	20		131	94																
	30	126	88																	
	40	82																		
Shut-off PSI		48	39	30	22	13	4													
7.5	0						141	122	99	64										198
	20				135	116	90	48												
	30		150	133	112	85														
	40	147	130	109	79															
	50	127	105	73																
	60	101	67																	
	70	60																		
Shut-off PSI		77	69	60	51	43	34	25	17	8										
10	0						139	125	143	129	114	45								263
	20						109	88	109	88	54									
	30				149	137	122	106	84	47										
	40			148	135	120	103	79												
	50		146	132	118	100	74													
	60	144	130	115	97	69														
	70	128	112	93	63															
Shut-off PSI		105	97	88	79	71	62	53	45	36	27	6								
15	0												134	112	81					467
	20											135	114	84						
	30										145	126	101	65						
	40								144	137	116	87								
	50						149	143	136	128	104	68								
	60					148	142	134	126	117	89	44								
	70					147	141	133	125	116	106	72								
Shut-off PSI			185	176	168	159	150	142	133	124	116	94	72	51	29					
20	0												143	129	113	91	59			601
	20												144	130	114	93	62			
	30											138	123	105	81	41				
	40											145	131	115	95	65				
	50											139	124	107	83	45				
	60										146	132	117	97	68					
	70							150	145	140	125	108	85	49						
Shut-off PSI		252	243	234	226	217	208	200	191	182	174	152	130	109	87	65	44	22		
25	0														143	133	119	99	71	734
	20														144	134	120	101	74	
	30														149	140	128	112	90	
	40														145	135	121	103	76	
	50													150	140	129	114	92	60	
	60													146	135	123	104	78	42	
	70													141	130	115	94	63		
Shut-off PSI				292	283	275	266	257	249	240	231	210	188	166	145	123	101	80	58	37

HP	PSI	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	Shut-Off (ft)
30	0						143	134	125	113	99	79	54						873
	20					144	135	126	114	100	81	56							
	30				149	140	131	121	108	92	70	43							
	40				145	136	126	115	101	83	58								
	50			149	141	132	122	109	93	72	45								
	60			145	136	127	116	102	84	60									
	70		150	141	132	122	110	95	74	47									
Shut-off PSI		270	248	226	205	183	161	140	118	96	75	53	31						
40	0									150	144	138	132	125	117	107	95	80	1194
	20								150	145	139	132	126	118	1108	96	82	62	
	30								148	142	136	129	122	114	103	90	73	52	
	40								145	139	133	126	118	109	97	83	64	40	
	50							148	142	136	130	123	114	104	91	75	53		
	60							145	139	133	127	119	110	98	84	66	42		
	70						149	143	137	130	123	115	105	92	76	55			
Shut-off PSI		409	387	365	344	322	300	279	257	235	214	192	170						

NOTES: Discharge 3" NPT; Performance shown does not include friction loss in the drop pipe; All performance data is based on rated motor nameplate voltage

E SERIES ENVIRONMENTAL PUMPS

APPLICATIONS

- Filtered effluent service
- Aeration
- Ornamental fountains/waterfalls

FEATURES

- Ideal for effluent pumping applications
- Stainless steel or thermoplastic discharge and motor bracket are tough and non-corrosive. Both materials are highly resistant to damage by minerals, metals, and other substances typically found in water
- Heavy-duty, 300 V, 10' SJ00W motor leads
- Ceramic bearing sleeve has time-proven durability for years of reliable service
- Hex rubber bearing has extra large surface assuring shaft stability and multiple flow channels keeping particles away from bearing surfaces
- Proven hydraulic staging allows close tolerances and increased performance
- Carbon phenolic upthrust washer prevents excessive wear in severe applications
- Removable built-in check valve on 10-20 gpm pumps. No built-in check valves on high capacity pumps
- Powered by a Franklin Electric submersible motor



E SERIES ENVIRONMENTAL PUMPS - ORDERING INFORMATION

THERMOPLASTIC ORDERING INFORMATION

1/2 - 1.5 HP Single-Phase Units						
GPM	HP	Volt	Wire	Order	Model	Wt. (lbs)
10	1/2	115	2	94701005	10LE05P4-2W115	25
	1/2	230	2	94701010	10LE05P4-2W230	25
	3/4	230	2	94701015	10LE07P4-2W230	29
	1	230	2	94701020	10LE1P4-2W230	33
	1.5	230	2	94701025	10LE15P4-2W230	41
20	1/2	115	2	94702005	20LE05P4-2W115	24
	1/2	230	2	94702010	20LE05P4-2W230	24
	3/4	230	2	94702015	20LE07P4-2W230	28
	1	230	2	94702020	20LE1P4-2W230	31
	1.5	230	2	94702025	20LE15P4-2W230	39

NOTES: Discharge is 1-1/4" NPT. Maximum diameter across cable guard is 3.90" on all models.

1/2 - 2 HP Pump Ends						
GPM	HP	Volt	Wire	Order	Model	Wt. (lbs)
10	1/2	N/A	2	94711005	10LE05P4-PE	7
	3/4	N/A	N/A	10LE07P4-PE	10LE07P4-PE	8
	1	N/A	N/A	10LE1P4-PE	10LE1P4-PE	9
	1.5	N/A	N/A	10LE15P4-PE	10LE15P4-PE	10
20	1/2	N/A	N/A	20LE05P4-PE	20LE05P4-PE	6
	3/4	N/A	N/A	20LE07P4-PE	20LE07P4-PE	6
	1	N/A	N/A	20LE1P4-PE	20LE1P4-PE	7
	1.5	N/A	N/A	20LE15P4-PE	20LE15P4-PE	8
	2	N/A	N/A	20LE2P4-PE	20LE2P4-PE	9

STAINLESS STEEL ORDERING INFORMATION

1/2 - 1.5 HP Single-Phase Units						
GPM	HP	Volt	Wire	Order	Model	Wt. (lbs)
35	1/2	115	2	94703505	35LE05S4-2W115	25
	1/2	230	2	94703510	35LE05S4-2W230	25
	3/4	230	2	94703515	35LE07S4-2W230	29
	1	230	2	94703520	35LE1S4-2W230	33
	1.5	230	2	94703525	35LE15S4-2W230	39
45	1/2	115	2	94704505	45LE05S4-2W115	28
	1/2	230	2	94704510	45LE05S4-2W230	28
	3/4	230	2	94704515	45LE07S4-2W230	33
	1	230	2	94704520	45LE1S4-2W230	36
	1.5	230	2	94704525	45LE15S4-2W230	44
60	1/2	115	2	94706005	60LE05S4-2W115	29
	1/2	230	2	94706010	60LE05S4-2W230	29
	3/4	230	2	94706015	60LE07S4-2W230	33
	1	230	2	94706020	60LE1S4-2W230	37
	1.5	230	2	94706025	60LE15S4-2W230	45
90	1.5	230	2	94709025	90LE15S4-2W230	44

PUMP ENDS ORDERING INFORMATION


1/2 - 3 HP Pump Ends				
GPM	HP	Order	Model	Wt. (lbs)
35	1/2	94713505	35LE05S4-PE	7
	3/4	94713510	35LE07S4-PE	8
	1	94713515	35LE1S4-PE	9
	1.5	94713520	35LE15S4-PE	10
	2	94713525	35LE2P4-PE	11
	3	94713530	35LE3P4-PE	12
45	1/2	94714505	45LE05S4-PE	10
	3/4	94714510	45LE07S4-PE	11
	1	94714515	45LE1S4-PE	12
	1.5	94714520	45LE15S4-PE	15
	2	94714525	45LE2P4-PE	16
	3	94714530	45LE3P4-PE	19
60	1/2	94716005	60LE05S4-PE	11
	3/4	94716010	60LE07S4-PE	12
	1	94716015	60LE1S4-PE	13
	1.5	94716020	60LE15S4-PE	14
	2	94716025	60LE2S4-PE	15
	3	94716030	60LE3S4-PE	17
90	1.5	94719020	90LE15S4-PE	15
	2	94719025	90LE2S4-PE	15
	3	94719030	90LE3S4-PE	17

NOTES: Discharge is 2" NPT with no built in check valve. Maximum diameter across cable guard is 3.90" on all models.



E SERIES ENVIRONMENTAL PUMPS - 10 GPM THERMOPLASTIC

PERFORMANCE

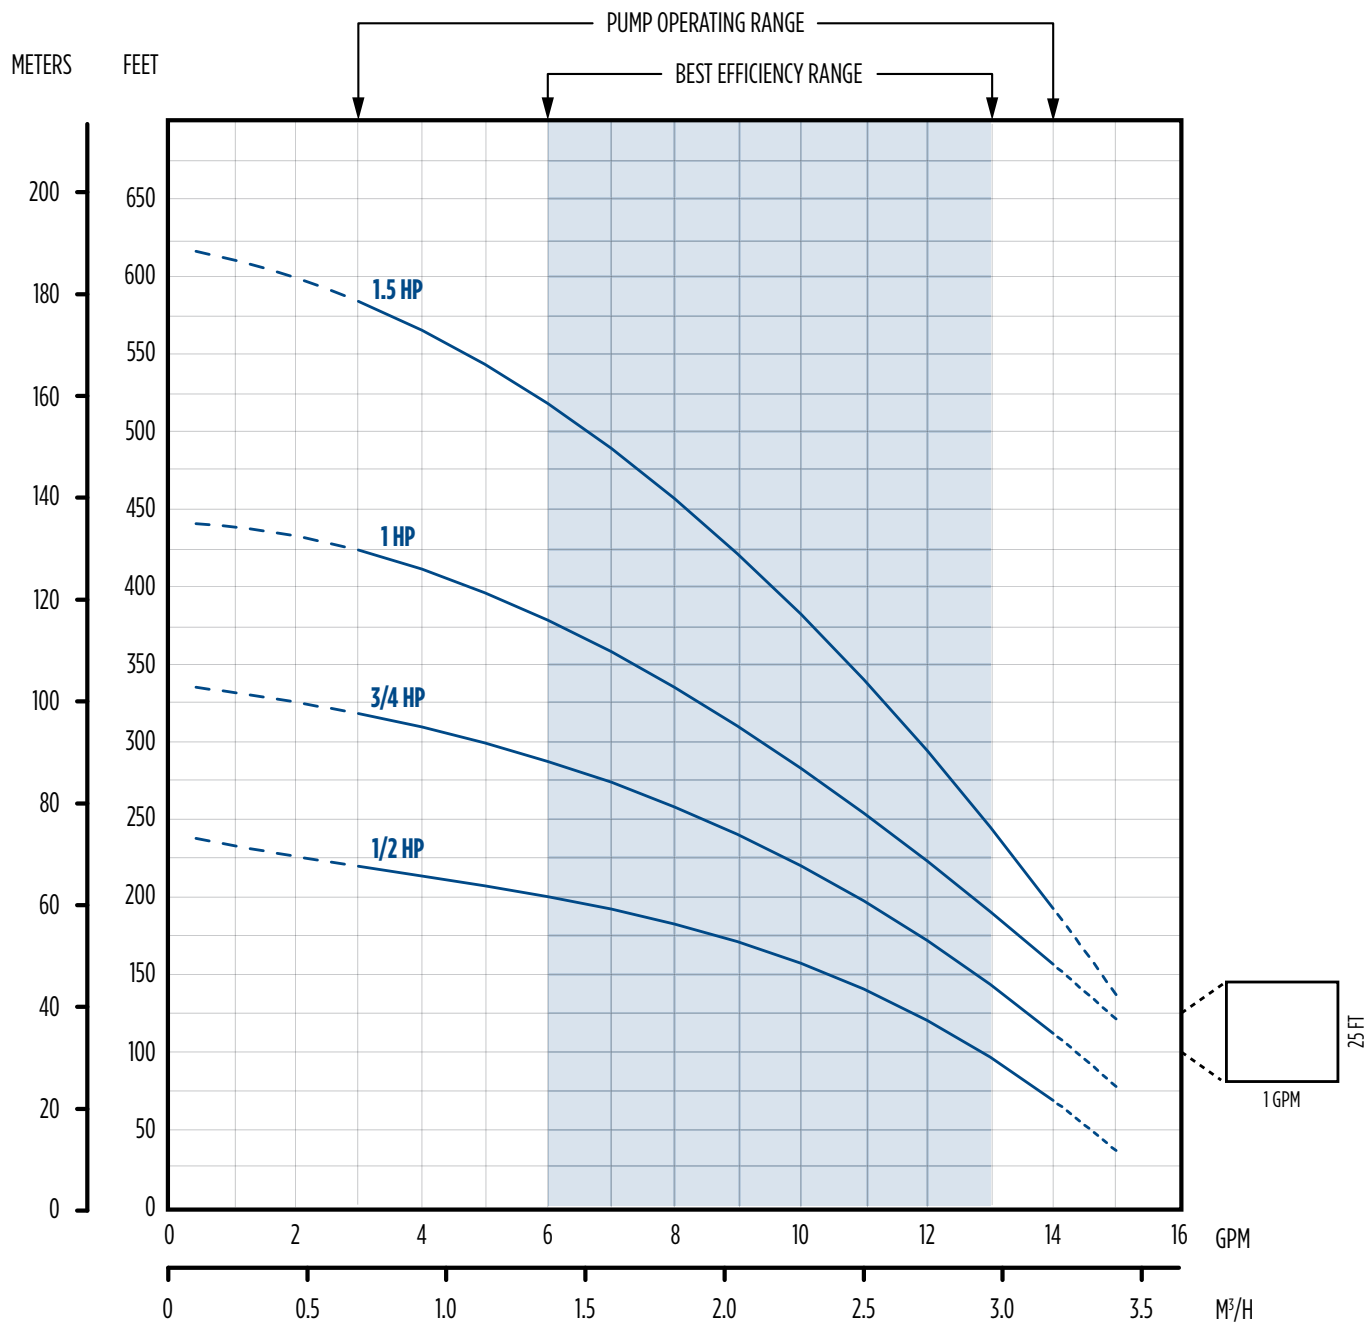

E SERIES ENVIRONMENTAL PUMPS - 10 GPM THERMOPLASTIC

PERFORMANCE


HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																			Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	600		
1/2	0			14	14	13	12	11	10	8	6									242	
	20	14	13	13	12	11	9	8	5												
	30	13	12	12	11	9	7	5													
	40	12	11	10	9	7	4														
	50	11	10	9	6	4															
	60	10	8	6	3																
	70	8	6	3																	
80	5																				
Shut-off PSI		96	87	79	70	61	53	44	35	27	18										
3/4	0					14	14	13	12	12	11	8	5							337	
	20			14	14	13	12	11	11	10	9	5									
	30		14	13	13	12	11	10	10	9	7	3									
	40	14	13	13	12	11	10	9	8	7	6										
	50	13	13	12	11	10	9	8	7	5	3										
	60	13	12	11	10	9	8	7	5	3											
	70	12	11	10	9	8	6	5													
80	11	10	9	8	6	4															
Shut-off PSI		137	129	120	111	103	94	85	77	68	59	38	16								
1	0							14	14	13	13	11	9	7	5					441	
	20					14	14	13	13	12	11	9	8	5							
	30				14	14	13	13	12	11	10	9	7	3							
	40			14	13	13	12	12	11	10	10	8	5								
	50	14	14	13	13	12	12	11	10	9	9	7	4								
	60	14	13	13	12	12	11	10	9	9	8	6									
	70	13	13	12	11	11	10	9	8	8	7	4									
80	13	12	11	11	10	9	8	8	7	6											
Shut-off PSI		182	174	165	156	148	139	130	122	113	105	83	61	40	18						
1.5	0									14	14	13	12	11	9	8	7	5		619	
	20						14	14	14	13	13	12	11	10	8	7	5				
	30					14	14	14	13	13	13	12	10	9	8	6	4				
	40				14	14	14	13	13	13	12	11	10	8	7	5					
	50			14	14	14	13	13	12	12	12	10	9	8	6	4					
	60		14	14	14	13	13	12	12	12	11	10	8	7	5	3					
	70	14	14	13	13	13	12	12	11	11	10	9	8	6	4						
80	14	13	13	13	12	12	11	11	10	10	9	7	5	3							
Shut-off PSI		259	251	242	233	225	216	207	199	190	181	160	138	117	95	73	52	30	8		

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



E SERIES ENVIRONMENTAL PUMPS - 20 GPM THERMOPLASTIC

PERFORMANCE

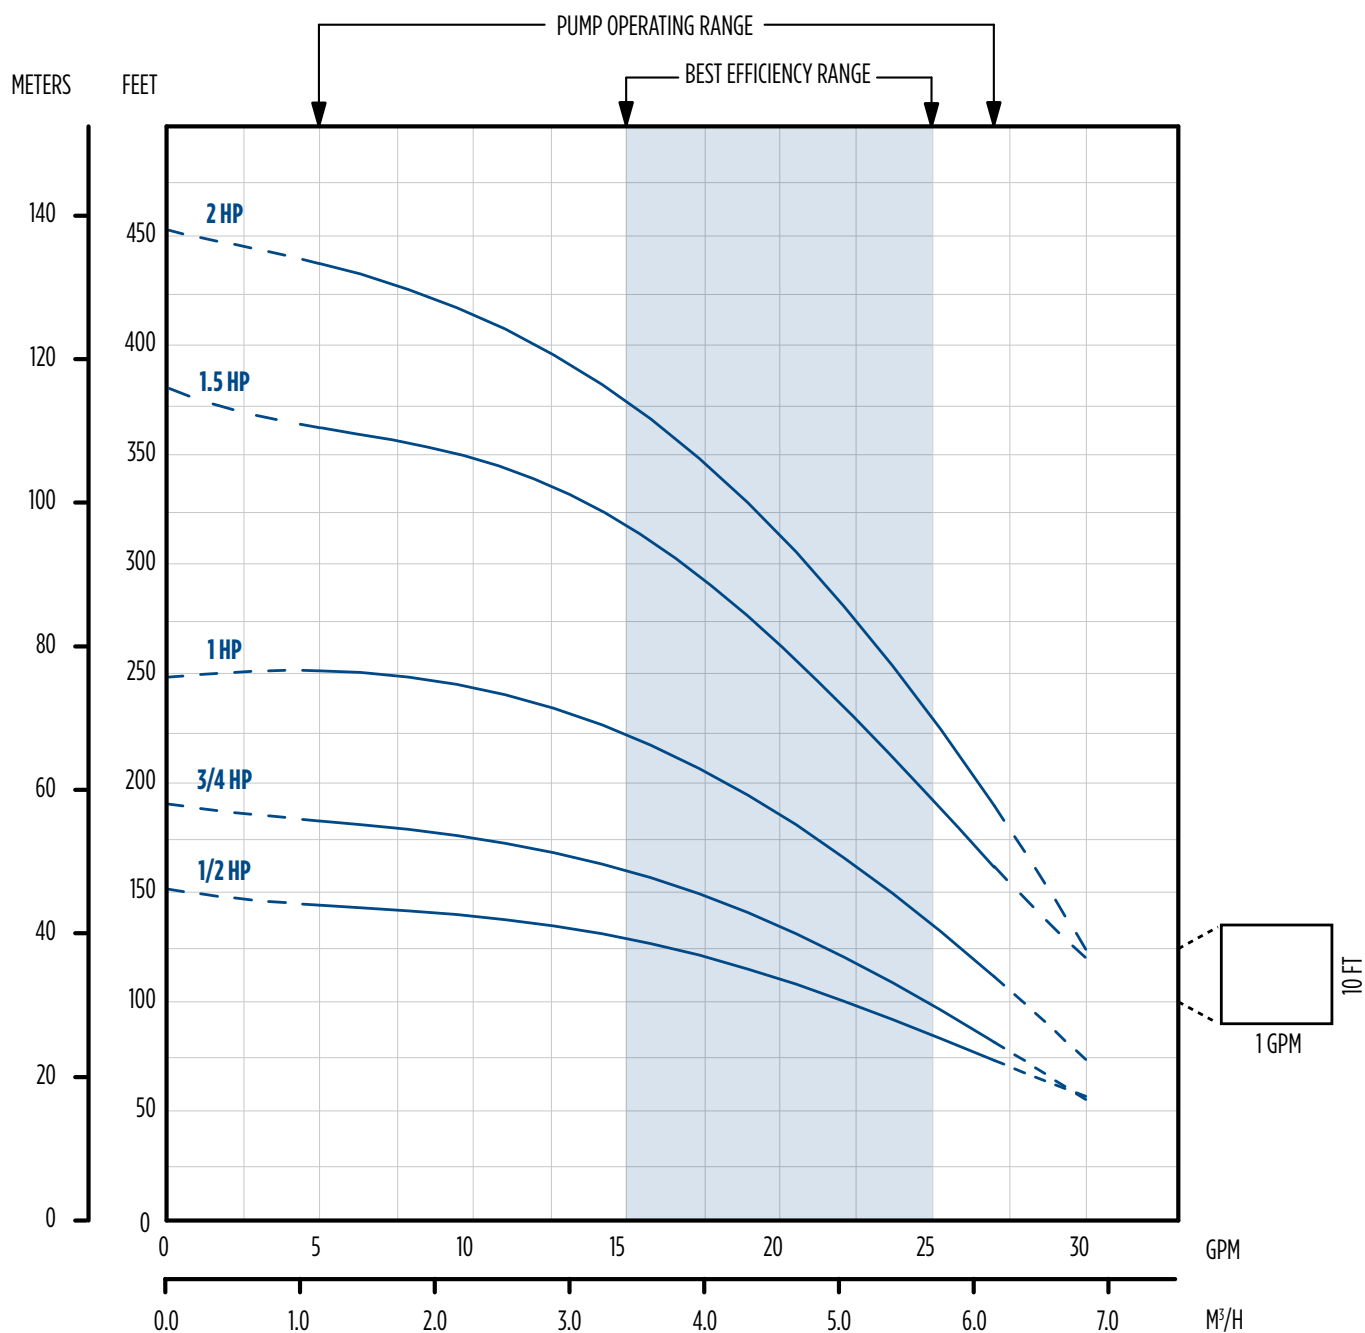

E SERIES ENVIRONMENTAL PUMPS - 20 GPM THERMOPLASTIC

PERFORMANCE


HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
1/2	0				26	22	18	9											152
	20		24	21	16														
	30	24	21	15															
	40	20	13																
	50	12																	
	60																		
	70																		
	80																		
Shut-off PSI		57	48	40	31	22	14	5											
3/4	0				27	25	22	19	15	7									191
	20		26	24	21	18	13												
	30	26	24	21	18	12													
	40	23	20	17	11														
	50	20	16	9															
	60	15	8																
	70	6																	
	80																		
Shut-off PSI		74	65	57	48	39	31	22	13	5									
1	0						26	25	23	20	18	6							251
	20			27	26	24	22	20	18	15	8								
	30		27	26	24	22	19	17	14	7									
	40	27	25	23	21	19	17	13											
	50	25	23	21	19	16	12												
	60	23	21	18	16	11													
	70	20	18	15	10														
	80	18	15	9															
Shut-off PSI		100	91	83	74	65	57	48	40	31	22	1							
1.5	0							27	26	24	21	17	9						379
	20						27	25	24	23	21	17	10						
	30					26	25	24	22	21	20	15							
	40				26	25	23	22	21	19	18	11							
	50		27	26	25	23	22	21	19	17	15								
	60	27	26	24	23	22	20	19	17	15	11								
	70	26	24	23	21	20	19	17	14	11	5								
	80	24	23	21	20	18	16	14	10										
Shut-off PSI		156	147	138	130	121	112	104	95	86	78	56	34	13					
2	0								27	27	24	21	17	12					452
	20							27	26	25	24	21	18	13					
	30						27	26	25	24	23	19	16	9					
	40					27	26	25	24	23	21	18	13						
	50				27	26	25	24	22	21	20	16	10						
	60		27	27	26	25	23	22	21	19	18	14	5						
	70	27	27	26	24	23	22	21	19	18	16	10							
	80	26	25	24	23	22	20	19	18	16	14	6							
Shut-off PSI		187	178	170	161	153	144	135	127	118	109	88	66	44	23				

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



E SERIES ENVIRONMENTAL PUMPS - 35 GPM STAINLESS STEEL

PERFORMANCE

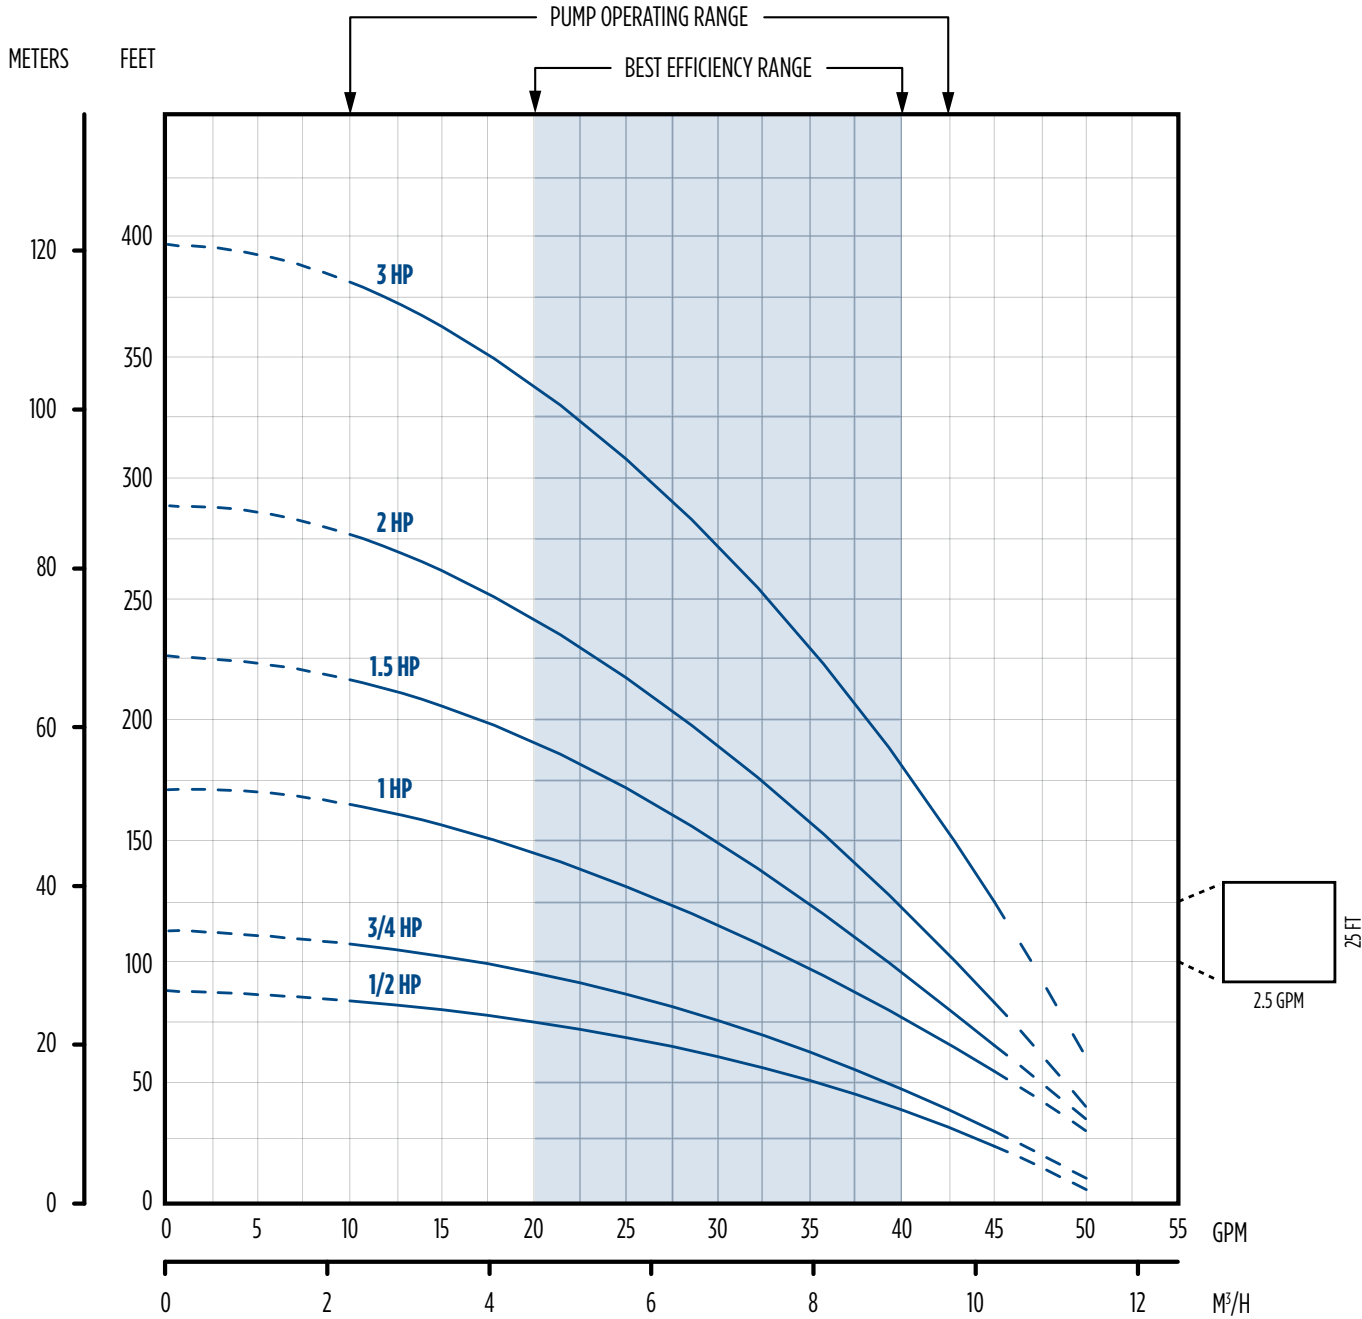

E SERIES ENVIRONMENTAL PUMPS - 35 GPM STAINLESS STEEL

PERFORMANCE


HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
1/2	0		40	30	15														88
	10	38	29	11															
	20	27																	
	30																		
	40																		
	50																		
Shut-off PSI		29	21	12	3														
3/4	0		42	36	28	17													113
	10	42	35	27	14														
	20	33	25	11															
	30	24																	
	40																		
	50																		
Shut-off PSI		40	32	23	14	6													
1	0			44	40	34	28	22	13										171
	10		43	39	33	27	21	11											
	20	43	38	32	26	20													
	30	37	31	26	19														
	40	30	25	17															
	50	24	16																
Shut-off PSI		65	57	48	39	31	22	13	5										
1.5	0				43	40	36	31	27	23	18								226
	10		45	42	39	35	31	27	23	16									
	20	45	42	38	34	30	26	22	15										
	30	41	38	34	30	26	21	13											
	40	37	33	29	25	20	12												
	50	32	28	24	19	10													
	60	28	24	18															
	70	23	17																
Shut-off PSI		89	81	72	63	55	46	37	29	20	11								
2	0				45	43	41	38	34	31	28	19							288
	10			45	43	40	37	34	31	27	24	11							
	20		45	42	40	37	33	30	27	24	20								
	30	44	42	39	36	33	30	26	23	19	12								
	40	42	39	36	32	29	26	22	18	11									
	50	38	35	32	29	25	22	17	10										
	60	35	31	28	25	21	16												
	70	31	28	24	21	15													
Shut-off PSI		116	107	99	90	81	73	64	55	47	38	16							
3	0					45	44	42	40	38	32	26	18						396
	10					45	44	42	40	38	36	29	23	12					
	20				45	44	42	40	38	35	33	27	19						
	30			45	43	42	39	37	35	32	30	24	13						
	40		45	43	41	39	37	34	32	30	27	20							
	50	44	43	41	39	36	34	32	29	27	24	14							
	60	43	41	38	36	34	31	29	26	24	21								
	70	40	38	36	33	31	28	26	23	20	15								
Shut-off PSI		163	154	145	137	128	119	111	102	94	85	63	42	20					

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



E SERIES ENVIRONMENTAL PUMPS - 45 GPM STAINLESS STEEL

PERFORMANCE

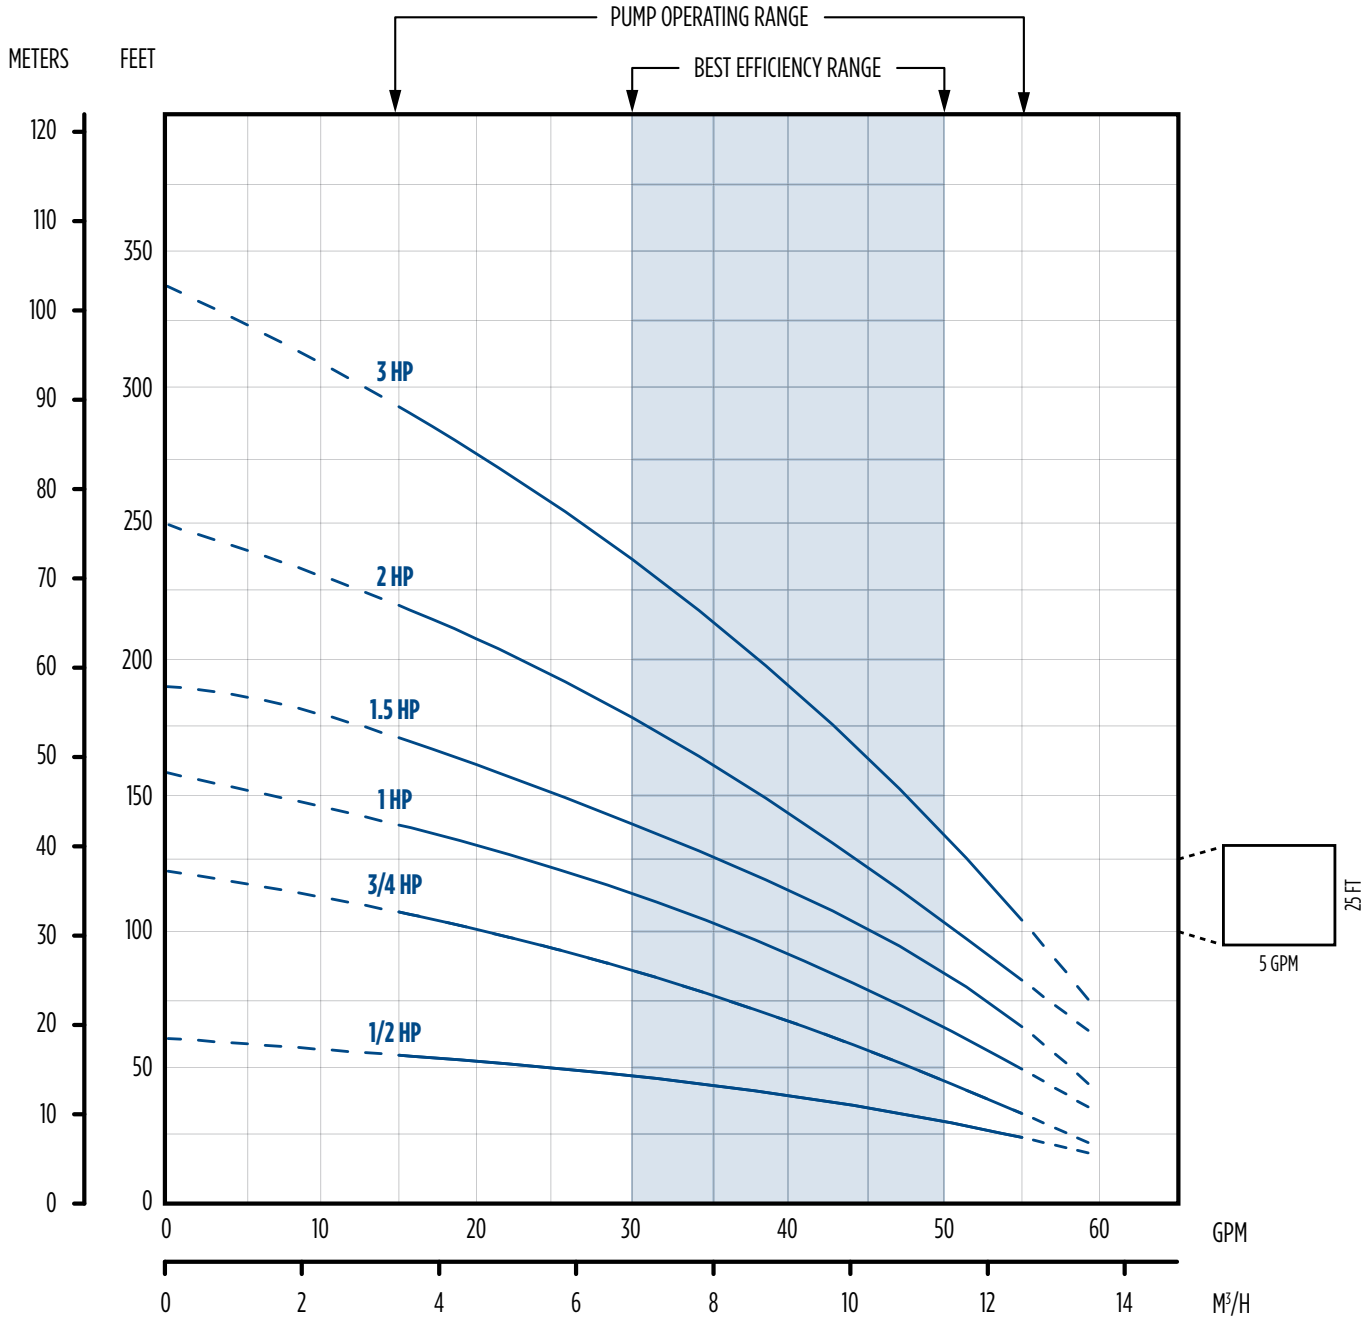

E SERIES ENVIRONMENTAL PUMPS - 45 GPM STAINLESS STEEL

PERFORMANCE


HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
1/2	0		40																61
	10	36																	
	20																		
	30																		
	40																		
	50																		
Shut-off PSI		18	9																
3/4	0		52	43	33	21													122
	10	51	42	32	18														
	20	40	30	16															
	30	28																	
	40																		
	50																		
Shut-off PSI		44	36	27	18	10													
1	0		51	43	35	25	27												158
	10																		
	20	49	42	34	23														
	30	41	32	21															
	40	31	20																
	50	17																	
Shut-off PSI		60	51	43	34	25	17												
1.5	0		55	51	44	37	28	19	21										190
	10																		
	20	55	50	43	35	27	18												
	30	49	42	34	26	16													
	40	41	33	24															
	50	32	23																
Shut-off PSI		74	65	56	48	39	30	22	13										
2	0		55	50	45	40	35	29	22	23									250
	10																		
	20		54	49	44	39	34	28	21										
	30	53	49	44	38	33	27	19											
	40	48	43	38	32	26	18												
	50	42	37	31	24	17													
Shut-off PSI		99	91	82	73	65	56	48	39	30	22								
3	0		55	52	48	45	41	37	32	28	27								337
	10																		
	20		55	52	48	45	41	37	32	28									
	30		54	51	48	44	40	36	32	27	22								
	40	54	51	47	44	40	35	31	26	21	15								
	50	50	47	43	39	35	30	25	20										
	60	46	42	38	34	30	25	19											
	70	42	38	33	29	24	18												
	80	37	33	28	23	17													
	90	32	27	22	16														
	100	27	21	16															
Shut-off PSI		137	129	120	111	103	94	85	77	68	59	38							

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



E SERIES ENVIRONMENTAL PUMPS - 60 GPM STAINLESS STEEL

PERFORMANCE

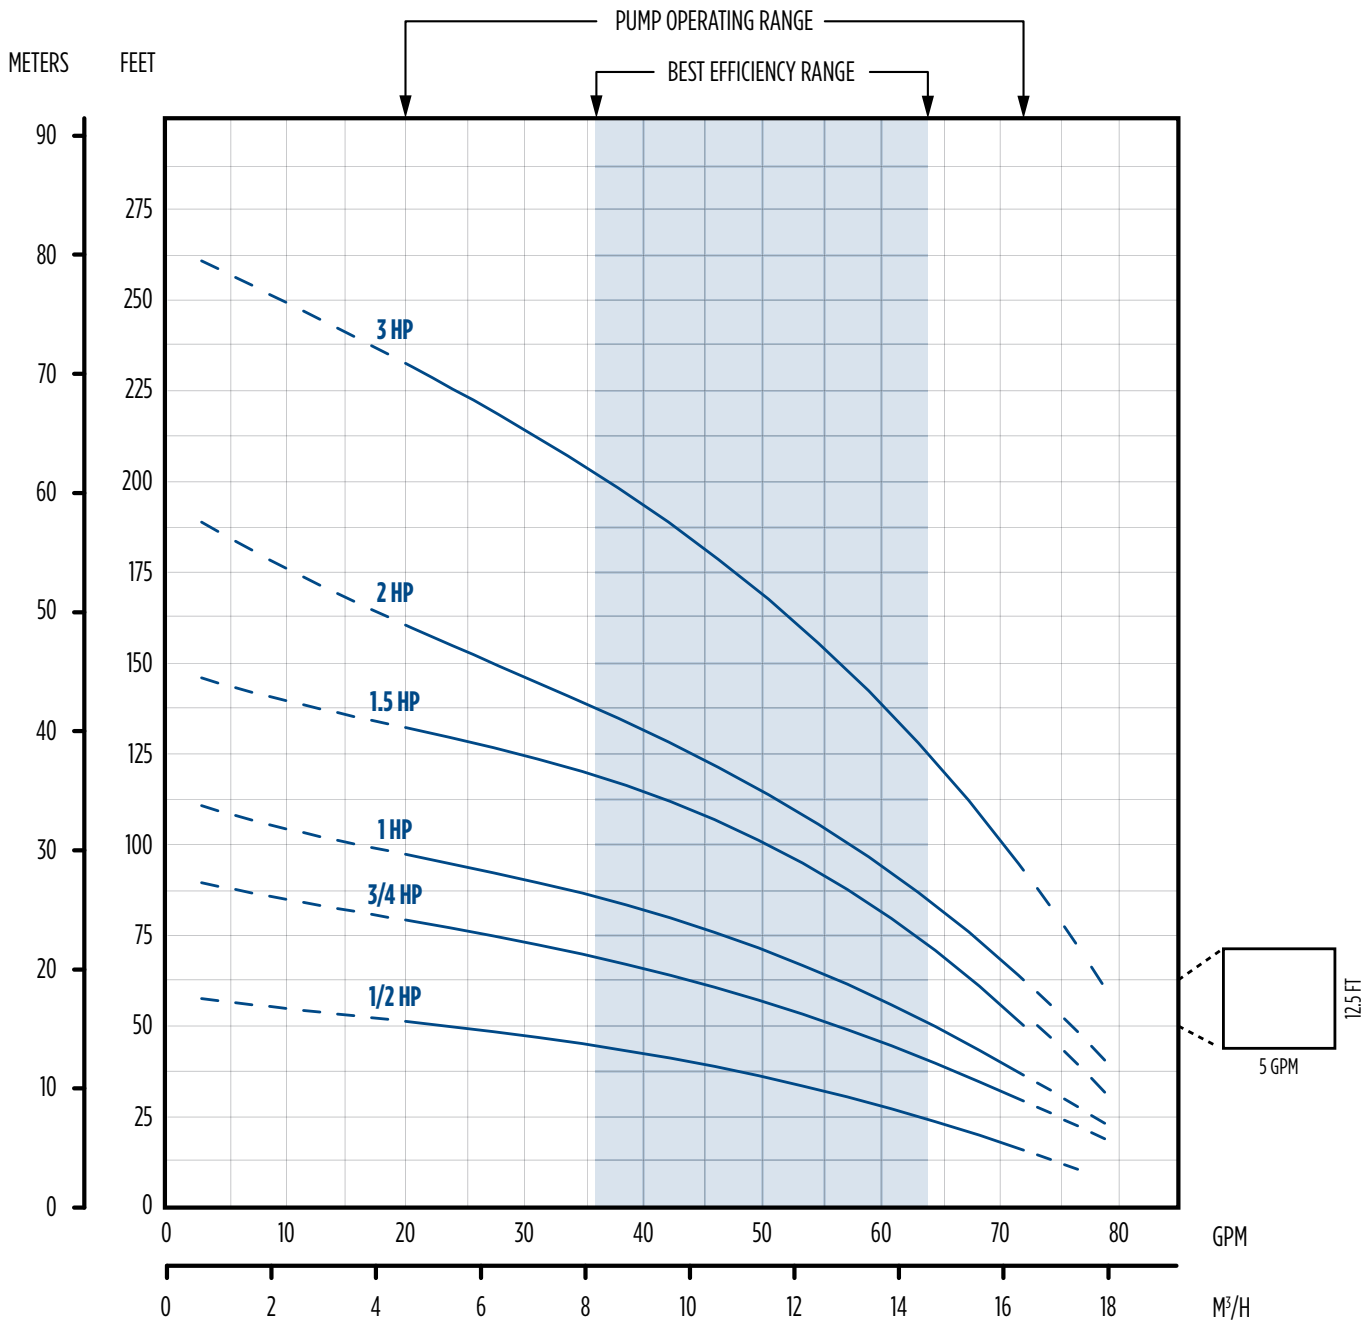

E SERIES ENVIRONMENTAL PUMPS - 60 GPM STAINLESS STEEL

PERFORMANCE


HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
1/2	0	68	44																59
	10	39																	
	20																		
	30																		
	40																		
	50																		
Shut-off PSI		17	8																
3/4	0		64	47															92
	10	62	43																
	20	40																	
	30																		
	40																		
	50																		
Shut-off PSI		31	22	14															
1	0		70	58	42														114
	10	68	56	39															
	20	54	35																
	30	31																	
	40																		
	50																		
Shut-off PSI		41	32	23	15														
1.5	0			69	61	51	34												149
	10		67	59	49	31													
	20	66	58	47	27														
	30	57	44	24															
	40	42	20																
	50																		
Shut-off PSI		56	47	39	30	21	13												
2	0				66	57	47	34	21										195
	10		72	65	56	45	32												
	20	71	64	54	43	30													
	30	62	53	41	28														
	40	51	39	26															
	50	37	24																
Shut-off PSI		76	67	58	50	41	32	24	15										
3	0					70	65	60	53	46	37								265
	10				70	64	59	52	45	36	25								
	20			69	64	58	51	43	34	24									
	30		68	63	57	50	42	33	22										
	40	67	62	56	49	41	31	20											
	50	61	55	48	39	29													
Shut-off PSI		106	98	89	80	72	63	54	46	37	28								

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.



E SERIES ENVIRONMENTAL PUMPS - 90 GPM STAINLESS STEEL

PERFORMANCE

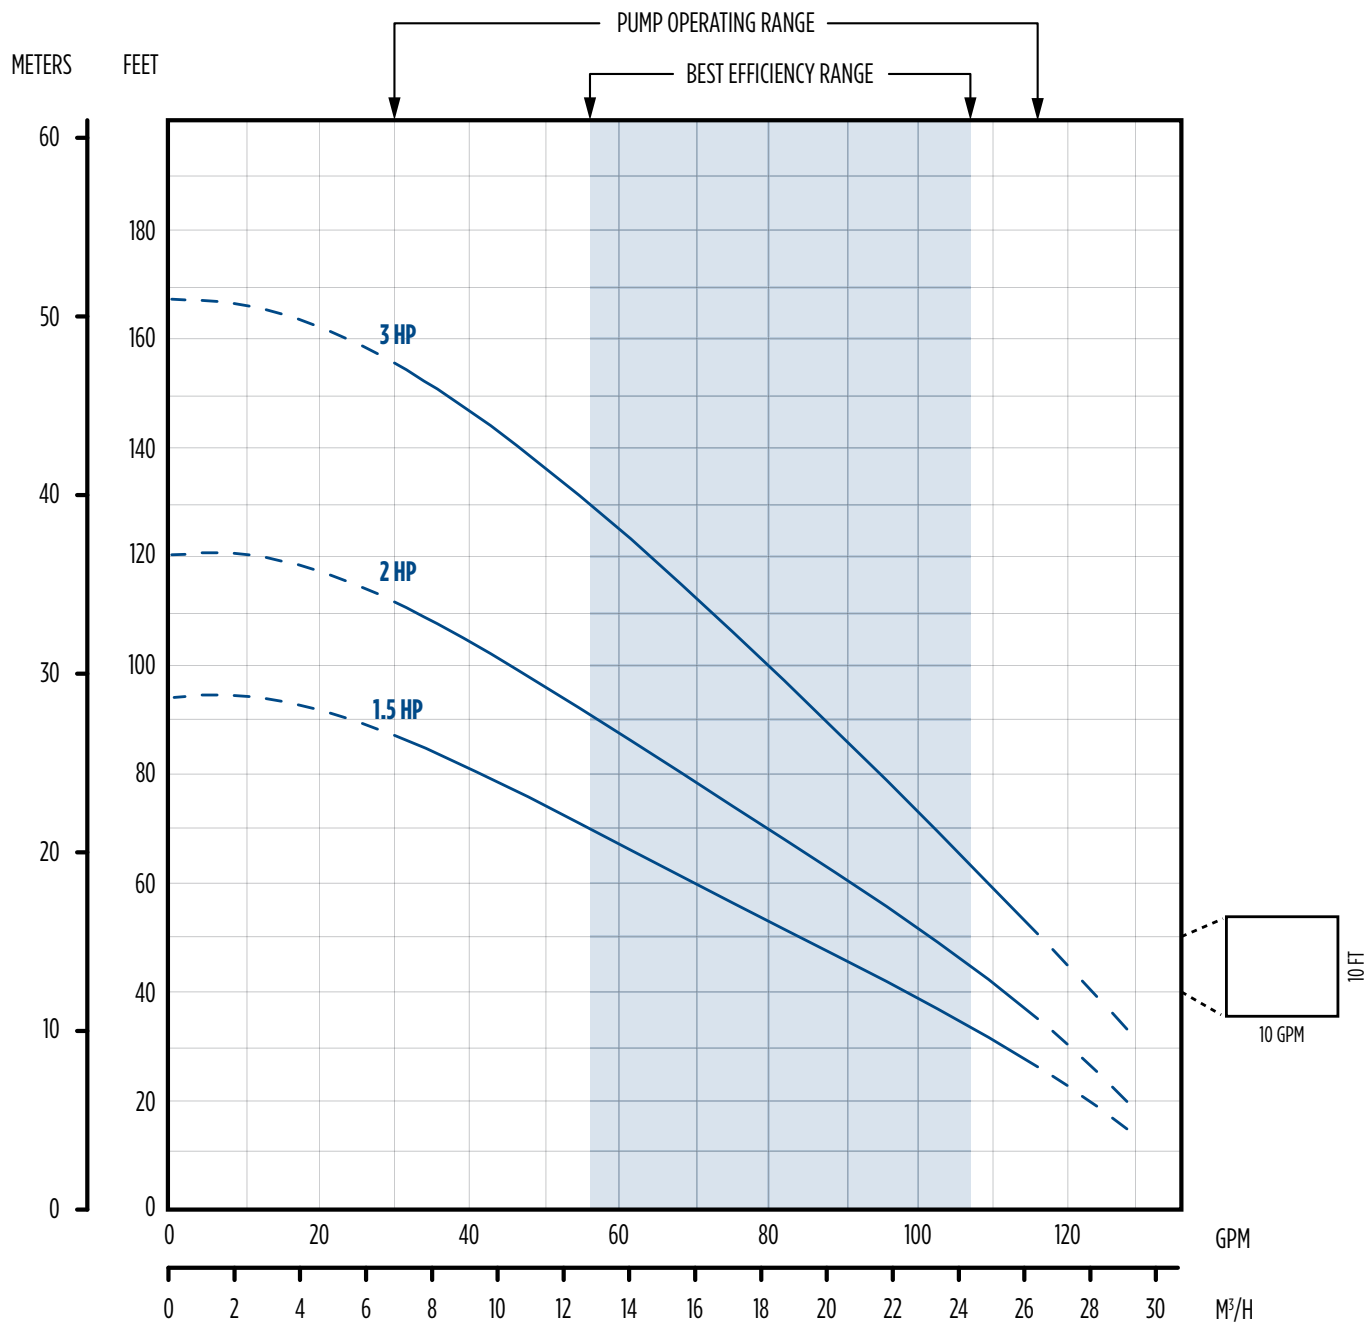

E SERIES ENVIRONMENTAL PUMPS - 90 GPM STAINLESS STEEL

PERFORMANCE

HP	PSI	Depth to Pumping Water Level (Lift) in Feet. Shaded Areas Indicate Most Efficient Performance																	Shut-Off (ft)
		20	40	60	80	100	120	140	160	180	200	250	300	350	400	450	500	550	
1.5	0		99	69	43														95
	10	94	65	38															
	20	61	32																
	30																		
	40																		
	50																		
Shut-off PSI		32	24	15	6														
2	0		112	91	68	47													121
	10	109	88	65	43														
	20	84	61	39															
	30	58	34																
	40																		
	50																		
Shut-off PSI		44	35	26	18	9													
3	0			110	96	79	64	48											167
	10		108	93	77	61	45												
	20	106	91	74	59	42													
	30	88	72	57	38														
	40	69	54	34															
	50	52	30																
Shut-off PSI		64	55	46	38	29	20	12											

NOTES: Performance shown does not include friction loss in the drop pipe. All performance data is based on rated motor nameplate voltage.

C1 SERIES CISTERN PUMPS

Designed for use in gray water/filtered effluent service applications, the C1 Series cistern pump provides high performance and long life in less than ideal water conditions. The C1 Series pump is able to pass solids up to 1/8" without having a negative effect on the internal hydraulic components.

The pump's unique bottom suction design allows for maximum fluid drawdown without compromising durability or overall life, and it does not require the use of a flow induction sleeve. Intended specifically for use in a cistern or tank, C1 Series pumps are suitable for use in agricultural, residential, and commercial installations.

APPLICATIONS

- Gray water pumping
- Filtered effluent service water pumping
- Water reclamation projects such as pumping from rain catchment basins
- Aeration and other fountain or pond applications
- Agriculture and livestock water pumping

FEATURES

- Supplied with a removable 5" base for secure and reliable mounting
- Bottom suction design
- Robust thermoplastic discharge head design resists breakage during installation and operation
- Single-shell housing design provides a compact unit while ensuring cool and quiet operation
- Hydraulic components molded from high quality engineered thermoplastics
- Optimized hydraulic design allows for increased performance and decreased power usage
- All metal components are made of high grade stainless steel for corrosion resistance
- Available with a high quality 115 V or 230 V, 1/2 hp motor
- Fluid flows of 10, 20, and 30 gpm, with a maximum shut-off pressure of 100 psi
- Heavy-duty 600 V 10 foot SJ00W jacketed lead




C1 SERIES CISTERN PUMPS - ORDERING INFORMATION

ORDERING INFORMATION

FPS C1 Series Pumps							
GPM	HP	Volts	Stage	Model	Order	Length (in)	Weight (lbs)
10	1/2	115	7	10C1-05P4-2W115	90301005	26	17
		230	7	10C1-05P4-2W230	90301010	26	17
20		115	5	20C1-05P4-2W115	90302005	25	16
		230	5	20C1-05P4-2W230	90302010	25	16
20X		115	6	20XC1-05P4-2W115	90302015	26	17
		230	6	20XC1-05P4-2W230	90302020	26	17
30		115	4	30C1-05P4-2W115	90303005	25	16
		230	4	30C1-05P4-2W230	90303010	25	16

NOTES: All units have 10 foot long SJ00W leads.

PERFORMANCE

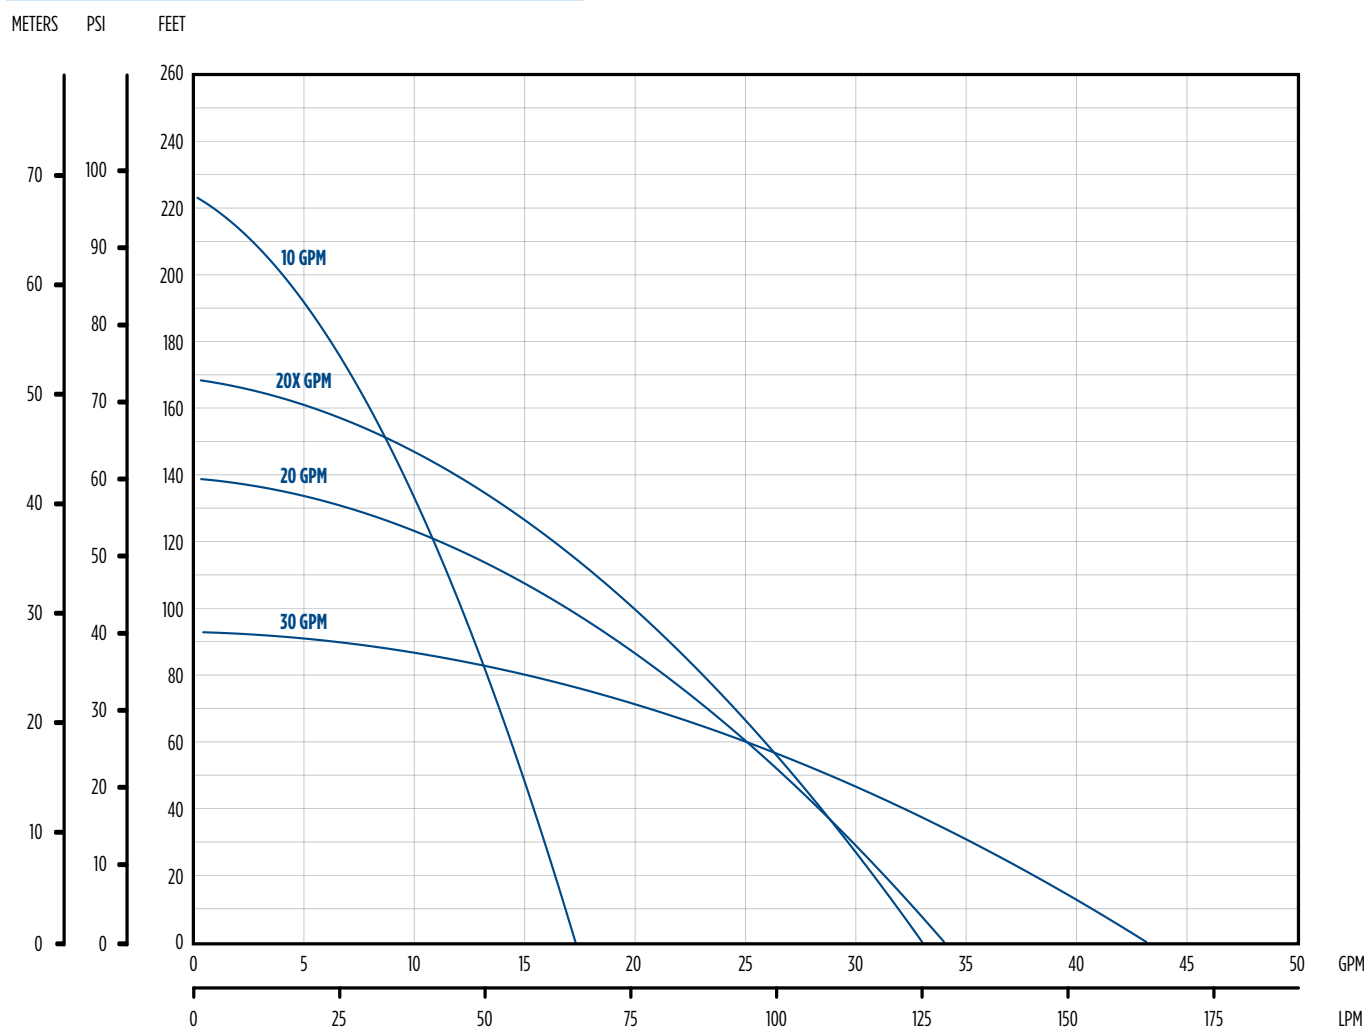

SUBMERSIBLE PUMP ACCESSORIES

ORDERING INFORMATION

Check Valves - Silicone Bronze					
Description	Inlet	Outlet	Case Qty.	Order No.	Wt. (lbs)
Flomatic™ 4221LEB	1-1/4" MNPT	1" FNPT	36	91980631	1.25
Flomatic™ 4242LEB	1-1/4" MNPT	1-1/4" FNPT	36	91980649	1.75

Check Valves - Stainless Steel					
Description	Inlet	Outlet	Case Qty.	Order No.	Wt. (lbs)
Flomatic™ 4221LSS2	1-1/4" MNPT	1" FNPT	49	91985317	1.4
Flomatic™ 4242SS2	1-1/4" MNPT	1-1/4" FNPT	49	91985309	1.5

Check Valves - Ductile Iron					
Description	Inlet	Outlet	Carton Qty.	Order No.	Wt. (lbs)
Simmons #658SB	2" MNPT	2" FNPT	1	91982157	3.5
Simmons #660SB	3" MNPT	3" FNPT	1	91981266	10
Simmons #661SB	4" MNPT	4" FNPT	1	91980334	21

Flomatic™ Poppet with Removable Ring (Patent Pending)					
Description				Order No.	Wt. (lbs)
Flomatic™ Poppet with Removable Ring				91985259R	0.1
T-Handle Poppet Wrench				106964101	1

Reducer Bushing					
Description	Inlet	Outlet	PSI Rating	Order No.	Wt.
White PVC Bushing	1-1/4" MNPT	1" FNPT	200 PSI	31031008R	0.2

NOTES: Flomatic™ is a trademark of the Danfoss Corporation.



Check Valves



Poppet



Reducer Bushing



T-Handle Poppet Wrench

REFERENCES - FRICTION LOSS

PVC SCHEDULE 80 IPS PLASTIC IN 100' OF PIPE

Pipe Size	1/2"		3/4"		1"		1-1/4"		1-1/2"		2"		2-1/2"		3"		4"	
GPM	Head Loss	Vel (ft/s)	Head Loss	Vel (ft/s)	Head Loss	Vel (ft/s)	Head Loss	Vel (ft/s)	Head Loss	Vel (ft/s)	Head Loss	Vel (ft/s)	Head Loss	Vel (ft/s)	Head Loss	Vel (ft/s)	Head Loss	Vel (ft/s)
1	1.87	1.37	0.42	0.74	0.12	0.45	0.03	0.25	0.01	0.18								
2	6.74	2.74	1.52	1.48	0.44	0.89	0.11	0.50	0.05	0.36	0.01	0.22						
3	14.29	4.11	3.21	2.23	0.93	1.34	0.23	0.75	0.10	0.54	0.03	0.33	0.01	0.23				
4	24.34	5.48	5.47	2.97	1.59	1.78	0.39	1.00	0.18	0.73	0.05	0.43	0.02	0.30				
5	36.79	6.85	8.27	3.71	2.40	2.23	0.59	1.25	0.27	0.91	0.08	0.54	0.03	0.38	0.01	0.24		
6	51.57	8.22	11.59	4.45	3.36	2.68	0.82	1.50	0.38	1.09	0.11	0.65	0.04	0.45	0.02	0.29		
7	68.61	9.59	15.43	5.19	4.47	3.12	1.09	1.75	0.50	1.27	0.14	0.76	0.06	0.53	0.02	0.34		
8	87.86	10.96	19.75	5.94	5.73	3.57	1.40	2.00	0.64	1.45	0.18	0.87	0.08	0.61	0.03	0.39		
9	109.27	12.33	24.57	6.68	7.12	4.01	1.74	2.25	0.80	1.63	0.23	0.98	0.01	0.68	0.03	0.44		
10	132.82	13.70	29.86	7.42	8.66	4.46	2.12	2.50	0.97	1.82	0.28	1.09	0.12	0.76	0.04	0.49		
11			35.63	8.16	10.33	4.91	2.53	2.75	1.16	2.00	0.33	1.20	0.14	0.83	0.05	0.53		
12			41.86	8.90	12.14	5.35	2.97	3.00	1.36	2.18	0.39	1.30	0.16	0.91	0.06	0.58		
14			55.69	10.39	16.15	6.24	3.95	3.50	1.81	2.54	0.52	1.52	0.22	1.06	0.07	0.68		
16			71.31	11.87	20.68	7.14	5.06	4.00	2.32	2.90	0.67	1.74	0.28	1.21	0.09	0.78		
18			88.69	13.36	25.72	8.03	6.30	4.50	2.89	3.27	0.83	1.96	0.34	1.36	0.12	0.87		
20			107.80	14.84	31.26	8.92	7.65	5.00	3.51	3.63	1.01	2.17	0.42	1.51	0.14	0.97	0.04	0.56
22					37.29	9.81	9.13	5.50	4.19	3.99	1.20	2.39	0.50	1.67	0.17	1.07	0.04	0.61
24					43.81	10.70	10.72	6.00	4.92	4.36	1.41	2.61	0.59	1.82	0.20	1.17	0.05	0.67
26					50.81	11.60	12.44	6.50	5.71	4.72	1.64	2.83	0.68	1.97	0.23	1.26	0.06	0.73
28					58.29	12.49	14.27	7.00	6.55	5.08	1.88	3.04	0.78	2.12	0.26	1.36	0.07	0.78
30					66.23	13.38	16.21	7.50	7.44	5.45	2.13	3.26	0.89	2.27	0.30	1.46	0.08	0.84
35							21.57	8.75	9.89	6.35	2.84	3.80	1.18	2.65	0.40	1.70	0.10	0.98
40							27.62	10.00	12.67	7.26	3.63	4.35	1.51	3.03	0.51	1.94	0.13	1.12
45							34.36	11.25	15.76	8.17	4.52	4.89	1.88	3.41	0.64	2.19	0.17	1.26
50	0.03	0.62					41.76	12.51	19.16	9.08	5.49	5.44	2.28	3.78	0.77	2.43	0.20	1.40
55	0.03	0.68					49.82	13.76	22.85	9.99	6.55	5.98	2.72	4.16	0.92	2.67	0.24	1.53
60	0.04	0.74					58.53	15.01	26.85	10.89	7.70	6.52	3.20	4.54	1.09	2.91	0.28	1.67
65	0.04	0.80							31.14	11.80	8.93	7.07	3.71	4.92	1.26	3.16	0.33	1.81
70	0.05	0.86							35.72	12.71	10.24	7.61	4.25	5.30	1.45	3.40	0.38	1.95
75	0.06	0.92							40.59	13.62	11.64	8.15	4.83	5.68	1.64	3.64	0.43	2.09
80	0.07	0.98							45.74	14.52	13.12	8.70	5.45	6.06	1.85	3.89	0.48	2.23
85	0.07	1.05							51.18	15.43	14.68	9.24	6.09	6.43	2.07	4.13	0.54	2.37
90	0.08	1.11							56.89	16.34	16.32	9.78	6.77	6.81	2.30	4.37	0.60	2.51
95	0.09	1.17							62.88	17.25	18.03	10.33	7.49	7.19	2.54	4.61	0.66	2.65
100	0.01	1.23							69.15	18.16	19.83	10.87	8.23	7.57	2.80	4.86	0.73	2.79
125	0.15	1.54									29.98	13.59	12.45	9.46	4.23	6.07	1.01	3.49
150	0.21	1.85									42.02	16.31	17.45	11.35	5.93	7.29	1.54	4.19
175	0.28	2.15											23.21	13.25	7.89	8.50	2.05	4.88

NOTES: Suction Velocities should not exceed 8 feet per second. Calculated using Williams and Hazen formula using C = 150.

REFERENCES - FRICTION LOSS

WATER IN 100' OF STEEL PIPE

GPM	Pipe Size 1/2" - Actual Size 0.622			Pipe Size 3/4" - Actual Size 0.824			Pipe Size 1" - Actual Size 1.049			Pipe Size 1-1/4" - Actual Size 1.38			Pipe Size 1-1/2" - Actual Size 1.61		
	Friction	Vel. (ft/sec)	Vel. Head (ft)	Friction	Vel. (ft/sec)	Vel. Head (ft)	Friction	Vel. (ft/sec)	Vel. Head (ft)	Friction	Vel. (ft/sec)	Vel. Head (ft)	Friction	Vel. (ft/sec)	Vel. Head (ft)
1	2.099	1.056	0.017	0.534	0.602	0.006	0.165	0.371	0.002	0.043	0.215	0.001	0.021	0.158	0.000
2	7.577	2.112	0.069	1.929	1.203	0.023	0.596	0.742	0.009	0.157	0.429	0.003	0.074	0.315	0.002
3	16.056	3.168	0.156	4.087	1.805	0.051	1.263	1.114	0.019	0.332	0.644	0.006	0.157	0.473	0.003
4	27.354	4.223	0.277	6.962	2.407	0.090	2.151	1.485	0.034	0.566	0.858	0.011	0.268	0.630	0.006
5	41.352	5.279	0.433	10.525	3.008	0.141	3.252	1.856	0.054	0.856	1.073	0.018	0.404	0.788	0.001
6	57.961	6.335	0.624	14.753	3.610	0.203	4.558	2.227	0.077	1.200	1.287	0.026	0.567	0.946	0.014
7	77.112	7.391	0.849	19.628	4.211	0.276	6.064	2.599	0.105	1.597	1.502	0.035	0.754	1.103	0.019
8	98.747	8.447	1.109	25.134	4.813	0.360	7.765	2.970	0.137	2.045	1.716	0.046	0.966	1.261	0.025
9	122.817	9.503	1.404	31.261	5.415	0.456	9.657	3.341	0.173	2.543	1.931	0.058	1.201	1.418	0.031
10	149.280	10.559	1.733	37.997	6.016	0.563	11.738	3.712	0.214	3.091	2.145	0.072	1.460	1.576	0.039
11	178.099	11.615	2.097	45.332	6.618	0.681	14.004	4.083	0.259	3.688	2.360	0.087	1.742	1.734	0.047
12	209.241	12.670	2.495	53.259	7.220	0.810	16.453	4.455	0.308	4.333	2.574	0.103	2.047	1.891	0.056
13	242.675	13.726	2.928	61.769	7.821	0.951	19.082	4.826	0.362	5.025	2.789	0.121	2.374	2.049	0.065
14	278.376	14.782	3.396	70.856	8.423	1.103	21.889	5.197	0.420	5.764	3.003	0.140	2.723	2.206	0.076
15	316.317	15.838	3.899	80.513	9.025	1.266	24.873	5.568	0.482	6.550	3.218	0.161	3.094	2.364	0.087
16				90.735	9.626	1.440	28.031	5.940	0.548	7.381	3.432	0.183	3.487	2.521	0.099
17				101.517	10.228	1.626	31.362	6.311	0.619	8.258	3.647	0.207	3.901	2.679	0.112
18				112.852	10.829	1.823	34.863	6.682	0.694	9.181	3.861	0.232	4.337	2.837	0.125
19				124.738	11.431	2.031	38.535	7.053	0.773	10.148	4.076	0.258	4.793	2.994	0.139
20				137.168	12.033	2.250	42.375	7.425	0.857	11.159	4.290	0.286	5.271	3.152	0.154
21				150.140	12.634	2.481	46.383	7.796	0.945	12.214	4.505	0.315	5.769	3.309	0.170
22				163.649	13.236	2.723	50.556	8.167	1.037	13.313	4.719	0.346	6.288	3.467	0.187
23				177.691	13.838	2.976	54.894	8.538	1.133	14.455	4.934	0.378	6.828	3.625	0.204
24				192.263	14.439	3.241	59.396	8.909	1.234	15.641	5.148	0.412	7.388	3.782	0.222
25				207.363	15.041	3.516	64.061	9.281	1.339	16.869	5.363	0.447	7.968	3.940	0.241
26				222.985	15.643	3.803	68.887	9.652	1.448	18.140	5.577	0.483	8.569	4.097	0.261
27				239.128	16.244	4.101	73.874	10.023	1.561	19.453	5.792	0.521	9.189	4.255	0.281
28				255.789	16.846	4.411	79.021	10.394	1.679	20.809	6.006	0.561	9.829	4.413	0.303
29				272.965	17.448	4.731	84.327	10.766	1.801	22.206	6.221	0.601	10.489	4.570	0.325
30				290.652	18.049	5.063	89.791	11.137	1.928	23.645	6.435	0.644	11.169	4.728	0.347
32							101.191	11.879	2.193	26.647	6.864	0.732	12.587	5.043	0.395
34							113.215	12.622	2.476	29.813	7.293	0.827	14.082	5.358	0.446
36							125.857	13.364	2.776	33.142	7.722	0.927	15.655	5.673	0.500
38							139.112	14.107	3.093	36.633	8.151	1.033	17.304	5.989	0.557
40							152.975	14.849	3.427	40.283	8.580	1.144	19.028	6.304	0.618
42							167.442	15.592	3.778	44.093	9.009	1.261	20.827	6.619	0.681
44							182.507	16.334	4.147	48.060	9.438	1.384	22.701	6.934	0.747
46							198.168	17.076	4.532	52.184	9.867	1.513	24.649	7.249	0.817
48							214.420	17.819	4.935	56.463	10.296	1.648	26.671	7.564	0.889
50							231.259	18.561	5.355	60.898	10.725	1.788	28.765	7.880	0.965
55							275.904	20.417	6.479	72.654	11.798	2.163	34.319	8.668	1.168
60							324.147	22.274	7.711	85.358	12.870	2.574	40.319	9.456	1.390
65							375.943	24.130	9.049	98.997	13.943	3.021	46.762	10.244	1.631
70							431.249	25.986	10.495	113.561	15.015	3.504	53.641	11.032	1.891
75							490.027	27.842	12.048	129.039	16.088	4.023	60.952	11.820	2.171
80							552.241	29.698	13.708	145.422	17.160	4.577	68.691	12.607	2.470
85							617.860	31.554	15.475	162.701	18.233	5.167	76.853	13.395	2.789
90							686.852	33.410	17.349	180.869	19.305	5.793	85.435	14.183	3.127
95							759.190	35.267	19.331	199.918	20.378	6.454	94.433	14.971	3.484
100							834.846	37.123	21.419	219.840	21.450	7.151	103.843	15.759	3.860
110										262.281	23.595	8.653	123.890	17.335	4.671
120										308.142	25.740	10.298	145.553	18.911	5.559
130										357.380	27.885	12.086	168.811	20.487	6.524
140										409.955	30.030	14.016	193.645	22.063	7.566
150										465.831	32.175	16.090	220.039	23.639	8.685

NOTES: Suction Velocities should not exceed 8 feet per second.

REFERENCES - FRICTION LOSS


WATER IN 100' OF STEEL PIPE

GPM	Pipe Size 2" - Actual Size 2.067			Pipe Size 2-1/2" - Actual Size 2.469			Pipe Size 3" - Actual Size 3.068			Pipe Size 3-1/2" - Actual Size 3.548		
	Friction	Vel. (ft/sec)	Vel. Head (ft)	Friction	Vel. (ft/sec)	Vel. Head (ft)	Friction	Vel. (ft/sec)	Vel. Head (ft)	Friction	Vel. (ft/sec)	Vel. Head (ft)
2	0.022	0.191	0.001									
3	0.047	0.287	0.001	0.020	0.201	0.001						
4	0.079	0.383	0.002	0.033	0.268	0.001						
5	0.120	0.478	0.004	0.051	0.335	0.002	0.018	0.217	0.001	0.009	0.162	0.000
6	0.168	0.574	0.005	0.071	0.402	0.003	0.025	0.260	0.001	0.012	0.195	0.001
7	0.224	0.670	0.007	0.094	0.469	0.003	0.033	0.304	0.001	0.016	0.227	0.001
8	0.286	0.765	0.009	0.121	0.536	0.004	0.042	0.347	0.002	0.021	0.260	0.001
9	0.356	0.861	0.012	0.150	0.603	0.006	0.052	0.391	0.002	0.026	0.292	0.001
10	0.433	0.957	0.014	0.182	0.670	0.007	0.063	0.434	0.003	0.031	0.325	0.002
11	0.516	1.052	0.017	0.218	0.737	0.008	0.076	0.477	0.004	0.037	0.357	0.002
12	0.607	1.148	0.020	0.256	0.804	0.010	0.089	0.521	0.004	0.044	0.389	0.002
13	0.704	1.244	0.024	0.296	0.871	0.012	0.103	0.564	0.005	0.051	0.422	0.003
14	0.807	1.339	0.028	0.340	0.938	0.014	0.118	0.608	0.006	0.058	0.454	0.003
15	0.917	1.435	0.032	0.386	1.005	0.016	0.134	0.651	0.007	0.066	0.487	0.004
16	1.034	1.531	0.036	0.435	1.072	0.018	0.151	0.694	0.007	0.075	0.519	0.004
17	1.157	1.626	0.041	0.487	1.139	0.020	0.169	0.738	0.008	0.083	0.552	0.005
18	1.286	1.722	0.046	0.542	1.206	0.023	0.188	0.781	0.009	0.093	0.584	0.005
19	1.421	1.818	0.051	0.599	1.273	0.025	0.208	0.825	0.011	0.103	0.617	0.006
20	1.563	1.913	0.057	0.658	1.340	0.028	0.229	0.868	0.012	0.113	0.649	0.007
21	1.711	2.009	0.063	0.720	1.407	0.031	0.250	0.911	0.013	0.123	0.681	0.007
22	1.865	2.105	0.069	0.785	1.474	0.034	0.273	0.955	0.014	0.135	0.714	0.008
23	2.025	2.200	0.075	0.853	1.541	0.037	0.296	0.998	0.015	0.146	0.746	0.009
24	2.191	2.296	0.082	0.923	1.608	0.040	0.321	1.042	0.017	0.158	0.779	0.009
25	2.363	2.391	0.089	0.995	1.675	0.044	0.346	1.085	0.018	0.171	0.811	0.010
26	2.541	2.487	0.096	1.070	1.742	0.047	0.372	1.128	0.020	0.183	0.844	0.011
27	2.724	2.583	0.104	1.148	1.809	0.051	0.399	1.172	0.021	0.197	0.876	0.012
28	2.914	2.678	0.112	1.227	1.876	0.055	0.427	1.215	0.023	0.210	0.909	0.013
29	3.110	2.774	0.120	1.310	1.943	0.059	0.455	1.259	0.025	0.224	0.941	0.014
30	3.312	2.870	0.128	1.395	2.010	0.063	0.485	1.302	0.026	0.239	0.974	0.015
32	3.732	3.061	0.146	1.572	2.144	0.071	0.546	1.389	0.030	0.269	1.038	0.017
34	4.175	3.252	0.164	1.759	2.278	0.081	0.611	1.476	0.034	0.301	1.103	0.019
36	4.642	3.444	0.184	1.955	2.412	0.090	0.679	1.562	0.038	0.335	1.168	0.021
38	5.130	3.635	0.205	2.161	2.546	0.101	0.751	1.649	0.042	0.370	1.233	0.024
40	5.642	3.826	0.228	2.376	2.680	0.112	0.826	1.736	0.047	0.407	1.298	0.026
42	6.175	4.018	0.251	2.601	2.814	0.123	0.904	1.823	0.052	0.446	1.363	0.029
44	6.731	4.209	0.275	2.835	2.948	0.135	0.985	1.910	0.057	0.486	1.428	0.032
46	7.308	4.400	0.301	3.078	3.083	0.148	1.070	1.996	0.062	0.527	1.493	0.035
48	7.908	4.592	0.328	3.331	3.217	0.161	1.158	2.083	0.067	0.571	1.558	0.038
50	8.529	4.783	0.356	3.592	3.351	0.174	1.248	2.170	0.073	0.616	1.623	0.041
55	10.175	5.261	0.430	4.286	3.686	0.211	1.490	2.387	0.089	0.734	1.785	0.050
60	11.955	5.740	0.512	5.035	4.021	0.251	1.750	2.604	0.105	0.863	1.947	0.059
65	13.865	6.218	0.601	5.840	4.356	0.295	2.030	2.821	0.124	1.001	2.109	0.069
70	15.905	6.696	0.697	6.699	4.691	0.342	2.328	3.038	0.143	1.148	2.272	0.080
75	18.072	7.174	0.800	7.612	5.026	0.393	2.646	3.255	0.165	1.304	2.434	0.092
80	20.367	7.653	0.910	8.578	5.361	0.447	2.981	3.472	0.187	1.470	2.596	0.105
85	22.787	8.131	1.028	9.598	5.696	0.504	3.336	3.689	0.212	1.644	2.758	0.118
90	25.331	8.609	1.152	10.669	6.031	0.565	3.708	3.906	0.237	1.828	2.921	0.133
95	27.999	9.088	1.284	11.793	6.366	0.630	4.099	4.123	0.264	2.021	3.083	0.148
100	30.789	9.566	1.422	12.968	6.701	0.698	4.507	4.340	0.293	2.222	3.245	0.164
110	36.733	10.523	1.721	15.472	7.371	0.845	5.377	4.774	0.354	2.651	3.570	0.198
120	43.156	11.479	2.048	18.177	8.041	1.005	6.317	5.208	0.422	3.114	3.894	0.236
130	50.052	12.436	2.404	21.081	8.711	1.180	7.327	5.642	0.495	3.612	4.219	0.277
140	57.416	13.392	2.788	24.183	9.382	1.368	8.405	6.076	0.574	4.144	4.543	0.321
150	65.241	14.349	3.200	27.479	10.052	1.570	9.550	6.510	0.659	4.708	4.868	0.368



NOTES: Suction Velocities should not exceed 8 feet per second.

REFERENCES - PIPE FITTINGS

CONNECTIONS

Friction losses in terms of equivalent lengths of standard pipe					
Pipe Size	Standard 90° Elbow	Long Radius Elbow	45° Elbow	Tee	Return Bend
					
1/2"	1.5	1.1	0.77	3.4	3.8
3/4"	2.2	1.4	1	4.5	5
1"	2.7	1.7	1.3	5.8	6.1
1-1/4"	3.7	2.4	1.6	7.8	8.5
1-1/2"	4.3	2.8	2	9	10
2"	5.5	3.5	2.5	11	13
2-1/2"	6.5	4.2	3	14	15
3"	8.1	5.1	3.8	17	18
3-1/2"	9.5	6	4.4	19	21
4"	11	7	5	22	24
4-1/2"	12	7.9	5.6	24	27
5"	14	8.9	6.1	27	31
6"	16	11	7.7	33	37

VALVES

Friction losses in terms of equivalent lengths of standard pipe				
Pipe Size	Gate Valve Open	Globe Valve Open	Angle Valve Open	Swing Check Valve
				
1/2"	0.35	16	8.4	4
3/4"	0.47	22	12	5
1"	0.6	27	15	7
1-1/4"	0.8	37	18	9
1-1/2"	0.95	44	22	11
2"	1.2	57	28	13
2-1/2"	1.4	66	33	16
3"	1.7	85	42	20
3-1/2"	2	99	50	
4"	2.3	110	58	26
4-1/2"	2.6	130	61	
5"	2.9	140	70	33
6"	3.5	160	83	39

REFERENCES - PRESSURE LOSS

SWING CHECK VALVES

Flow GPM	Pressure Loss (PSI)/Valve Size							
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"
2	0.2							
3	.05							
6	1.0	0.3						
8	1.7	0.5						
10	2.6	0.8	0.3					
12	3.6	1.1	0.5					
14	4.8	1.5	0.6					
16		2.0	0.9					
18		2.4	1.0					
20		3.0	1.2	0.4				
22		3.5	1.4	0.5				
24		4.1	1.7	0.6				
26		4.8	2.0	0.7	0.4			
28			2.2	0.8	0.5			
30			2.5	0.9	0.5			
32			2.9	1.1	0.6			
34			3.2	1.2	0.6			
36			3.6	1.3	0.7			
38			3.9	1.5	0.8			
40			4.3	1.6	0.8	0.3		
42			4.7	1.7	0.9	0.3		
44				1.9	1.0	0.4		
46				2.1	1.1	0.4		
48				2.2	1.2	0.5		
50				2.4	1.3	0.5		
55				2.9	1.5	0.6		
60				3.4	1.8	0.7		
65				3.9	2.0	0.8		
70				4.5	2.4	0.9	0.4	
75					2.7	1.0	0.5	
80					3.0	1.2	0.6	
90					3.7	1.5	0.7	
100					4.6	1.8	0.9	0.4
120						2.5	1.2	0.5
140						3.3	1.6	0.7

BRONZE GATE VALVES

Flow GPM	Pressure Loss (PSI)/Valve Size								
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
1									
2	.01								
5	.06	.02							
8	.16	.05	.02						
10	.24	.08	.03	.01					
15		.17	.06	.02	.01				
20		.31	.11	.03	.02				
30			.24	.07	.04	.01			
40			.43	.13	.07	.02	.01		
50			.67	.21	.11	.04	.02		
60				.30	.15	.05	.03	.01	
80				.54	.28	.10	.05	.02	
100					.43	.15	.07	.03	
120					.62	.22	.10	.04	.02
140					.85	.30	.14	.06	
160						.40	.18	.07	.03



REFERENCES - PRESSURE LOSS

WATER METERS AWWA STANDARD

Flow GPM	Pressure Loss (Normal Size)						
	5/8"	3/4"	1"	1-1/2"	2"	3"	4"
1	0.2	0.1					
2	0.3	0.2					
3	0.4	0.3					
4	0.6	0.5	0.1				
5	0.9	0.6	0.2				
6	1.3	0.7	0.3				
7	1.8	0.8	0.4				
8	2.3	1.0	0.5				
9	3.0	1.3	0.6				
10	3.7	1.6	0.7				
11	4.4	1.9	0.8				
12	5.1	2.2	0.9				
13	6.1	2.6	1.0				
14	7.2	3.1	1.1				
15	8.3	3.6	1.2				
16	9.4	4.1	1.4	0.4			
17	10.7	4.6	1.6	0.5			
18	12.0	5.2	1.8	0.6			
19	13.4	5.8	2.0	0.7			
20	15.0	6.5	2.2	0.8			
22		7.9	2.8	1.0			
24		9.5	3.4	1.2			
26		11.2	4.0	1.4			
28		13.0	4.6	1.6			
30		15.0	5.3	1.8	0.7		
32			6.0	2.1	0.8		
34			6.9	2.4	0.9		
36			7.8	2.7	1.0		
38			8.7	3.0	1.2		
40			9.6	3.3	1.3		
42			10.6	3.6	1.4		
44			11.7	3.9	1.5		
46			12.8	4.2	1.6		
48			13.9	4.5	1.7		
50			15.0	4.9	1.9		
52				5.3	2.1		
54				5.7	2.2		
56				6.2	2.3		
58				6.7	2.5		
60				7.2	2.7	1.0	
65				8.3	3.2	1.1	
70				9.8	3.7	1.3	
75				11.3	4.3	1.5	
80				12.8	4.9	1.6	0.7
90				16.1	6.2	2.0	0.8
100				20.0	7.8	2.5	0.9
110					9.5	2.9	1.0
120					11.3	3.4	1.2
130					13.0	3.9	1.4
140					15.1	4.5	1.6
150					17.3	5.1	1.8

REFERENCES - PRESSURE TANK SIZING

PROPER SYSTEM LIFE MINIMUM TANK VOLUMES

Pump Capacity		Minimum Drawdown	Total Tank Volume (Gallons)								
			Switch Setting (PSI)								
			20-40			30-50			40-60		
GPH	GPM	Gallons	A	B	C	A	B	C	A	B	C
240	4	4	10	15	25	15	15	40	15	15	55
300	5	5	15	15	30	15	20	50	20	20	70
360	6	6	15	20	40	20	20	60	20	25	85
420	7	7	20	20	45	35	25	70	25	30	100
480	8	8	20	25	50	35	25	80	30	30	110
540	9	9	25	25	60	30	30	90	35	35	125
600	10	10	30	30	65	30	35	100	40	40	140
660	11	12	35	35	80	40	40	120	45	45	165
720	12	13	35	40	85	40	45	130	50	50	180
780	13	15	40	45	100	50	50	150	55	60	210
840	14	17	45	50	110	55	55	170	65	65	235
900	15	19	50	55	125	60	65	190	70	75	265
960	16	20	55	55	160	65	65	200	75	75	280
1020	17	23	6	65	150	75	75	230	85	90	320
1080	18	25	70	70	160	80	85	250	95	95	350
1140	19	27	75	75	175	85	90	270	100	105	375
1200	20	30	80	85	195	95	100	300	110	115	415
1260	21	33	90	90	215	105	110	330	125	125	460
1320	22	36	100	100	235	115	120	360	135	135	500
1380	23	38	105	105	345	125	125	380	140	145	530
1440	24	41	110	115	365	135	135	410	155	155	570
1500	25	44	120	120	385	140	145	440	165	165	610
1560	26	47	130	130	305	150	155	470	175	180	655
1620	27	50	135	140	325	160	165	500	185	190	700
1680	28	53	145	145	345	170	175	530	200	200	735
1740	29	57	155	160	370	185	185	570	215	215	790
1800	30	60	165	165	390	195	195	600	225	225	835

NOTES: A = Bladder or Diaphragm Tank Design; B = Floating Wafer Tank Design; C = Plain Steel Tank Design



REFERENCES - REFERENCE TABLES

EQUIVALENT VALUES OF PRESSURE

Inches of Mercury	Feet of Water	PSI
1	1.13	0.49
2	2.26	0.98
3	3.39	1.47
4	4.52	1.95
5	5.65	2.44
6	6.78	2.93
7	7.91	3.42
8	9.04	3.91
9	10.17	4.4
10	11.3	4.89
11	12.45	5.39
12	13.57	5.87
13	14.7	6.37
14	15.82	6.86
15	16.96	7.35
16	18.09	7.84
17	19.22	8.33
18	20.35	8.82
19	21.75	9.31
20	22.6	9.8
21	23.78	10.3
22	24.88	10.8
23	26	11.28
24	27.15	11.75
25	26.26	12.25
26	29.4	12.73
27	30.52	13.23
28	31.65	13.73
29	32.8	14.22
29.929	33.947	14.697

PROPERTIES OF WATER

Water Temperature (°F)	Water Pressure (ft)
60	0.59
70	0.84
80	1.17
90	1.61
100	2.19
110	2.94
120	3.91
130	5.14
140	6.67
150	8.58
160	10.9
170	13.8
180	17.3
190	21.6
200	26.6
210	32.6
212	34

ATMOSPHERIC PRESSURE AT VARIOUS ELEVATIONS

Altitude	Atmospheric Pressure		
Feet Above Sea Level	Pounds per Square Inch (PSI)	Feet of Water	Inches of Mercury
Sea Level	14.7	33.8	29.9
500	14.4	33.3	29.4
1000	14.2	32.6	28.8
2000	13.7	31.4	27.8
3000	13.2	30.3	26.8
4000	12.7	29.2	25.8
5000	12.2	28.2	24.9
6000	11.8	27.1	24
7000	11.3	26.1	23.1
8000	10.9	25.1	22.2
9000	10.5	24.2	21.4
10000	10.1	23.2	20.6

REFERENCES - CONVERSIONS

HEAD

To Convert From	To	Multiply By
PSI	Feet	2.31
PSI	Inches of Mercury	2.04
Feet	PSI	0.433
Feet	Meters	0.305
Feet	Inches of Mercury	0.885
Inches of Mercury	Feet of Water	1.132
Meters	Feet	3.28
Kilograms per sq. in	PSI	14.22
ATM	PSI	14.7
ATM	Feet of Water	34
ATM	Meters of Water	10.35

VOLUME

To Convert From	To	Multiply By
Gallons	Liters	3.785
Gallons	Cubic Inches	231
Gallons	Cubic Feet	0.137
Gallons	Cubic Meters	0.004
Liters	Gallons	0.264
Barrel (Oil)	Gallons	42
Cubic Feet	Gallons	7.48
Cubic Feet	Cubic Meters	0.028
Acre Foot	Cubic Feet	43560
Acre Foot	Gallons	325829
Acre Inch	Cubic Feet	3630
Acre Inch	Gallons	27100

CAPACITY

To Convert From	To	Multiply By
Gallons Per Minute	Liters/Sec.	0.063
Gallons Per Minute	Liters/Hr.	227.1
Gallons Per Minute	Cubic Meters/Hr.	0.227
Gallons Per Minute	Cubic Feet/Sec.	0.002
Gallons Per Minute	Pounds Per Hour	500
Cubic Meters/Hr.	Gallons Per Minute	4.402
Cubic Meters/Hr.	Liters/Sec.	0.278
Cubic Feet/Sec.	Gallons Per Minute	448.831
Acre Foot	Gallons	325.85
Acre Foot per Day	Gallons Per Minute	227
Acre Inch per Hour	Gallons Per Minute	454
Liter per Second	Gallons Per Minute	15.85
Miner's Inch (ID,KS,NE, NM,ND,SD,UT,WA)	Gallons Per Minute	9
Miner's Inch (AZ, CA, MT, NV, OR)	Gallons Per Minute	11.22

NOTES: 1,000,000 US gal./day = 695 US gal./minute

HORSEPOWER

To Convert From	To	Multiply By
hp	Kilowatts	0.746
hp	Ft lbs per minute	33000
hp	Ft lbs per second	550
Kilowatts	hp	1.341

LENGTH

To Convert From	To	Multiply By
Inches	Centimeters	2.54
Meters	Feet	3.28
Miles	Feet	5280
Rods	Feet	16.5

WEIGHT

To Convert From	To	Multiply By
Gallons	Pounds	8.33
Cubic Feet of Water	Pounds	62.35
Kilograms	Pounds	2.2

TEMPERATURE

To Convert From	To	Multiply By
Fahrenheit	Celsius	$5/9 \times (^{\circ}\text{F} - 32)$
Celsius	Fahrenheit	$9/5 \times (^{\circ}\text{C} + 32)$



REFERENCES - 2- OR 3-WIRE CABLE, 60 HZ

SERVICE ENTRANCE TO MOTOR MAXIMUM LENGTH

Motor Rating			60 °C Insulation - AWG Copper Wire Size (ft)												
Volts	HP	kW	14	12	10	8	6	4	3	2	1	0	00	000	0000
115	1/2	.37	100	160	250	390	620	960	1190	1460	1780	2160	2630	3140	3770
	1/2	.37	400	650	1020	1610	2510	3880	4810	5880	7170	8720			
	3/4	.55	300	480	760	1200	1870	2890	3580	4370	5330	6470	7870		
	1	.75	250	400	630	990	1540	2380	2960	3610	4410	5360	6520		
	1.5	1.1	190	310	480	770	1200	1870	2320	2850	3500	4280	5240		
	2	1.5	150	250	390	620	970	1530	1910	2360	2930	3620	4480		
	3	2.2	120	190	300	470	750	1190	1490	1850	2320	2890	3610		
	5	3.7	0	0	180	280	450	710	890	1110	1390	1740	2170	2680	
	7.5	5.5	0	0	0	200	310	490	610	750	930	1140	1410	1720	
230	10	7.5	0	0	0	0	250	390	490	600	750	930	1160	1430	1760
	15	11	0	0	0	0	170	270	340	430	530	660	820	1020	1260

Motor Rating			75 °C Insulation - AWG Copper Wire Size (ft)												
Volts	HP	kW	14	12	10	8	6	4	3	2	1	0	00	000	0000
115	1/2	.37	100	160	250	390	620	960	1190	1460	1780	2160	2630	3140	3770
	1/2	.37	400	650	1020	1610	2510	3880	4810	5880	7170	8720			
	3/4	.55	300	480	760	1200	1870	2890	3580	4370	5330	6470	7870	9380	
	1	.75	250	400	630	990	1540	2380	2960	3610	4410	5360	6520	7780	9350
	1.5	1.1	190	310	480	770	1200	1870	2320	2850	3500	4280	5240	6300	7620
	2	1.5	150	250	390	620	970	1530	1910	2360	2930	3620	4480	5470	6700
	3	2.2	120	190	300	470	750	1190	1490	1850	2320	2890	3610	4470	5550
	5	3.7	0	110	180	280	450	710	890	1110	1390	1740	2170	2680	3330
	7.5	5.5	0	0	120	200	310	490	610	750	930	1140	1410	1720	2100
230	10	7.5	0	0	0	160	250	390	490	600	750	930	1160	1430	1760
	15	11	0	0	0	0	170	270	340	430	530	660	820	1020	1260

1 Foot = .3048 Meter

Lengths in **BOLD** only meet the US National Electrical Code ampacity requirements for individual conductors 60 °C or 75 °C in free air or water, not in magnetic enclosures, conduit or direct buried. Lengths NOT in bold meet the NEC ampacity requirements for either individual conductors or jacketed 60 °C or 75 °C cable and can be in conduit- or direct-buried. Flat molded and web/ribbon cable are considered jacketed cable. If any other cable is used, the NEC and local codes should be observed.

Cable lengths allow for a 5% voltage drop running at maximum nameplate amperes. If 3% voltage drop is desired, multiply lengths by 0.6 to get maximum cable length. The portion of the total cable length, which is between the supply and single-phase control box with a line contactor, should not exceed 25% of total maximum allowable to ensure reliable contactor operation. Single-phase control boxes without line contactors may be connected at any point in the total cable length.

Values are based on copper wire. If aluminum wire is used, it must be two sizes larger than copper wire and oxidation inhibitors must be used on connections.

EXAMPLE: #12 copper wire = #10 aluminum wire. Contact Franklin Electric for 90 °C cable lengths.

WARRANTY INFORMATION

LIMITED WARRANTY*

Except as set forth in an Extended Warranty, for twelve (12) months from the date of installation, but in no event more than twenty-four (24) months from the date of manufacture, Franklin hereby warrants to the purchaser ("Purchaser") of Franklin's products that, for the applicable warranty period, the products purchased will (i) be free from defects in workmanship and material at the time of shipment, (ii) perform consistently with samples previously supplied and (iii) conform to the specifications published or agreed to in writing between the purchaser and Franklin. This limited warranty extends only to products purchased directly from Franklin. If a product is purchased other than from a distributor or directly from Franklin, such product must be installed by a Franklin Certified Installer for this limited warranty to apply. This limited warranty is not assignable or transferable to any subsequent purchaser or user.

- a. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, WRITTEN OR ORAL, STATUTORY, EXPRESS, OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. PURCHASER'S SOLE AND EXCLUSIVE REMEDY FOR FRANKLIN'S BREACH OF ITS OBLIGATIONS HEREUNDER, INCLUDING BREACH OF ANY EXPRESS OR IMPLIED WARRANTY OR OTHERWISE, UNLESS PROVIDED ON THE FACE HEREOF OR IN A WRITTEN INSTRUMENT MADE PART OF THIS LIMITED WARRANTY, SHALL BE FOR THE PURCHASE PRICE PAID TO FRANKLIN FOR THE NONCONFORMING OR DEFECTIVE PRODUCT OR FOR THE REPAIR OR REPLACEMENT OF NONCONFORMING OR DEFECTIVE PRODUCT, AT FRANKLIN'S ELECTION. ANY FRANKLIN PRODUCT WHICH FRANKLIN DETERMINES TO BE DEFECTIVE WITHIN THE WARRANTY PERIOD SHALL BE, AT FRANKLIN'S SOLE OPTION, REPAIRED, REPLACED, OR A REFUND OF THE PURCHASE PRICE PAID. Some states do not allow limitations on how long an implied warranty lasts, therefore, the limitations and exclusions relating to the products may not apply.
- b. WITHOUT LIMITING THE GENERALITY OF THE EXCLUSIONS OF THIS LIMITED WARRANTY, FRANKLIN SHALL NOT BE LIABLE TO THE PURCHASER OR ANY THIRD PARTY FOR ANY AND ALL (i) INCIDENTAL EXPENSES OR OTHER CHARGES, COSTS, EXPENSES (INCLUDING COSTS OF INSPECTION, TESTING, STORAGE, OR TRANSPORTATION) OR (ii) DAMAGES, INCLUDING CONSEQUENTIAL, SPECIAL DAMAGES, PUNITIVE OR INDIRECT DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS, LOST TIME AND LOST BUSINESS OPPORTUNITIES, REGARDLESS OF WHETHER FRANKLIN IS OR IS SHOWN TO BE AT FAULT, AND REGARDLESS OF WHETHER THERE IS OR THERE IS SHOWN TO HAVE BEEN A DEFECT IN MATERIALS OR WORKMANSHIP, NEGLIGENCE IN MANUFACTURE OR DESIGN, OR A FAILURE TO WARN.
- c. Franklin's liability arising out of the sale or delivery of its products, or their use, whether based upon warranty contract, negligence, or otherwise, shall not in any case exceed the cost of repair or replacement of the product and, upon expiration of any applicable warranty period, any and all such liability shall terminate.
- d. Without limiting the generality of the exclusions of this limited warranty, Franklin does not warrant the adequacy of any specifications provided directly or indirectly by a purchaser or that Franklin's products will perform in accordance with such specifications. This limited warranty does not apply to any products that have been subject to misuse (including use in a manner inconsistent with the design of the product), abuse, neglect, accident or improper installation or maintenance, or to products that have been altered or repaired by any person or entity other than Franklin or its authorized representatives.
- e. Unless otherwise specified in an Extended Warranty authorized by Franklin for a specific product or product line, this limited warranty does not apply to performance caused by abrasive materials, corrosion due to aggressive conditions or improper voltage supply.
- f. With respect to motors and pumps, the following conditions automatically void this limited warranty:
 1. Mud or sand deposits which indicate that the motor has been submerged in mud or sand.
 2. Physical damage as evidenced by bent shaft, broken or chipped castings, or broken or bent thrust parts.
 3. Sand damage as indicated by abrasive wear of motor seals or splines.
 4. Lightning damage (often referred to as high voltage surge damage).
 5. Electrical failures due to the use of non-approved overload protection.
 6. Unauthorized disassembly.

WARRANTY INFORMATION

LOST OR DAMAGED GOODS

Every carrier used by Franklin Electric, Inc. is required to verify and sign for the condition of and the number of pieces that are released to them for delivery. Our control and responsibility for any shipment ceases when the carrier signs the Bill of Lading. When you sign the Bill of Lading, you legally assume responsibility of the shipment being delivered. Please, thoroughly inspect each shipment immediately upon arrival.

If cartons, packages, or crates are received in short or damaged condition, it is important that you notify the driver and insist on a notation of the loss or damage across the face of the freight bill. Failure to do this could negate any opportunity you have to file a claim. Claims for short or damaged material must be filed in writing with the carrier immediately after delivery.

If concealed loss or damage is discovered, notify the carrier at once and request an inspection. It is also important that you do not discard the shipping carton or container. A concealed damage report should be made within ten (10) days of delivery of the shipment. The carrier's agent will make an inspection, and usually will grant a concealed damage notation. If you give the carrier a clear receipt for the goods that have been damaged in transit, you do so at your own risk and expense.

Due to frequent damage of heavy UPS shipments, Franklin Electric, Inc. does not ship orders over 75 lbs by UPS unless customer agrees to take full responsibility.

NOTES



