



SUBMITTAL INFORMATION

Iron Service Saddles - (FCD202-xxx-TAP style)



DUAL BAND EPOXY COATING IRON SERVICE SADDLES FOR USE ON DUCTILE IRON AND A/C PIPE

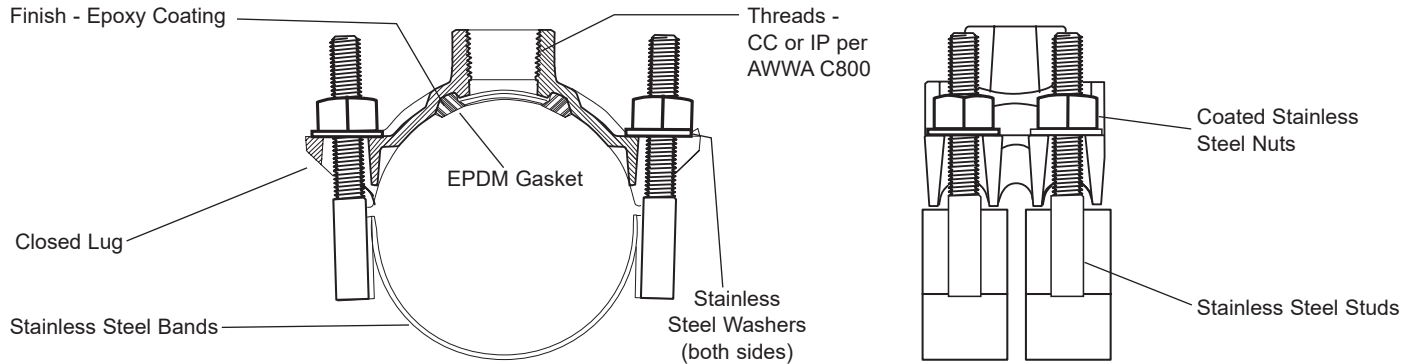

NOM. PIPE SIZE	O.D. RANGE (INCHES)	APPROX. WT. LBS.	CATALOG NUMBER	✓ SUBMITTED ITEM(S)
2"	2.35 - 2.50	2.8	FCD202-250-TAP	
2-1/2"	2.75 - 2.90	2.8	FCD202-290-TAP	
3"	*3.46 - 3.80	4.8	FCD202-380-TAP	
	*3.80 - 4.25	5.5	FCD202-425-TAP	
4"	**4.26 - 4.80	5.4	FCD202-480-TAP	
	▲4.74 - 5.00	5.4	FCD202-500-TAP	
	*4.74 - 5.26	5.4	FCD202-526-TAP	
	▲4.97 - 5.26	5.4	FCD202-526-TAP	
	*4.50 - 5.40	5.4	FCD202-540-TAP	
6"	5.94 - 6.69	5.7	FCD202-669-TAP	
	6.63 - 6.90	5.7	FCD202-690-TAP	
	6.84 - 7.60	6.7	FCD202-760-TAP	
	6.63 - 7.61	6.7	FCD202-761-TAP	
8"	7.93 - 8.71	6.8	FCD202-871-TAP	
	8.63 - 9.05	8.2	FCD202-905-TAP	
	8.99 - 9.79	8.4	FCD202-979-TAP	
	8.63 - 9.80	8.4	FCD202-980-TAP	
	10.00 - 10.75	9.4	FCD202-1075-TAP	
10"	10.75 - 11.10	9.0	FCD202-1110-TAP	
	11.10 - 12.12	10.8	FCD202-1212-TAP	
	10.64 - 12.13	10.8	FCD202-1213-TAP	
12"	12.00 - 12.75	11.0	FCD202-1275-TAP	
	12.75 - 13.20	9.0	FCD202-1320-TAP	
	13.20 - 14.38	12.8	FCD202-1438-TAP	
	12.62 - 14.39	12.8	FCD202-1439-TAP	
14"	15.30 - 16.25	11.9	FCD202-1625-TAP	
	16.30 - 17.25	12.9	FCD202-1725-TAP	
16"	17.40 - 18.40	13.1	FCD202-1840-TAP	
	18.50 - 19.25	12.3	FCD202-1925-TAP	
18"	19.50 - 20.50	13.1	FCD202-2050-TAP	
	21.20 - 22.20	13.2	FCD202-2220-TAP	
20"	22.50 - 23.50	13.3	FCD202-2350-TAP	
	23.80 - 24.80	13.4	FCD202-2480-TAP	
24"	25.60 - 26.50	13.9	FCD202-2650-TAP	
	31.74 - 32.74	14.8	FCD202-3274-TAP	

* Saddles with this pipe range are not available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

** These saddles with 1-1/4" through 2-1/2" taps fit the top of the listed range only. Example FCD202-480-CC7 fits 4.80" pipe O.D. only.

▲ This saddle is only available with 2" CC (CC7) or 2-1/2" IP (IP8) threads.

OUTLET TAP CODE

CC (AWWA) THREAD		
THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" CC	CC3	
1" CC	CC4	
1-1/4" CC	Δ CC5	
1-1/2" CC	CC6	
2" CC	CC7	

IP THREAD

THREAD	CODE NUMBER	✓ SUBMITTED ITEM(S)
3/4" IP	IP3	
1" IP	IP4	
1-1/4" IP	Δ IP5	
1-1/2" IP	IP6	
2" IP	IP7	
2-1/2" IP	IP8	

Δ Contact factory for availability

FEATURES

- Body made of high strength ductile iron per ASTM A536
- Each dual band and 5/8" UNC threaded studs are type 304 stainless steel. For saddles 3" or smaller, studs are 1/2"
- Gasket is EPDM rubber per ASTM D2000
- Finish on saddle body is fusion-bonded epoxy coating
- Certified to ANSI/NSF Standard 61
- Conforms to AWWA C800

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/06/22

Submitted By: